

# Coagulation–flocculation for lignin removal from wastewater – a review

Arfa Nawaz, Zaki Ahmed, Ali Shahbaz, Zahra Khan and Mohsin Javed

## ABSTRACT

Industrial discharge has tremendously increased inorganic pollutants in water bodies all over the world. Paper and pulp effluent is included in one of the most pollution generating discharges containing complex chemical compounds such as lignin. For clean and healthy water resources, the recovery of lignin from wastewater from the paper and pulp industry is of high importance. Available chemical and biological technologies for removal of lignin have certain drawbacks. Coagulation and flocculation is not only the economic but also the effective method for removal of lignin. The present review highlights available coagulants employed for removal of lignin from paper and pulp wastewater. Each coagulant is pH dependent and shows varied results with change in effluent characteristics. The hydrolysis products of aluminium-based coagulants, iron-based coagulants and copper sulphate have positive charges. These positive charges promote formation of flocs through charged neutralisation or sweep flocculation. In the case of titanium-based coagulants, hydrolysis product is negatively charged and mode is heterocoagulation. Ninety percent recovery of lignin is achieved by using a mixture of oxotitanium sulphate and aluminium sulphate and 80% with aluminium sulphate. Virtually complete recovery of lignin is observed with oxotitanium sulphate.

**Key words** | aluminium-based coagulants, coagulation, iron-based coagulants, lignin removal, sodium-based coagulants, titanium-based coagulants

**Arfa Nawaz** (corresponding author)

**Zaki Ahmed**

**Zahra Khan**

Comsats Institute of Information Technology,

M.A. Jinnah Campus, Defence Road,

Lahore (042) 111 001 007,

Pakistan

E-mail: [arfanawaz@ciitlahore.edu.pk](mailto:arfanawaz@ciitlahore.edu.pk)

**Ali Shahbaz**

University of Engineering and Technology (KSK

Campus),

Lahore,

Pakistan

**Mohsin Javed**

Sui Northern Gas Pipelines Limited.,

21-Industrial Area Gurumangot Road,

Gulberg-111,

Lahore,

Pakistan

## INTRODUCTION

Wastewater from the paper and pulp industry is highly contaminated having complex toxic substances. Visible contamination is imparted in the form of a high colour index. This colour comes from tannin resins, synthetic dyes, wood, lignin and its degradation products formed by reaction of chlorine and lignin (Sakam 1987). Lignin stands responsible for high colour index, turbidity and chemical oxygen demand (COD). Lignin is an aromatic compound difficult to oxidise biochemically at the wastewater treatment facilities existing at virtually all paper and pulp plants (Chernoberezhskii *et al.* 2002). The paper industry consumes a lot of water during the whole production process and produces a lot of contaminated wastewater. The pulp and paper industry is one of the heaviest users of water within the US industrial economy, requiring 54 m<sup>3</sup> on average of water per metric ton of finished product (Gunderson 2013). Economic treatment of wastewater is a real challenge. Several techniques have so far been developed to achieve optimised solution for

removal or recovery of lignin from paper-pulp waste. These include physical, chemical, biological and advanced engineered techniques. Biological treatments are not successful due to low biochemical oxygen demand (BOD) to COD ratio (ca. 0.2) and the presence of persistent organic compounds (Garg *et al.* 2005, 2007). It is also reported that lignin is difficult to oxidise biochemically (Chernoberezhskii *et al.* 2002). Among the chemical methods, the coagulation–flocculation method is considered one of the most economic, simple and efficient solutions for the removal of lignin. Coagulation–flocculation has been extensively utilised for treatment of paper-pulp industry wastewater (Wang *et al.* 2011), palm oil mill effluent (Ahmad *et al.* 2005), abattoir wastewater (Amuda & Alade 2006) and textile wastewater (Meric *et al.* 2005) for removal of lignin from wastewater. Other industries where coagulation is extensively used for wastewater treatment include semiconductor manufacturing, the dye industry, fish and meat industry and soft drink industry

(Livke *et al.* 1989; Tebai & Hadjivassilis 1992; Lin & Lin 1993; Tanimoto & Yamagishi 1997; Yamagushi 1997).

Coagulation serves as a primary treatment to remove toxicity, colour, COD and BOD (Pradeep *et al.* 2011). The coagulation process makes secondary treatment cost effective as it tends to reduce factors causing turbidity. Turbidity has chemical, physical and biological origins (Abolhassani & Astarai 2010). Lignin is a complex structured chemical compound with molecular formula  $C_9H_{10}O_2$ ,  $C_{10}H_{12}O_3$ ,  $C_{11}H_{14}O_4$ . The possible lignin structure is given in Figure 1.

Lignin is relatively hydrophobic and aromatic in nature. Computational simulation can also be used to study lignin structure (Glasser & Glasser 1974).

## COAGULATION CHEMISTRY AND MECHANISM

Coagulation is the process of separation of suspended organic particles from solution by making flocs for easy settlement. The coagulation process involves interactive forces between organic particles and coagulant, type and dosage of coagulant, pH and temperature. The coagulation mechanism takes place in a series of four steps starting with enmeshment, adsorption, charged neutralisation and finally precipitation.

A conceptual view of coagulation reaction is shown in the Figure 2.

The coagulation process can be even more simplified as two major steps of charged neutralisation and sweep

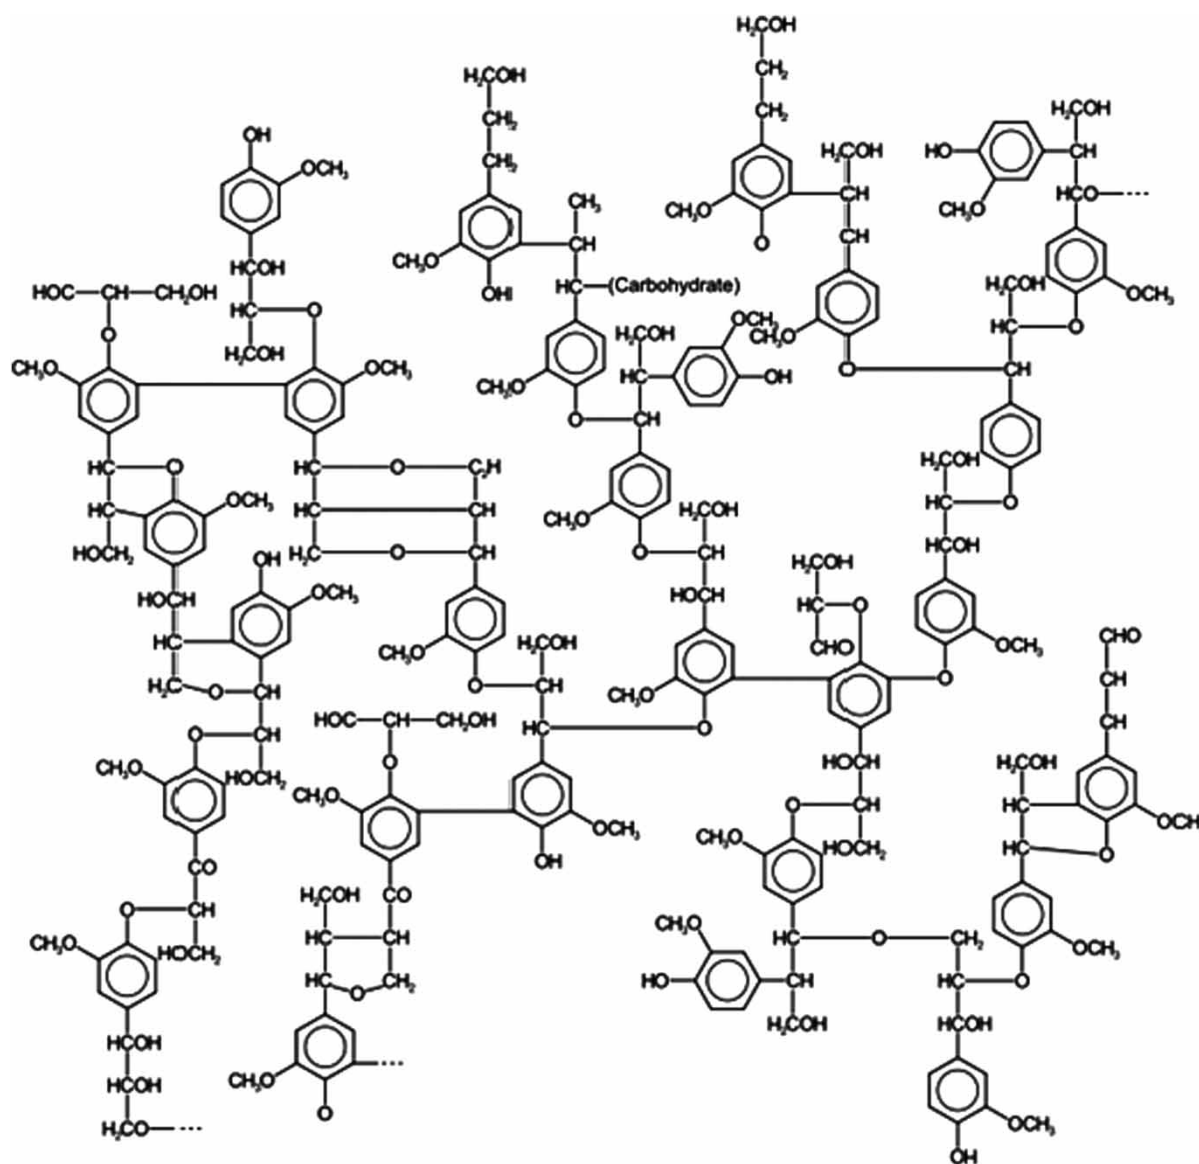


Figure 1 | Computational simulation of lignin structure (Glasser & Glasser 1974).

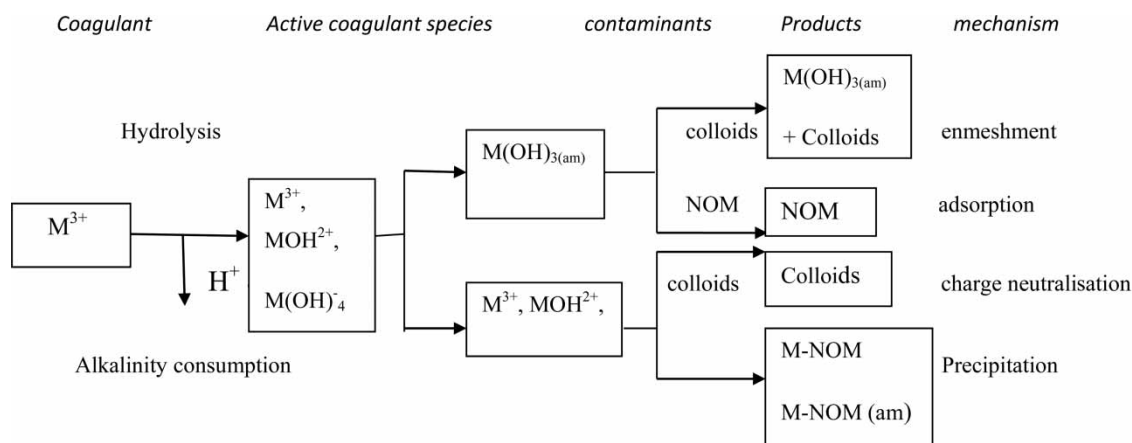


Figure 2 | Conceptual view of coagulation reaction.

flocculation. In sweep coagulation or flocculation, enmeshment and adsorption of impurities occur on cationic metal hydroxides resulting in precipitation of organic pollutants (Duan & Gregory 2003). Charge neutralisation takes place when negatively or positively charged particles are clouded with counter ionic particles. Attractive forces between opposite ions result in neutralised particles with no double layer. pH range, 4–5.5, is the most favourable pH range for charge neutralisation (Chang et al. 1993). Destabilisation of colloids is brought up by the addition of coagulant. The higher the valence of the counter-ion, the more is its destabilising effect and the less is the dose needed for coagulation. Once destabilised, colloids are adsorbed on the surface of added coagulant resulting in floc formation.

Several coagulants have been tried by researchers for lignin removal. Inorganic salts of iron and aluminium are predominantly used as coagulants for water treatment. Ammonium alum, aluminium sulphate and ferrous sulphate have been studied by Garg et al. (2010a). Aluminium chloride, modified natural polymer, starch-g-PAM-g-PDMC [polyacrylamide and poly(2-methacryloyloxyethyl)trimethyl ammonium chloride] was studied by Jian et al. (2011). Pradeep et al. (2011) studied coagulation using poly-aluminium chloride and copper sulphate. The effect of oxotitanium sulphate and its mixture with aluminium sulphate as coagulant was studied by Chernoberezhskii et al. (2002).

## FACTORS AFFECTING COAGULATION

Factors affecting coagulation are discussed in the following sub-sections.

### pH

The process of coagulation depends on pH. Each coagulant performs differently at different pH. The pH directly affects coagulation as it contributes to neutralisation of charged colloidal particles of lignin solution. Lignin forms negatively charged particles. Metal coagulant acidic in nature alters the alkalinity of system. High pH (alkaline media) promotes optimum coagulation with metal coagulants. For less acidic coagulants, lower alkalinity helps coagulation to proceed. Figure 3 shows the effect of pH on floc charge.

### Turbidity

The dose of coagulant is increased or decreased depending on the turbid nature of paper-pulp effluent. In low total organic content (TOC) raw waters, coagulation is controlled by turbidity of water. In this case, sufficient amount of coagulant is added to destabilise suspended colloids. To check the influence of turbidity on coagulation process, specific ultraviolet absorbance (SUVA) guidelines can be applied. But generally for higher value of turbidity, higher dose of coagulant is required. However, the relationship between turbidity and coagulant dose is not found to be linear.

### Temperature

The coagulation process is affected by temperature as change in temperature alters the solubility of coagulant, viscosity of process wastewater, kinetics of hydrolysis and flocculation. Certain coagulants work efficiently in cold water due to prehydrolysis as in the case of polyaluminium coagulants. Superiority of polyaluminium coagulants to

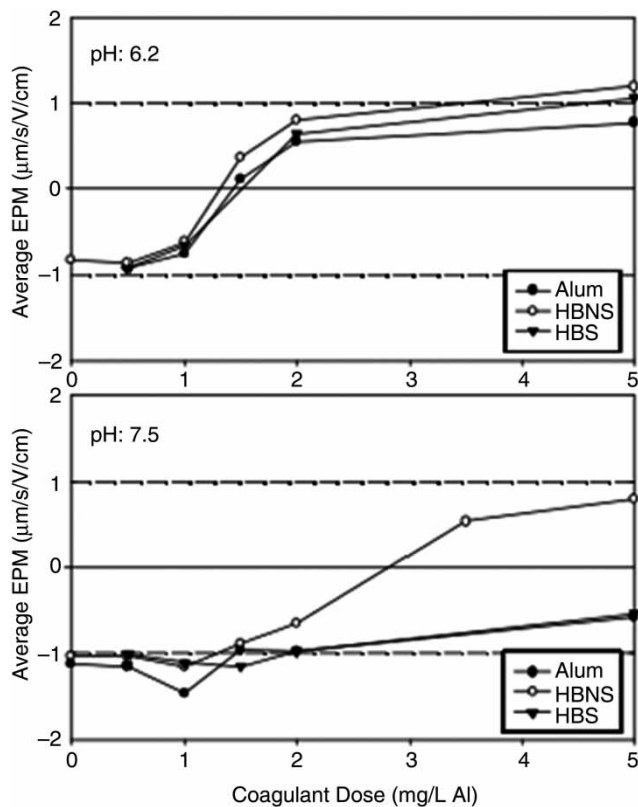


Figure 3 | Effect of pH on floc charge (Pernitsky 2003).

alums are reported widely in cold water (Pernitsky 2003). Low temperature slows down the coagulation process in the case of alums by decreasing the aggregation rate and rate constants. Furthermore floc structure is controlled by change in temperature. At low temperatures, alum flocs are found to be irregular in structure (Xiao et al. 2009).

## COAGULANTS USED FOR LIGNIN REMOVAL

### Aluminium-based coagulant

Aluminium chloride (Pradeep et al. 2011; Jian et al. 2011), aluminium sulphate (Chernoberezhskii et al. 2002; Garg et al. 2010a) and polyaluminium chloride (Pradeep et al. 2011) are well known coagulants tested for removal of lignin from wastewater. Results vary but the chemistry of aluminium remains unchanged. Soetopo (1984) conducted laboratory scale coagulation with alum and chlorinated copper and results showed significant reduction of suspended solids, COD, BOD and the colour for paper and pulp effluent samples. Alums are double sulphate salts, with a monovalent cation and trivalent metal ion. The

monovalent cation may be potassium or ammonium and trivalent metal ion may be aluminium or chromium (III). Alum used for coagulation treatment of paper and pulp discharge is  $KAl(SO_4)_2 \cdot 12H_2O$ . Coagulant requirement is found to be reduced with sulphuric acid used in conjunction with alum (Garg et al. 2010b). Hydrolysis products of alum are  $Al^{3+}$ ,  $Al(OH)^{2+}$  and  $Al(OH)_4^-$ . These ions are in equilibrium with amorphous  $Al(OH)_3(am)$ . (Hayden & Rubin 1974; Van de Ven & Alince 1996). Alum is insoluble in water at pH 6. At this value the maximum amount of alum is converted to solid flocs (Pernitsky 2003).

Aluminium sulphate also alum, is used for treatment of wastewater. When dosed in water it gives a positively charged ion. In pH range of 2–7, aluminium sulphate gives almost the complete recovery as hydrolysis product and lignin has opposite charges. Although workable pH range with aluminium sulphate is wider but recovery of lignin from wastewater is limited to 80% (Chernoberezhskii et al. 2002). Polyaluminium chloride gives polymeric aluminium species with high charges. Monomers are also formed as result of hydrolysis. The dominant polymeric is  $Al_{13}O_4(OH)_{24}(H_2O)_{12}^{7+}$  or simply  $Al_{13}^{7+}$  called the COAG. Characterisation of polyaluminium coagulants is given by degree of neutralisation or basicity. Alkalinity consumption is affected by basicity of coagulant. Higher basicity means high fraction of  $Al_{13}^{7+}$ .

When an aluminium ion is used as coagulant, the resulting formation of  $Al(OH)_3$  removes organic matter by adsorption on the  $Al(OH)_3(s)$  precipitate (Chang et al. 1993). At  $pH < 7$   $Al^{3+}$  is found and with higher pH it exists as  $Al(OH)_3$  (Ching et al. 1994). Aluminium cation induces sweep flocculation and adsorption and bridging enhancement of organic and inorganic solid forming large amorphous flocs (Jekel 1986). Aluminium cation promotes floc formation with a number of functional group (phenolic, hydroxyl and carboxylic) and ligands (Licsko 1993; Kirk-Othmer 1993). The summary of efficiency of aluminium-based coagulants is given in Table 1.

### Iron-based coagulants

Iron-based coagulants can be used over wider range of pH as ferric iron has much lower solubility compared to aluminium ion. The minimum solubility of Fe(III) is around pH 8.8 and due to weak positive charge of  $Fe(OH)_2^+$ ,  $FeCl_3$  is not a recommended coagulant for water treatment at its value of minimum solubility. Figure 4 shows the solubility of amorphous  $Fe(OH)_3$ .

**Table 1** | Summary of coagulants used for lignin removal with references

Coagulant	Chemical formula	Workable pH range	Coagulation mechanism	Hydrolysis product charge	Reported removal of studied parameter	Reference
Oxotitanium sulphate	TiOSO <sub>4</sub> · 2H <sub>2</sub> O	2 to 4	Heterocoagulation mechanism	Negative	Virtually complete KL recovery	Chernoberezhskii <i>et al.</i> (2002)
Aluminium sulphate	Al <sub>2</sub> (SO <sub>4</sub> ) <sub>3</sub> · 18 H <sub>2</sub> O	2 to 7	Charged neutralisation and sweep flocculation	Positive	80% KL recovery	Chernoberezhskii <i>et al.</i> (2002)
Mixture of oxotitanium sulphate and aluminium sulphate	TiOSO <sub>4</sub> · 2H <sub>2</sub> O + Al <sub>2</sub> (SO <sub>4</sub> ) <sub>3</sub> · 18 H <sub>2</sub> O	2 to 8	Parallel heterocoagulation	Multicomponent solution of both positive and negative charges	90% KL recovery	Chernoberezhskii <i>et al.</i> (2002)
Aluminium chloride	Al(Cl) <sub>3</sub>	2 to 8	Charged neutralisation and sweep flocculation	Positive	90% colour removal	Jian <i>et al.</i> (2011)
Polyaluminium chloride	PAC	2 to 8	Charged neutralisation and sweep flocculation	Positive	80% COD & 90% colour removal	Pradeep <i>et al.</i> (2011)
Copper sulphate	CuSO <sub>4</sub>	2 to 8	Sweep	Positive	74% COD & 76% colour removal	Pradeep <i>et al.</i> (2011)
Commercial alum	KAl(SO <sub>4</sub> ) <sub>2</sub> · 12 H <sub>2</sub> O	4.5 to 7	Sweep	Positive	63% COD & 90% colour removal	Garg <i>et al.</i> (2010a)
Ferrous sulphate	FeSO <sub>4</sub>	4 to 7	Sweep	Positive	60% cod removal	Garg <i>et al.</i> (2010a)
Electrocoagulation	N-A	4 to 7	Sweep	Positive	80% lignin removal (Al & Fe anode)	



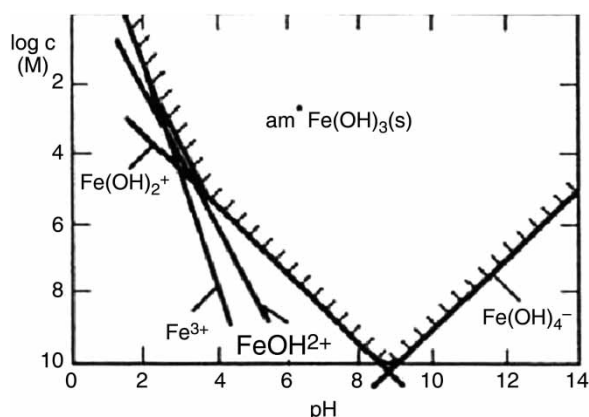



Figure 4 | Solubility of amorphous  $\text{Fe}(\text{OH})_3$  (Pernitsky 2003).

However, at pH as low as 5.5, effectiveness of iron coagulant is considerable. The iron-based coagulant hydrolysis product is pH dependent (Al-Malack *et al.* 1999).

Fe salts form monomeric and polymeric hydrates when added to wastewater (Stephenson & Duff 1996; Duan & Gregory 2003; Chaudhari *et al.* 2007). These ions are amorphous and hydrophobic (Jekel 1986). Ferric chloride and ferrous sulphate have been experimented as coagulants for removal of lignin from paper-pulp waste. Ferric chloride was found to be the best among all the coagulants used for paper and pulp effluent, showing 88 and 97% reductions in total carbon and colour, respectively (Sundin 2000).

### Copper-based coagulant


Pradeep *et al.* (2011) studied copper sulphate as coagulant for removal of lignin from paper-pulp waste. Copper sulphate, like aluminium chloride, dissolves in water forming metal ion hydrates. Monomeric and polymeric species can be generalised as polymeric species:  $\text{M}(\text{OH})^+$ ,  $\text{MOH}^{2+}$ ,  $\text{M}_2(\text{OH})_2^{4+}$ ,  $\text{M}(\text{OH})_4^{5+}$ ,  $\text{M}(\text{OH})_2^0$  (s) and  $\text{M}(\text{OH})_4^-$  etc. (Pradeep *et al.* 2011). The optimum pH value for copper sulphate is 5. Copper sulphate is also found to be a good oxidation catalyst. With increased dose of coagulant and pH,  $\text{Cu}(\text{OH})_2$  is precipitated in solution. The hydrolysis reaction of trivalent metal, Cu, (Ching *et al.* 1994) is given as:



### Titanium-based coagulant

Titanium-based coagulants have shown an advantage over aluminium and iron salt in the course of research development (Stremilova *et al.* 2001). Ti(IV) salt as coagulant was

experimented by Chernoberezhskii and it showed tremendous effective results as compared to common coagulant used for lignin removal. Oxotitanium sulphate was used as a mixture with aluminium sulphate over a wide range of concentrations and pH values to find optimum recovery of lignin (Chernoberezhskii *et al.* 2002). Increased concentration of  $\text{TiOSO}_4$  showed onset of lignin recovery at pH 6.2, a relatively lesser acidic media. Due to the unavailability of direct methods for studying the structure of such complexes and the inconsistency of the gathered data on their composition (Nazarenko *et al.* 1979), it is assumed the hydrolysis reaction follows as:



Titanium(IV) hydroxo aqua complexes have the composition  $[\text{Ti}^{4+}(\text{OH})_i(\text{H}_2\text{O})_{k-i}]^{(4-i)+}$ . Published data also reported that the coagulation mechanism for recovery of KL in presence of  $\text{TiOSO}_4$  is heterocoagulation. Results exhibit virtually complete removal of lignin using  $\text{TiOSO}_4$  as coagulant in pH range 2–4.

### Sodium-based coagulants

A very unconventional coagulant, sodium chloride, was tested (Chernoberezhskii *et al.* 2002). As an electrolyte, sodium chloride hydrolyses in water to produce  $\text{Na}^+$  and  $\text{Cl}^-$  ions. With supporting electrolyte, ion-ion electrostatic repulsion of lignin is weakened, resulting in floc formation and settling of lignin. Sodium sulphate is also the supporting electrolyte for lignin removal.


Table 1 shows the summary of coagulants used for the removal of lignin with workable pH ranges, mode of coagulation, hydrolysis product charges and reported percentage removal of studied parameters.

## PROGRESS

In recent years the approach to wastewater treatment has improved. Scientists not only make attempts to remove potential contaminants but also find ways to reuse those contaminants. Lignin has been reported to be used as fueling source (Shi *et al.* 2011), stabilisers for emulsions, and raw material for production of phenols, carbon fillers and binders. A combined acidification and PEO flocculation process was devised (Shi *et al.* 2011) to improve removal of lignin from PHL (pre-hydrolysis liquor) of Kraft-based dissolving pulp

production process. Back in 1995, the interaction of PEO (poly ethylene oxide), was comprehensively studied (Xiao et al. 1995; Takase & van de Ven 1996; van de Ven & Alinec 1996; Alinec & Van de Ven 1997; Wu et al. 2007). It was deduced that phenolic groups of lignin interacted with PEO to form complexes Y. PHL was first acidified with different concentrations of sulphuric acid and then treated with PEO. It was shown that acidification followed by flocculation by PEO increased lignin removal in pre-hydrolysis liquor to from 3.8 to 22% at specified pH of 2.

Another newer approach is electro-coagulation. In electro-coagulation process, suspended, emulsified or dissolved pollutants are destabilised by introduction of electrical current in aqueous medium. The driving force for this reaction is electro-motive force. During the reaction the elements or compounds attain more stability and become less soluble. Electro-coagulation has found successful application in treatment of various industrial wastewaters (Vik et al. 1984; Do & Chen 1994; Pouet & Grasmick 1995; Lin & Peng 1996; Naumczyk & Zilio-Grondi 1996; Tsai et al. 1997; Lin et al. 1998; Kovatcheva & Parlapanski 1999). In experimental research by Uğurlu et al. (2008), iron and aluminium electrodes were used owing to their cheapness and simplicity in production. As known, hydrolysis products of  $\text{Al}^{3+}$  and  $\text{Fe}^{3+}$  affect aggregation of particles in form of polymerisation given in formula:

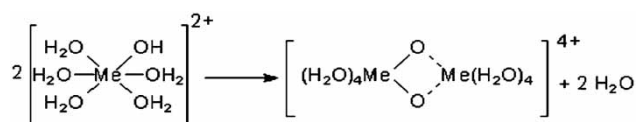

Al and Fe, used as anode, the electro-generated aluminium ions may form mono- or polymeric hydroxo-complexes which polymerise in pH range of 4–7. The aggregation of monomeric hydrolysis product is increased due to oversaturation and formation of amorphous hydroxide precipitate. This precipitate then enmeshes colloidal particles in ‘sweep floc’. Lignin is adsorbed on these aggregates. Small organic molecules are surrounded by amorphous hydroxide. Monomers and polymers are removed by sedimentation. Current densities were also an important factor in electro-coagulation. Higher lignin removal was observed with Al electrode as compared to Fe at lower current density.

## CONCLUSION

This paper reviews the progress made in removal of lignin from wastewater generated by paper and pulp industry. The

removal process is pH dependent. pH has a significant effect on lignin removal and optimum recovery occurs in alkaline range. Turbidity significantly affects the recovery of lignin; however the relationship between turbidity and the amount of coagulant used has not been clearly reported. The superiority of ferric chloride,  $\text{FeCl}_3$  as coagulant has been conclusively shown. Copper sulphate and titanium-based coagulants have been found to be superior to conventional coagulants used for removal of lignin. The removal of lignin has a large potential in research and processes such as combined acidification and PEO flocculation have proved successfully. Electro-coagulation also appears to be potentially useful technology. Parameters related to electrolysis for removal of lignin such as potential current density, nature of electrodes and ohmic resistance further needs to be explored. Sodium chloride, sodium sulphate and hydrochloric acid can also be used as coagulants and possibility of their use is yet to be explored.

## REFERENCES

- Abolhassani, Z. M. & Astaraie, A. 2010 Comparing copper sulfate, aluminum sulfate and ferric chloride in removing microbial and organic contaminations in municipal waste latex. *Aust. J. Basic Appl. Sci.* **4** (5), 887–892.
- Ahmad, A. L., Ismail, S. & Bhatia, S. 2005 Optimization of coagulation-flocculation process for palm oil mill effluent using response surface methodology. *Environ. Sci. Technol.* **39** (8), 2828–2834.
- Alinec, B. & Van de Ven, T. 1997 Effect of polyethyleneoxide and kraft lignin on the stability of clay and its deposition on the fibres. *Tappi J.* **80** (8), 181–186.
- Al-Malack, M. H., Abuzaied, N. S. & Elmubarak, A. H. 1999 Coagulation of polymeric wastewater discharge by a chemical factory. *Water Res.* **33**, 521–529.
- Amuda, O. S. & Alade, A. 2006 Coagulation/flocculation process in the treatment of abattoir wastewater. *Desalination* **196** (1–3), 22–23.
- Chang, Q., Fu, J. Y. & Li, Z. L. 1993 *Principles of Flocculation*. Lanzhou University Press, Lanzhou, China.
- Chaudhari, P. K., Mishra, I. M. & Chand, S. 2007 Decolourization and removal of chemical oxygen demand (COD) with energy recovery: treatment of biodigester effluent of a molasses-based alcohol distillery using inorganic coagulants. *Colloid Surf. A: Physicochem. Eng. Aspects* **296**, 238–247.
- Chernoberezhskii, Y. M., Dyagileva, A. B., Atanesyan, A. A. & Leshchenko, T. V. 2002 Influence of the kraft lignin concentration on the efficiency of its coagulation recovery from aqueous electrolyte solutions. *Macromol. Chem. Polymeric Mater.* **7**, 1166–1169.
- Ching, H. W., Tanaka, T. S. & Elimelech, M. 1994 Dynamics of coagulation of kaolin particles with ferric chloride. *Water Res.* **28** (3), 559–569.

- Do, J. S. & Chen, M. L. 1994 Decolorization of dye-containing solutions by electro coagulation. *J. Appl. Electrochem.* **24**, 785–790.
- Duan, J. & Gregory, J. 2003 Coagulation by hydrolyzing metal salts. *Adv. Colloid Inter-face* **100–102**, 475–502.
- Garg, A., Mishra, I. M. & Chand, S. 2005 Thermo-chemical precipitation as a pretreatment step for the COD and colour removal from pulp and paper mill effluent. *Ind. Eng. Chem. Res.* **44**, 2016–2026.
- Garg, A., Mishra, I. M. & Chand, S. 2007 Catalytic wet oxidation of the pretreated synthetic pulp and paper mill effluent under moderate conditions. *Chemosphere* **66**, 1799–2005.
- Garg, A., Mishra, I. M. & Chand, S. 2010a Effectiveness of coagulation and acid precipitation processes for the pre-treatment of diluted black liquor. *J. Hazard. Mater.* **180**, 158–164.
- Garg, A., Mishra, I. M. & Chand, S. 2010b Thermo-chemical precipitation as a pretreatment step for the COD and colour removal from pulp and paper mill effluent. *Ind. Eng. Chem. Res.* **44**, 2016–2026.
- Glasser, W. G. & Glasser, H. R. 1974 Simulation of reactions with lignin by computer (Simrel). II. A model for softwood lignin. *Holzforschung* **28** (1), 5–11.
- Gunderson, J. 2013 Industrial WaterWorld Correspondent, Water Treatment in the Pulp and Paper Industry, <http://www.waterworld.com/articles/iww/print/volume-12/issue-3/feature-editorial/water-treatment-in-the-pulp-and-paper-industry.html> (accessed on 3-7-2013).
- Hayden, P. L. & Rubin, A. J. 1974 Systematic investigation of the hydrolysis and precipitation of aluminum (III). *Aqueous Environmental Chemistry of Metal*. A. J. Rubin. Ann Arbor, pp. 318–379.
- Jekel, M. R. 1986 Interaction of humic acids and aluminium salts in the flocculation process. *Water Res.* **20**, 1535–1542.
- Jian-Ping Wang, Yong-Zhen Chen, Yi Wang, Shi-Jie Yuan & Han-Qing Yu. 2011 Optimization of the coagulation-flocculation process for pulp mill wastewater treatment using a combination of uniform design and response surface methodology. *Water Res.* **45**, 5633–5640.
- Kirk-Othmer 1993 *Encyclopedia of Chemical Technology*. Vol. 4, 4th edn, John Wiley, New York.
- Kovatcheva, V. K. & Parlapanski, M. D. 1999 Sono-electrocoagulation of iron hydroxides. *Colloid Interface A: Physicochem. Eng. Aspects* **149** (1–3), 603–608.
- Licsko, I. 1993 Dissolved organics removal by solid-liquid phase separation (adsorption and coagulation). *Water Sci. Technol.* **27**, 245–248.
- Lin, S. H. & Lin, C. M. 1993 Treatment of textile waste effluents by ozonation and chemical coagulation. *Water Res.* **27** (12), 1743.
- Lin, S. H. & Peng, C. F. 1996 Continuous treatment of textile wastewater by combined coagulation electrochemical oxidation and activated sludge. *Water Res.* **30**, 587–592.
- Lin, S. H., Shyu, C. T. & Sun, M. C. 1998 Saline wastewater treatment by electrochemical method. *Water Res.* **32**, 1059–1066.
- Livke, V. A., Ostrovka, V. I. & Gendroseva, N. P. 1989 Tertiary coagulation treatment of aniline dye industry wastewater. *Soviet J. Water Chem. Technol.* **11** (2), 115.
- Meric, S., Selcuk, H. & Belgiorno, V. 2005 Acute toxicity removal in textile finishing wastewater by Fenton's oxidation, ozone and coagulation-flocculation processes. *Water Res.* **39** (6), 1147–1153.
- Naumczyk, L. S. & Zilio-Grondi, F. 1996 Electrochemical treatment of textile wastewater. *Water Sci. Technol.* **34** (11), 17–24.
- Nazarenko, V. A., Antonovich, V. P. & Nev-skaya, E. A. 1979 *Gidroliz ionov metallov v razbavlennykh Rastvorakh (Hydrolysis of Metal Ions in Dilute Solutions)*. Atomizdat, Moscow.
- Pernitsky, D. J. 2003 Conference Tech Trans. Associated Engineering, Calgary, Alberta.
- Pouet, M. F. & Grasmick, A. 1995 Urban wastewater treatment by electrocoagulation and flotation. *Water Sci. Technol.* **31**, 275–283.
- Pradeep Kumar, Tjoon Tow Teng, Shri Chand, and Kailas L. 2011 Treatment of Paper and Pulp Mill Effluent by coagulation. *International Journal of Civil and Environmental Engineering* **3**, 3.
- Sakam, M. 1987 *Industrial Effluents, Origin Characteristics, Effects Analysis and Treatment*. Sakthi Publications, India.
- Shi, H., Fatehi, P., Xiao, H. & Ni, Y. 2011 A combined acidification/PEO flocculation process to improve the lignin removal from the pre-hydrolysis liquor of kraft-based dissolving pulp production process. *Bioresour. Technol.* **102**, 5177–5182.
- Soetopo, R. S. 1984 Effectiveness of coagulant used for pulp and paper mill effluent treatment. *Berita Selulosa* **20** (2), 46.
- Stephenson, R. J. & Duff, S. J. B. 1996 Coagulation and precipitation of a mechanical pulping effluent – I. Removal of carbon, colour and turbidity. *Water Res.* **30**, 781–792.
- Stremilova, N. N., Viktorovskii, I. V. & Zagel', V. V. 2001 *Zh. Obshch. Khim.* **71** (1), 21–24.
- Sundin, J. 2000 Precipitation of kraft lignin under alkaline conditions. Doctoral thesis. Department of Pulp and Paper Chemistry and Technology, Royal Institute of Technology, Stockholm, Sweden.
- Takase, H. & van de Ven, T. G. M. 1996 Effect of a cofactor on polymer bridging of latex particles to glass by polyethylene oxide. *Colloids Surf. A* **118**, 115–120.
- Tanimoto, K. & Yamagishi, K. 1997 Powdered chemical agents for treatment of wastewater from processing of meat and fish and the treatment process. *Japan Kokai Tokyo Koho* **A2** (14), 5.
- Tebai, L. & Hadjivassilis, I. 1992 Soft drinks industry wastewater treatment. *Water Sci. Technol.* **25** (1), 45.
- Tsai, C. T., Lin, S. T., Shue, Y. C. & Su, P. L. 1997 Electrolysis of soluble organic matter in leachate from landfills. *Water Res.* **31**, 3073–3081.
- Uğurlu, M., Gürses, A., Doğar, Ç. & Yalçın, M. 2008 The removal of lignin and phenol from paper mill effluents by electrocoagulation. *J. Environ. Mngt* **3**, 420–428.
- Van de Ven, T. G. M. & Alince, B. 1996 Association-induced polymer bridging: new insights into the retention of fillers with PEO. *J. Pulp Pap. Sci.* **22** (7), 257–265.
- Vik, E. A., Carlson, D. A., Eikum, A. S. & Gjessing, E. T. 1984 Electrocoagulation of potable water. *Water Res.* **18**, 1355–1360.
- Wang, J.-P., Chen, Y.-Z., Wang, Y., Yuan, S.-J. & Yu, H.-Q. 2011 Optimization of the coagulation-flocculation process for pulp mill wastewater treatment using a combination of uniform design and response surface methodology. *Water Res.* **45**, 5633–5640.



- Wu, M. R., Paris, J. & van de Ven, T. G. M. 2007 Flocculation of papermaking fines by poly (ethylene oxide) and various cofactors: effects of PEO entanglement, salt, and fines properties. *Colloids Surf. A* **303**, 211–218.
- Xiao, F., Huang, J.-C. H., Zhang, B.-j. & Cui, C.-w. 2009 Effects of low temperature on coagulation kinetics and floc surface morphology using alum. *Desalination* **237**, 201–213.
- Xiao, H. N., Pelton, R. & Hamielec, A. 1995 The association of aqueous phenolic resin with polyethylene oxide and Poly (Acrylamide-Co-Ethylene Glycol). *J. Polym. Sci. A: Polym. Chem.* **33** (15), 2605–2612.
- Yamagushi, H. 1997 Coagulation treatment of industrial wastewaters from silicon wafer manufacturing. *Japan Kokai Tokkyo Koho* **A2** (4), 7.

First received 23 April 2013; accepted in revised form 15 November 2013. Available online 27 November 2013