

Fig. 9(a) Normalized radius versus normalized time for the spark induced cavitation bubble shown in Fig. 4 (serial no. 2951)

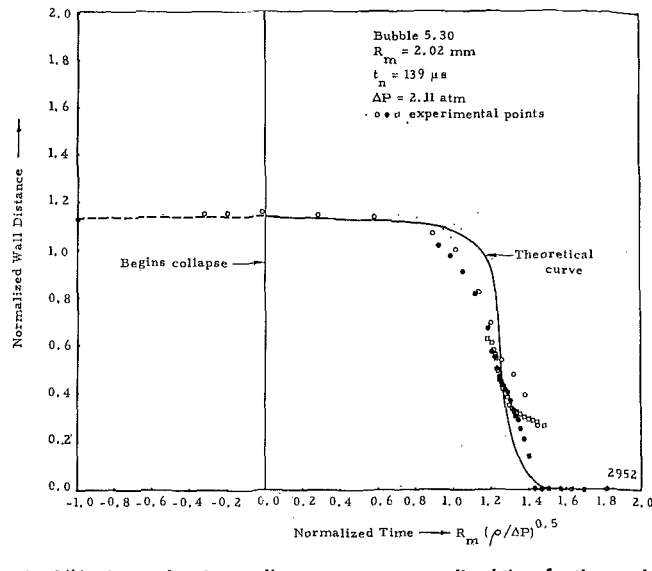


Fig. 9(b) Normalized wall distance versus normalized time for the spark induced cavitation bubble shown in Fig. 4 (serial no. 2952)

3 Ivany, R. D., and Hammitt, F. G., "Cavitation Bubble Collapse in Viscous Compressible Liquid-Numerical Analysis," *JOURNAL OF BASIC ENGINEERING*, TRANS. ASME, Series D, Vol. 87, No. 4, Dec. 1965, pp. 977-985.

4 Korovkin, A. N., Levkovskiy, Y. L., "Investigation of the Collapse of a Cavitating Bubble Near a Solid Wall," *Inzhenerofizicheskii zhurnal*, Vol. 12, No. 2, 1967, pp. 246-253.

5 Shima, A., "The Behavior of a Spherical Bubble in the Vicinity of a Solid Wall," *JOURNAL OF BASIC ENGINEERING*, TRANS. ASME, Series D, Vol. 9, No. 1, Mar. 1968, pp. 109-144.

6 Plesset, M. S., and Chapman, R. B., "Collapse of an Initially Spherical Vapor Cavity in the Neighborhood of a Solid Boundary," *Journal of Fluid Mechanics*, Vol. 47, No. 2, May 1971, p. 283.

7 Mitchell, T. M., "Numerical Studies of Asymmetric and Thermodynamic Effects on Cavitation Bubble Collapse," PhD dissertation, Nuclear Engineering Department, The University of Michigan, 1970; also available as ORA Report 03371-7-T, Univ. of Mich., 1970.

8 Mitchell, T. M., and Hammitt, F. G., "Collapse of a Spherical Bubble in a Pressure Gradient," 1970 Cavitation Forum, May 24-27, 1970, Detroit, Mich., pp. 44-46.

9 Burrill, L. C., "Sir Charles Parsons and Cavitation," *Trans. Institute of Marine Engineers*, Vol. 43, No. 8, No. 8, 1951, pp. 149-167.

10 Knapp, R. T., and Hollander, A., "Laboratory Investigations of the Mechanism of Cavitation," *TRANS. ASME*, Vol. 70, 1948, pp. 419-435.

11 Olson, H. G., "High Speed Photographic Studies of Ultrasonically-Induced Cavitation and Detailed Examination of Damage to Selected Materials," Doctoral Dissertation, Dept. of Nuclear Engr., University of Michigan, Aug. 1966. Also available as ORA Report 07738-2-T, University of Michigan, Aug. 1966.

12 Robinson, M. J., "On the Detailed Flow Structure and the Corresponding Damage to Test Specimens in a Cavitating Venturi," PhD thesis, Dept. of Nuclear Engineering, Laboratory of Fluid Flow and Heat Transport Phenomena, University of Michigan, 1965.

13 Robinson, M. J., and Hammitt, F. G., "Detailed Damage Characteristics in a Cavitating Venturi," *JOURNAL OF BASIC ENGINEERING*, TRANS. ASME, Series D, Vol. 89, No. 1, Mar. 1967, pp. 161-173.

14 Naude, C. F., and Ellis, A. T., "On the Mechanism of Cavitation Damage by Non-Hemispherical Cavities Collapsing in Contact With a Solid Boundary," *JOURNAL OF BASIC ENGINEERING*, TRANS. ASME, Series D, Vol. 83, No. 4, Dec. 1961, pp. 648-656.

15 Shutler, N. D., and Mesler, R. B., "A Photographic Study of the Dynamics and Damage Capabilities of Bubbles Collapsing Near Solid Boundaries," *JOURNAL OF BASIC ENGINEERING*, TRANS. ASME, Series D, Vol. 87, No. 2, June 1965, pp. 511-517.

16 Benjamin, T. B., "Cavitation in Liquids," Doctoral dissertation, Cambridge University, 1954.

17 Hammitt, F. G., "Cavitation Damage and Performance Research Facilities," *Symposium on Cavitation Research Facilities and Techniques*, ASME, 1964, pp. 175-184.

18 Kling, C. L., "A High Speed Photographic Study of Cavitation Bubble Collapse," Doctoral dissertation, Dept. of Nuclear Engineering, University of Michigan, 1970; also available as ORA Report 03371-2-T, University of Michigan, Mar. 1970.

19 Thomas, G. P., and Brunton, J. H., "Drop Impingement Erosion of Metals," *Proceedings of the Royal Society (London)*, Series A, Vol. 314, 1970, pp. 549-565.

20 Thomas, G. P., "The Initial Stages of Deformation in Metals Subjected to Repeated Liquid Impact," *Philosophical Transactions of the Royal Society*, Series A, Vol. 1110, No. 260, July 1966, pp. 140-143.

21 Cole, R. H., *Underwater Explosions*, Princeton University Press, 1948.

22 Vorotnikova, M. I., "Effect of the Heat-Emission Rate in an Underwater Electric Explosion on the Distribution of the Explosion Energy," *Zhurnal prikladnoy mekhaniki i tekhnicheskoy fiziki*, No. 2, 1962, pp. 110-112.

23 Gibson, D. C., "The Kinetic and Thermal Expansion of Vapour Bubbles," CSIRO, Division of Mechanical Engineering, Melbourne, Australia, 1970.

24 Huang, Y., "Numerical Studies of Unsteady, Two-Dimensional Liquid Impact Phenomena," PhD dissertation, Department of Mechanical Engineering, The University of Michigan, 1971; also available as ORA Report 03371-8-T, Univ. of Mich., 1971.

DISCUSSION

F. T. Dodge⁴

The authors are to be congratulated on a very well done piece of experimental work. Although this discussor has no quarrel with any of the observations or analyses, there are a few items that I believe deserve some further explanation. First, the jet impingement velocity of the bubbles is in the range of 50 to 100 m/sec (Table 1 of paper) while the high speed liquid jets, whose damage the bubble damage is compared to, apparently had a velocity of 600 to 700 m/sec. Would a lower speed liquid jet, perhaps of smaller diameter, produce damage comparable to the bubble induced damage? Second, the results indicate that no damage was induced by the collapse of a bubble initially attached to the wall. However, the analytical and experimental results of Naudé and Ellis (reference [14] in paper) seem to indicate that this type of bubble collapse is capable of producing damage. Do the authors have an explanation for this discrepancy?

⁴ Assistant Professor, Mechanical and Aerospace Engineering Department, University of Tennessee, Knoxville, Tenn.

Downloaded from http://micronanomanufacturing.asmedigitalcollection.asme.org/fluidengineering/article-pdf/94/4/832/5765238/832_1.pdf by guest on 21 June 2024

Authors' Closure

The questions raised by Professor Dodge are most readily explained with reference to the experimental equipment and impingement materials used for this investigation. Unfortunately, the apparatus used to produce the 600m/s liquid jets could not produce jets in the 100m/s range; however, the damage potential of the lower speed jets produced during bubble collapse is indicated by the "water hammer" pressure (Table 1). Therefore, the striking similarity in the damage pattern is the major comparison between the high speed liquid jets and the bubble collapse

produced, lower speed jets. The actual damage produced depended upon the impingement material. The 50 μ thick aluminum foil was soft enough to be damaged by the jets produced during each nearby bubble collapse, but hard enough not to be effected by the collapse of an attached bubble. When a stronger 500 μ thick aluminum foil was used to coat the wedge, only three pits were produced for 50 nearby bubble collapses, while the aluminum plate used by Naudé and Ellis was soft enough to be damaged by either the initiating spark or the jet produced by the collapse of the attached bubble.