

Model Exam Paper 1

Maximum marks: 100

Time: 3 hours

Answer all questions.

No additional support materials are permitted.

PART A (20 × 1 = 20)

1. _____ are good to transfer applied loads to the foundations of the platform.
2. Compliant platforms are based on a _____ concept of design.
3. The design of the geometric form of compliant structures is principally dominated by balancing the _____ and _____ of the platform.
4. The _____ is a unique component of an articulated tower, which connects it to the foundation system.
5. _____ use the friction between two surfaces to dissipate energy.
6. The natural frequency of a system can be measured experimentally using _____.
7. The yaw response of the deck is attributed to the _____ in the recentering capability of the buoyant legs under directional wave loads.
8. Due to fluctuating winds, compliant offshore structures are more susceptible to _____.
9. The steady wind velocity is measured at _____.
10. Wave and wind spectra are _____ and _____ banded, respectively.
11. Because a triceratops is a _____ structure, tether failure will not result in the complete collapse of the structure.

Offshore Compliant Platforms: Analysis, Design, and Experimental Studies,
First Edition. Srinivasan Chandrasekaran and R. Nagavinothini.

© 2020 John Wiley & Sons Ltd.

This Work is a co-publication between John Wiley & Sons Ltd and ASME Press.

12. Large, continuous ice sheets called _____ are formed due to ice cakes freezing together.
13. The ice sheet that remains attached to the shore developed during winter is called _____.
14. Level ice action induces _____ in offshore structures.
15. The design guidelines suggest _____ as the minimum collision energy for the design of offshore structures subject to ship–platform collisions.
16. _____ is calculated by multiplying the effective ice pressure and the contact area.
17. _____ is an appropriate scaling law for inertia and gravity forces.
18. Stiffening the buoyant legs of a triceratops _____ the tether tension.
19. Cyclic loading in a structural system may lead to _____.
20. In a BLSRP, the buoyant legs are connected to the deck by _____.

PART B (10 × 3 = 30)

1. What are the factors that influence the choice of a geometric form for an offshore structure?
2. Explain TLP mechanics.
3. What are viscous fluid dampers?
4. Explain the structural action of a BLSRP.
5. How do you find the damping ratio using the logarithmic decrement method?
6. Why is yaw motion observed in the deck of a BLSRP with a 0° wave heading angle?
7. List the widely used wave spectra in the hydrodynamic analysis of structures.
8. Draw the wind-generated current velocity profile.
9. What are the effects of wind, waves, and currents on sea ice?
10. List the factors that affect the ice load acting on an offshore structure.

PART C (5 × 10 = 50)

1. Briefly explain the structural action of a tension leg platform (TLP).
2. Explain passive control devices.
3. Write briefly about current.
4. Explain the major subsystems in a wind turbine.
5. Expand the following: *FSO*, *FPSO*, *FPU*, *TLP*, *TLD*, *TLCD*, *TMD*, *MLAT*, *DVA*, *BLSRP*.

Model Exam Paper 1: KEY

Maximum marks: 100

Time: 3 hours

Answer all questions.

No additional support materials are permitted.

PART A (20 × 1 = 20)

1. Fixed structures are good to transfer the applied loads to the foundations.
2. Compliant platforms are based on a relative displacement concept of design.
3. The design of the geometric form of compliant structures is principally dominated by balancing the buoyancy force and weight of the platform.
4. The universal joint is a unique component of an articulated tower, which connects it to the foundation system.
5. Frictional dampers use the friction between two surfaces to dissipate energy.
6. The natural frequency of a system can be measured experimentally using free-decay tests.
7. The yaw response of the deck is attributed to the time delay in the recentering capability of the buoyant legs under directional wave loads.
8. Due to fluctuating winds, compliant offshore structures are more susceptible to low-frequency oscillations.
9. The steady wind velocity is measured at 10.0 m above MSL.
10. Wave and wind spectra are narrow and wide banded, respectively.
11. Because a triceratops is a positively buoyant structure, tether failure will not result in the complete collapse of the structure.
12. Large, continuous ice sheets called ice floes are formed due to ice cakes freezing together.
13. The ice sheet that remains attached to the shore developed during winter is called shore-fast ice.
14. Level ice action induces random vibrations in offshore structures.
15. The design guidelines suggest 4.0 MJ as the minimum collision energy for the design of offshore structures subject to ship–platform collisions.
16. The maximum crushing ice force is calculated by multiplying the effective ice pressure and the contact area.
17. Froude scaling is an appropriate scaling law for inertia and gravity forces.
18. Stiffening the buoyant legs of a triceratops increases the tether tension.
19. Cyclic loading in a structural system may lead to fatigue failure.
20. In a BLSRP, the buoyant legs are connected to the deck by hinged joints.

PART B (10 × 3 = 30)

1. What are the factors that influence the choice of a geometric form for an offshore structure?
 - a) *Structural form with a stable configuration*
 - b) *Geometric form leading to low installation, fabrication, and decommissioning costs*
 - c) *Geometric form that requires a lower CAPEX and leads to a high return on investment (ROI)*
 - d) *Geometric form that can result in an early start for production and that possesses high mobility*
 - e) *Geometric form that requires the least possible intervention, so that uninterrupted production can take place*

2. Explain TLP mechanics.

When no load is applied on the structure, the structure is in a stationary, stable condition. Due to excess buoyancy, the tethers are in high tension so that the platform is held down to the seabed. Under lateral loading from wind, waves, or currents, the structure experiences a lateral displacement. The lateral displacement of the TLP is called offset. The offset condition of the TLP pulls down the structure. The vertical displacement is called setdown.

3. What are viscous fluid dampers?

- *A viscous fluid damper is similar to a conventional shock-absorber. It consists of a closed cylinder-piston, which is filled with fluid (usually silicon oil).*
- *These dampers are typically installed as diagonal braces in building frames (preferably steel structures).*
- *To provide optimal damping, buildings are often equipped with multiple dampers in place of diagonal beams on every floor.*

4. Explain the structural action of a BLSRP.

The structural action of a BLSRP under lateral loads is similar to other compliant offshore structures:

- a) *It is similar to a TLP, because a restraining system with tethers is common.*
- b) *It is similar to a spar platform, because each buoyant leg resembles a spar buoy due to the deep draft.*
- c) *It has articulated towers due to the presence of hinged joints. Therefore, a BLSRP is a hybrid compliant platform.*

5. How do you find the damping ratio using the logarithmic decrement method?


The damping ratio in the respective DOF is obtained by the logarithmic decrement method and is as follows:

$$\delta = \frac{1}{n} \ln \left(\frac{x_0}{x_n} \right)$$

where x_0 is the higher value of the two peaks. x_n is the value of the peak after n cycles. The damping ratio is determined by:

$$\zeta = \frac{1}{\sqrt{1 + \left(\frac{2\pi}{\delta} \right)^2}}$$


6. Why is yaw motion observed in the deck of a BLSRP with a 0° wave heading angle?
 As buoyant legs are symmetrically spread with respect to the vertical axis of the platform, it is imperative to envisage a non-uniform phase lag in the recentring process; this causes the yaw motion of the deck.
7. List the widely used wave spectra in the hydrodynamic analysis of structures.
 - a) Pierson-Moskowitz (PM)
 - b) JONSWAP
 - c) ISSC
 - d) Bredneidger
 - e) Ochi-Hubble
8. Draw the wind-generated current velocity profile.

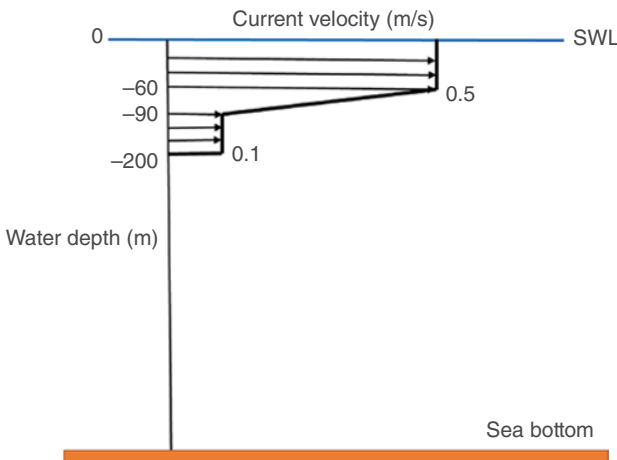

9. What are the effects of wind, waves, and currents on sea ice?
 - *The exposure of developed ice to the wind, waves, and currents lead to the deformation of the ice along with an increase in the brittleness of the ice crust.*
 - *The continuous action of wind, waves, and currents transforms this continuous flat ice sheet into pressure ice fields with rough surfaces.*
10. List the factors that affect the ice load acting on an offshore structure.
 - a) *Structural geometry of the platform*
 - b) *Location and environmental conditions*
 - c) *Ice properties such as thickness, velocity, and crushing strength*
 - d) *Ice–structure interaction phenomena*

PART C (5 × 10 = 50)

1. Briefly explain the structural action of a tension leg platform (TLP).
Tension leg platforms (TLPs) operate successfully in deep water. They are classified as hybrid compliant structures that are suitable for both drilling and production operations. Compliancy of the platform is restricted to the surge, sway, and yaw DOF, while the heave, roll, and pitch DOF remain stiff. This compliancy is obtained using taut-moored pre-tensioned tethers that hold the platform in position. The tethers connect the platform column to the seabed through the pile templates. The axial stiffness of the tether is kept significantly high to counteract the excessive buoyancy inherent in the design. Tension in the tethers minimizes the motion of the platform in the vertical plane, while excessive buoyancy helps the tethers to remain stiff; hence the name TLP. The TLP concept is designed in such a manner that the natural periods of the platform are either too low or too high in comparison to the operational wave periods.
2. Explain passive control devices.

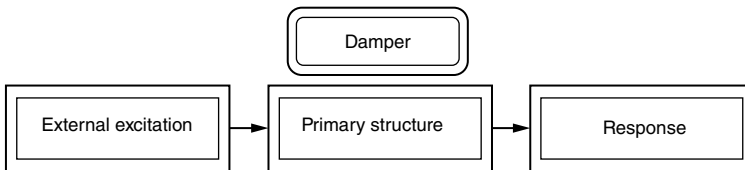

Passive systems require no external energy for successful operation, which is one of the major advantages of such systems in comparison to other types. A key benefit of passive control devices is that once installed in a structure, they do not require any startup or operation energy, unlike active and semi-active systems. Passive control devices are active at all times until maintenance, replacement, or dismantling is required.

Passive control systems include friction dampers, metallic yield dampers, and viscous fluid dampers. Alternative types of passive control systems contain a spring (or spring-like component), which is tuned to a particular natural frequency of the structure for maximum damping. Examples of these passive control devices are tuned mass dampers, tuned liquid dampers, and tuned liquid column dampers.

3. Write briefly about current.

Current generation in the sea is mainly due to the following factors:

- Wind effects
- Tidal motion
- Temperature differences
- Density gradients
- Salinity variations

The apparent wave period and the total water particle velocity are altered by the presence of currents. The current action also imposes additional drag forces on structures, which in turn affects the tether tension variation of compliant structures. Wind-generated currents are highly concentrated close to the sea surface, and the effect decreases with increased water depth. The current effect is included in the analysis by representing the current velocity, which varies linearly from the maximum value at the sea surface to zero at the seabed. The maximum current velocity of wind-generated current can be approximated as 1.0–3.0% of the sustained wind velocity. The current in the same direction as the waves increases the wavelength and the wave period. The increased wave period (10%) due to current action is called the apparent wave period.

4. Explain the major subsystems in a wind turbine.

The seven major subsystems in a wind turbine are as follows:

- Blades
- Nacelle
- Controller
- Generator
- Rotor
- Tower
- Floating body

The rotor houses a number of blades that determine the system performance of the wind turbine. A three-bladed upwind design is predominantly used in the design of the rotor, and the blade design is usually based on the pitch control. The nacelle protects the generator, controller, gearbox, and shafts. The tower

supports the wind turbine nacelle and rotor. The total height of the tower at the particular site is usually governed by the rotor diameter and the nature of the loading conditions. Generators are used to convert the raw mechanical work of the wind turbine to useful electrical output. Changes in the blade pitch angle, generator loading, and nacelle yaw are monitored by the control system. The generated electrical output is transferred to a suitable electrical grid through cables buried in the seabed. If this method is uneconomical, in recent years the generated power has been transferred through battery storage. The wind turbine elements are supported on a floating body, and mooring systems are usually employed to position restrain the system.

5. Expand the following:

FSO – Floating storage and offloading

FPSO – Floating production, storage, and offloading

FPU – Floating production unit

TLP – Tension leg platform

TLD – Tuned liquid damper

TLCD – Tuned liquid column damper

TMD – Tuned mass damper

MLAT – Multi-leg articulated tower

DVA – Dynamic vibration absorber

BLSRP – Buoyant leg storage regasification platform

Model Exam Paper 2

Maximum marks: 100

Time: 3 hours

Answer all questions.

No additional support materials are permitted.

PART A (20 × 1 = 20)

1. _____ are insensitive under lateral loads arising from wind, waves, and currents.
2. Why is recentering considered important in the design of compliant structures?
3. Articulated towers are similar to TLPs, with tethers replaced by a _____.
4. Metallic yield dampers are known to have _____ behavior.
5. When the frequency of the tank motion is closer to one of the natural frequencies of the tank fluid, _____ occurs.
6. Higher stiffness in the yaw motion of a BLSRP is due to the _____ of the buoyant legs.
7. Because the BLSRP is positive-buoyant, _____ on the tethers is necessary to ensure position restraint.
8. The wind load acting on the deck of the platform will induce additional moment, resulting in _____.
9. The maximum current velocity of the wind-generated current can be approximated as _____ of the sustained wind velocity.
10. With an increase in the severity of the sea conditions, the _____ in the surge DOF of the triceratops increases.
11. The design of offshore structures is mainly governed by these forms of ice: _____, _____, and _____.
12. When the ice force frequency becomes equal to the natural frequency of the structure, the _____ of the structural force will be high.
13. In the case of a three-legged structure like a triceratops, the maximum ice force occurs when ice acts on _____.
14. In a wind turbine, the _____ houses a number of blades that determines the system performance.
15. Current action imposes additional _____ forces on the structure.
16. A _____ is a passive type of damper that imposes response control using the principal of inertia.
17. The heave natural period is reduced by _____ the pipe wall thickness of the tethers.

18. Among the wind spectra, lower spectral energy is observed in the _____.
19. Compliant platforms are position-restrained by _____.
20. Hinged joints also serve as _____, which controls the deck motion even for a large movement/rotation of the buoyant legs.

PART B (10 × 3 = 30)

1. How do you classify offshore structures based on station-keeping characteristics?
2. Name some semi-active control devices.
3. What are the advantages of a MLAT?
4. What is the major reason for the differences in responses of buoyant legs?
5. Write the canonical form of the Mathieu equation.
6. List the wind spectra used to represent random wind for the analysis of structures.
7. Differentiate pancake ice and ice cakes.
8. Explain the formation of icebergs.
9. Differentiate limit stress and limit force failure.
10. List the disadvantages of offshore wind turbines.

PART C (5 × 10 = 50)

1. Write briefly about the spar platform.
2. Describe tuned mass dampers.
3. How is the service life of the structure calculated based on fatigue analysis?
4. How does an increase in temperature affect material properties?
5. Expand the following: *FSRU, FLNG, PM, IFFT, API, RAO, IEC, HAWT, VAWT, RNA*

Model Exam Paper 2: KEY

Maximum marks: 100

Time: 3 hours

Answer all questions.

No additional support materials are permitted.

PART A (20 × 1 = 20)

1. *Fixed platforms* are insensitive under lateral loads arising from wind, waves, and currents.

2. Why is recentering considered important in the design of compliant structures?
It is very important in the context of compliant platform design because large displacements are essentially permitted as a part of the design itself.
3. Articulated towers are similar to TLPs, with tethers replaced by a single high-buoyancy shell.
4. Metallic yield dampers are known to have stable hysteretic behavior.
5. When the frequency of the tank motion is close to one of the natural frequencies of the tank fluid, large-amplitudes sloshing occurs.
6. Higher stiffness in the yaw motion of a BLSRP is due to the symmetric layout of the buoyant legs.
7. Because the BLSRP is positive-buoyant, high initial pre-tension on the tethers is necessary to ensure position restraint.
8. The wind load acting on the deck of the platform will induce additional moment, resulting in an excessive pitch response.
9. The maximum current velocity of the wind-generated current can be approximated as 1.0–3.0% of the sustained wind velocity.
10. With the increase in the severity of the sea conditions, the mean shift in the surge DOF of the triceratops increases.
11. The design of offshore structures is mainly governed by these forms of ice: ice sheets, pack ice, and icebergs.
12. When the ice force frequency becomes equal to the natural frequency of the structure, the dynamic amplification of the structural force will be high.
13. In the case of a three-legged structure like a triceratops, the maximum ice force occurs when ice acts on two buoyant legs simultaneously.
14. In a wind turbine, the rotor houses a number of blades that determine the system's performance.
15. Current action imposes additional drag forces on the structure.
16. A tuned mass damper (TMD) is a passive type of damper that imposes response control using the principle of inertia.
17. The heave natural period is reduced by increasing the pipe wall thickness of the tethers.
18. Among the wind spectra, lower spectral energy is observed in the Davenport spectrum.
19. Compliant platforms are position-restrained by tethers.
20. Hinged joints also serve as isolators, which controls the deck motion even for a large movement/rotation of the buoyant legs.

PART B (10 × 3 = 30)

1. How do you classify offshore structures based on station-keeping characteristics?
Fixed, compliant, and floating types

2. Name some semi-active control devices.
Variable orifice fluid dampers, controllable friction devices, variable stiffness devices, controllable fluid dampers, and magneto-rheological dampers
3. What are the advantages of a MLAT?
The payload and deck areas can be increased and made comparable to conventional production platforms in moderate water depths, and the sway or horizontal displacement of the deck is considerably reduced compared to single-leg articulated towers.
4. What is the major reason for the differences in responses of buoyant legs?
Differences in the responses of buoyant legs are due to the variable submergence effect, which is one of the primary sources of nonlinearity in the excitation force.
5. Write the canonical form of the Mathieu equation.
The Mathieu equation is a special form of the Hill equation, with only one harmonic mode. The canonical form is given by:

$$\frac{d^2 f}{d\tau^2} + (\delta - q \cos(2\tau))f = 0$$

where δ and q are Mathieu parameters, which are problem-specific.

6. List the wind spectra used to represent random wind for the analysis of structures.
 - Davenport spectrum
 - Harris spectrum
 - Kaimal spectrum
 - Simiu spectrum
 - Kareem spectrum
 - American Petroleum Institute (API) spectrum
7. Differentiate pancake ice and ice cakes.
Circular ice pieces of diameter up to 3.0 m are called pancake ice, and larger pieces are called ice cakes. Pancake ice causes impact forces on offshore structures, which increase with increased wave height and current field.
8. Explain the formation of icebergs.
Icebergs form due to the flow of glaciers followed by chunks of ice breaking due to the buoyancy of water. The direction and amplitude of wind and

currents govern the velocity of the icebergs in a particular location. The temperature variation above and below the water surface causes non-uniform melting of icebergs, which results in icebergs tilting, capsizing, and breaking. Breakage of icebergs leads to the formation of smaller bergs called growlers or bergy bits.

9. Differentiate limit stress and limit force failure.
 - In the case of limit stress failure, ice sheet failure occurs at the ice–structure interface when the environmental forces acting on the ice are greater than the failure strength of the ice. The common modes of ice failure given limit stress failure conditions are buckling and crushing.
 - In the case of limit force failure, the ice failure occurs far from the ice–structure interface, and the environmental forces acting on the ice sheet lead to the formation of ice ridges.
10. List the disadvantages of offshore wind turbines.
 - Very high initial investment
 - Complications involving the construction of the foundation and supporting structure, commissioning, and decommissioning
 - Less accessibility compared to onshore wind farms, which in turn increases downtime and increases the cost of maintenance and operation
 - Complexities arising due to the extreme hydrodynamic and aerodynamic loads acting on the supporting structures and turbines

PART C (5 × 10 = 50)

1. Write briefly about the spar platform.

A spar platform is a large, deep-draft, cylindrical floating caisson, generally used for exploration and production purposes and installed at water depths of a few thousand meters. A spar has a long cylindrical shell called a hard tank, which is located near the water level. It generates high buoyancy for the structure, which helps keep the platform stable; the midsection is annulled and free flooding. The bottom part is called a soft tank and is utilized for placing the fixed ballast. It essentially floats the structure during transport and installation. In order to reduce the weight, drag, and cost of the structure, the midsection is designed to be a truss structure. To reduce the heave response, horizontal plates are introduced between the truss bays. The cell spar is the third generation of spar platforms, which was commissioned in 2004. It has a number of ring-stiffened tubes that are connected by horizontal and vertical plates. The hull is transported to the offshore site horizontally on its side.

2. Describe tuned mass dampers.

A tuned mass damper (TMD) is a passive type of damper that imposes response control using the principle of inertia. A TMD applies indirect damping to the structural system. The inertial force of the damper is equal to and opposite the excitation force for optimum control. TMDs are used for structures under lateral loads. A TMD consists of a secondary mass attached to the main structure through a spring-dashpot arrangement.

The energy of the primary structure is dissipated by inertial forces produced by the damper. The damper produces an inertial force in the direction opposite that of the structure's motion. The inertial force in the opposite direction helps reduce the motion of the primary structure. For maximum response reduction, the parameters of the TMD need to be tuned with those of the primary structure. The support system for the mass and tuning the frequency are important issues in the design of TMDs. While the mass of the damper is taken as a small fraction of the total mass of the primary structure (usually 1–5%), one of the main limitations is its sensitivity to the narrow frequency band of control. Mistuning of the TMD reduces its effectiveness considerably.

3. How is the service life of the structure calculated based on fatigue analysis?
The steps involved in the fatigue analysis of tethers are as follows:

Step 1: Dynamic response analysis of the triceratops

The dynamic response analysis of the triceratops should be carried out under the action of either environmental loads or accidental loads through experimental or numerical investigations.

Step 2: Tether tension variation

The tension variation of a tether should be obtained from the investigations carried out on the structure.

Step 3: Tether stress time history

From the known area of the tether and the tether tension variation, the tether stress variation time history is obtained.

Step 4: Stress histogram

The stress histogram should be developed from the stress time history. This stress histogram gives the stress range with the number of cycles.

Step 5: Allowable stress cycles

The allowable stress cycles should be calculated according to the standard regulations using the S-N curve approach. It is given by:

$$\log N = \log B - m \log S$$

where N is the number of allowable cycles, S is the stress range, and B and m are constants obtained from the S - N curves.

Step 6: *Fatigue damage assessment*

The fatigue damage of the tether is then calculated using the Miner-Palmgren rule given by:

$$D_f = \sum_{i=1}^m \frac{n_i}{N_i}$$

where D_f is the fatigue damage, n is the number of stress counts from the histogram, and N is the number of allowable cycles from the S - N relationship.

Step 7: *Service life calculation*

Fatigue damage is then calculated for one year. Finally, the service life of the tethers is calculated by extrapolating the fatigue damage to one tether.

4. How does an increase in temperature affect material properties?

Offshore structures, especially the topsides, are constructed with different forms of steel. With respect to the grade of steel, the stress-strain characteristics vary significantly at elevated temperatures. Increased temperatures lead to thermal strains in the material, even in the absence of mechanical loading. So, the structural elements experience thermal strain without an increase in internal stresses under higher temperatures.

With the increase in temperature, Young's modulus, stiffness, and the yield strength of the structural steel decrease, with or without the development of mechanical strains. On the other hand, the material ductility increases, showing an indication of strength development.

In the case of mild carbon steel, the effective yield strength is reduced at higher temperatures (greater than 400 oC) at 2% strain, whereas the proportional limit and modulus of elasticity decrease with temperatures over 100 oC.

5. Expand the following:

FSRU – Floating storage and regasification unit

FLNG – Floating liquefied natural gas

PM – Pierson-Moskowitz

IFFT – Inverse fast Fourier transform

API – American Petroleum Institute

RAO – Response amplitude operator

IEC – International Electro-Technical Commission

HAWT – Horizontal axis wind turbine

VAWT – Vertical axis wind turbine

RNA – Rotor nacelle assembly

Model Exam Paper 3

Maximum marks: 100

Time: 3 hours

Answer all questions.

No additional support materials are permitted.

PART A (20 × 1 = 20)

1. _____ are insensitive under lateral loads arising from wind, waves, and currents.
2. A _____ design approach is popularly used to design fixed platforms so they exhibit very low displacements under lateral loads.
3. _____ help restore dynamic equilibrium in the system under various environmental loads.
4. In a spar platform, a _____ generates high buoyancy for the structure.
5. _____, _____, and _____ are passive control devices.
6. Buoyant legs are an alternative structural form of _____ platforms.
7. _____ isolate the deck and buoyant legs in a BLSRP and provide operational comfort.
8. The stress range and the number of cycles are estimated using _____.
9. Random waves are usually described using statistical parameters such as _____ and _____.
10. The average wind velocity occurring over one hour is taken as the _____.
11. A triceratops is _____ in the translational DOF.
12. The peaks in the response spectrum usually occur at _____.
13. Ice floes freezing together results in the formation of _____ covering more than 10 km.
14. _____ controls an ice floe's impact on an offshore structure.
15. Ice failure occurs due to _____ and _____ modes at lower and higher strain rates, respectively.
16. An increase in ice velocity _____ the average crushing force.
17. The principal mechanism that causes a reduction in the strength and stability of a structure during a fire is _____.
18. Young's modulus, stiffness, and the yield strength of structural steel _____ with an increase in temperature.

19. Ring stiffeners prevent damage from spreading to the adjacent bay and act as an obstruction to _____.
20. The suitability of pontoon wind turbines is limited to _____.

PART B (10 × 3 = 30)

1. Differentiate elasticity and recentering.
2. What is a shallow TLD?
3. List the major components in the deck of a BLSRP.
4. Why are rotational responses observed in the deck of a BLSRP, despite the presence of hinged joints?
5. Explain the PM spectrum and its applicability.
6. What is the apparent wave period?
7. What are the special loads that act on offshore structures?
8. Explain the ice–structure interaction phenomenon.
9. List the ice failure modes.
10. What are the advantages of offshore wind turbines?

PART C (5 × 10 = 50)

1. Describe active control systems with a neat sketch.
2. Write briefly about a TLCD.
3. What are the advantages of a TLP with a TMD?
4. Describe the response behavior of a BLSRP under wave loads.
5. Explain the continuous ice crushing phenomenon.

Model Exam Paper 3: KEY

Maximum marks: 100

Time: 3 hours

Answer all questions.

No additional support materials are permitted.

PART A (20 × 1 = 20)

1. *Fixed platforms* are insensitive under lateral loads arising from wind, waves, and currents.
2. A *strength-based* design approach is popularly used to design fixed platforms so they exhibit very low displacements under lateral loads.
3. *Large displacements* help restore dynamic equilibrium in the system under various environmental loads.

4. In a spar platform, a hard tank generates high buoyancy for the structure.
5. Tuned mass dampers, tuned liquid dampers, and tuned liquid column dampers are passive control devices.
6. Buoyant legs are an alternative structural form of spar platforms.
7. Hinged joints isolate the deck and buoyant legs in a BLSRP and provide operational comfort.
8. The stress range and the number of cycles are estimated using the rainflow-counting method.
9. Random waves are usually described using statistical parameters such as significant wave height and zero-crossing periods.
10. The average wind velocity occurring over one hour is taken as the steady wind velocity.
11. A triceratop is monolithic in the translational DOF.
12. The peaks in the response spectrum usually occur at multiples or fractions of the natural frequency of the structure or the dominant wave frequency.
13. Ice floes freezing together results in the formation of ice fields covering more than 10 km.
14. Drift velocity controls an ice floe's impact on an offshore structure.
15. Ice failure occurs due to creep and crushing modes at lower and higher strain rates, respectively.
16. An increase in ice velocity decreases the average crushing force.
17. The principal mechanism that causes a reduction in the strength and stability of a structure during a fire is the release of potential energy.
18. Young's modulus, stiffness, and the yield strength of structural steel decrease with an increase in temperature.
19. Ring stiffeners prevent damage from spreading to the adjacent bay and act as an obstruction to circumferential bending.
20. The suitability of pontoon wind turbines is limited to calm seas.

PART B (10 × 3 = 30)

1. Differentiate elasticity and recentering.
Elasticity refers to material characteristics and ensures that a member regains its form, shape, and size upon the removal of loads, when the applied load is within the elastic limit. Recentering is an extension of this property.
Recentering refers to the capability of the structural form (not a material characteristic) to regain its initial position (which may not be an equilibrium position) in the presence of external forces (not upon their removal, unlike in elasticity).
2. What is a shallow TLD?
If the ratio of the height of the liquid column in a damper to the length of the tank (in the case of a rectangular tank) or the diameter of the circular tank is less than 0.15, then it is classified as a shallow water tuned liquid damper.

3. List the major components in the deck of a BLSRP.

The deck has utilities including a regasification unit, a gas turbine with a generator, air compressors, fuel pumps, a fire water and foam system, a fresh water system, cranes, a lubrication oil system, lifeboats, a helipad, and a LNG tank.

4. Why are rotational responses observed in the deck of a BLSRP, despite the presence of hinged joints?

The presence of rotational responses in the deck, despite the presence of hinged joints, is due to the differential heave response that occurs due to dynamic tether tension variations.

5. Explain the PM spectrum and its applicability.

The most commonly used wave spectrum in offshore design is the PM spectrum, which is applied in different regions such as the Gulf of Mexico, offshore Brazil, Western Australia, offshore Newfoundland, and Western Africa in both operational and survival conditions. This spectrum is suitable for representing open sea conditions that are neither fetch limited nor duration limited.

6. What is the apparent wave period?

Current in the same direction as waves increases the wavelength and the wave period. The increased wave period (10%) due to the current action is called the apparent wave period.

7. What are the special loads that act on offshore structures?

- *Environmental loads due to ice, earthquakes, tides, and marine growth*
- *Loads due to temperature variations and seafloor movement*
- *Accidental loads due to ship–platform collisions, dropped objects, fires, explosions, changes of intended pressure differences during drilling, and failure of mooring lines in the case of compliant structures*

8. Explain the ice–structure interaction phenomenon.

When an ice sheet hits a vertical structure under the action of wind, waves, and currents, continuous failure of the ice occurs, which results in a horizontal force on the structure. Under certain conditions, the ice–structure interaction may also result in transient vibrations due to pressure gradients developed from the continuous failure of the ice.

9. List the ice failure modes.

- *Crushing*
- *Buckling*
- *Shear*


- Radial and circumferential cracking
- Creep
- Spalling

10. What are the advantages of offshore wind turbines?

- Less intense sea turbulence
- Fewer constraints on the size of the wind turbines
- Avoidance of noise and visual disturbances due to the distance from shore

PART C (5 × 10 = 50)

1. Describe active control systems with a neat sketch.

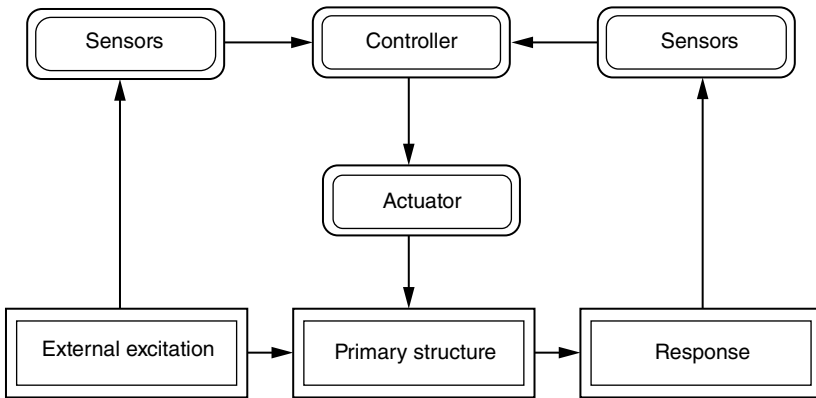


An active control system consists of three major components:

- The monitoring system can perceive the present condition of the structure and subsequently record the data using an electronic data acquisition system.
- The control system decides what reaction forces to apply to the structure based on communications received from the monitoring system.
- The actuating system applies physical forces to the structure as directed by the control system.

To accomplish all these things, an active control system needs a continuous external power source. The loss of power that might be experienced during a catastrophic event may render these systems ineffective.

Common examples of active control systems are active mass dampers and active liquid dampers.

2. Write briefly about a TLCD.

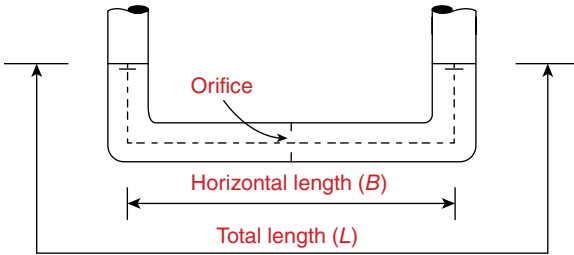

A tuned liquid column damper (TLCD) is a U-shaped tube half-filled with liquid. Unlike a TLD, which depends on liquid sloshing dampening structural vibrations, a TLCD controls structural motion by a combined action of the movement of liquid in the tube and the loss of pressure due to the orifice inside the tube.

A nozzle is placed at the horizontal part of the tube. The extent of response control achieved by a TLCD depends on the frequency of the exciting force acting on the structure.

While the restoring force is developed by the gravitational force acting on the liquid, the orifice is the controlling element for the dynamics of the liquid sloshing inside the tube. Damping depends on the opening and the type of orifice used.

3. What are the advantages of a TLP with a TMD?
- A spring-mass system with a higher mass ratio is effective for response reduction with a wide range of time periods.
 - A TMD shows better control for larger wave heights.
 - An increase in wave elevation increases the surge response at higher periods.
 - Adding a TMD to the structure shifts the surge, heave, and pitch natural periods and increases the structure's damping ratio.
 - The response reduction is found to be high for the higher mass ratios.
 - Greater heave response reduction is observed due to the reduction in the surge response and the tether tension variation.
 - By controlling the surge response, indirect control in the heave and pitch DOF is achieved.
4. Describe the response behavior of a BLSRP under wave loads.
- The deck response is significantly less than the maximum response in all active DOF. It can also be observed that the responses of the deck and buoyant legs are symmetric about the abscissa with less residue indicating high recentering capabilities. This behavior is attributed to the restraint offered by the hinged joints in both the translational and rotational DOF.

Differences in the responses of the buoyant legs are due to the variable submergence effect, which is one of the primary sources of nonlinearity in the excitation force. The presence of hinged joints at each BLS unit isolates the deck from the legs and thus improves the operational comfort and safety of the platform. The presence of rotational responses in the deck, despite the presence of hinged joints, is due to the differential heave response that occurs due to dynamic tether tension variations.

Because the buoyant legs are symmetrically spread with respect to the vertical axis of the platform, it is imperative to envisage a non-uniform phase lag in the recentering process; this causes the yaw motion of the deck. Greater stiffness in the yaw motion is due to the symmetric layout of the buoyant legs, which are spread at the bottom.

A deck response that is significantly less than that of the buoyant legs validates the use of the hinged joints; they do not transfer rotations from the legs to the deck. A lower heave response for the deck, in comparison to that of the BLS units, ensures comfortable and safe operability. The yaw response of the deck is attributed to the time delay in the recentering capability of the buoyant legs under directional wave loads.

5. Explain the continuous ice crushing phenomenon.

The major factor that limits the maximum ice force acting on any structure is the ice failure mechanism. The ice failure mechanism, in turn, depends upon ice parameters such as the ice thickness, ice velocity, width of the ice plate, and shape of the structure.

When an ice sheet interacts with a compliant structure, ice failure occurs due to ductile and brittle modes given low and high velocities, respectively. As a result, the continuous ice crushing phenomenon occurs given high ice velocity.

Ice crushing is a common ice failure mechanism of ice sheets, which results in maximum ice force on structures. It occurs when a sheet of ice hits a vertical-sided structure with moderate to high ice velocity.

During this process, horizontal cracks form on the ice sheet at the contact zone, leading to pulverization of the ice sheet. The crushed ice particles in the vicinity of the structure pile up and slide around the structure, causing the structure to vibrate.

The ice forces acting on a structure under crushing ice failure are a function of the ice strength, which depends upon the ice thickness and formation.

Continuous ice crushing during ice–structure interaction results in non-uniform, partial contact, and non-simultaneous pressure on the contact area.

The ice force–time history will have waveforms with randomly distributed wave amplitudes and periods. Thus, the ice force can be designated as a stochastic process and described using a frequency spectrum.

The uncoupled time-dependent load can be used in the dynamic analysis of structures because the transition between the different modes of failure is not completely established.

References

- Adrezin, R., Bar-Avi, P., and Benaroya, H. (1996). Dynamic response of compliant offshore structures-review. *Journal of Aerospace Engineering* 9 (4): 114–131.
- Agarwal, A.K. and Jain, A.K. (2002). Dynamic behavior of offshore spar platforms under regular sea waves. *Ocean Engineering* 30: 487–516.
- Aggarwal, N., Manikandan, R., and Saha, N. (2015). Predicting short term extreme response of spar offshore floating wind turbine. 8th International Conference on Asian and Pacific coast (APAC 2015). *Procedia Engineering* 116: 47–55.
- Amdahl, J. and Eberg, E. (1993). Ship collision with offshore structures. *Proceedings of the 2nd European Conference on Structural Dynamics (EURODYN'93)*, Trondheim, Norway (June). EASD. ISBN: 9054103361.
- American Bureau of Shipping (2014). LNG bunkering: Technical and operational advisory. Houston: American Bureau of Shipping.
- API RP WSD (2005). Recommended practice for planning, designing and constructing fixed offshore platforms-working stress design. Washington, D.C.: American Petroleum Institute.
- Balendra, T., Wang, C.M., and Cheong, H.F. (1995). Effectiveness of tuned liquid column dampers for the vibration control of towers. *Engineering Structures* 17 (9): 668–675. [https://doi.org/10.1016/0141-0296\(95\)00036-7](https://doi.org/10.1016/0141-0296(95)00036-7).
- Bar-Avi, P. (1999). Nonlinear dynamic response of a tension leg platform. *Journal of Offshore Mechanics and Arctic Engineering* 121: 219–226.
- Bar-Avi, P. and Benaroya, H. (1996). Non-linear dynamics of an articulated tower in the ocean. *Journal of Sound and Vibration* 190 (1): 77–103.
- Bhattacharyya, S.K., Sreekumar, S., and Idichandy, V.G. (2003). Coupled dynamics of sea star mini tension leg platform. *Ocean Engineering* 30: 709–737.
- Boon, M., Caswell, R.D., and Tennyson, R.C. (1971). Buckling of imperfect elliptical cylindrical shells under axial compression. *AIAA Journal* 9 (2): 250–255.

Offshore Compliant Platforms: Analysis, Design, and Experimental Studies,
First Edition. Srinivasan Chandrasekaran and R. Nagavinothini.

© 2020 John Wiley & Sons Ltd.

This Work is a co-publication between John Wiley & Sons Ltd and ASME Press.

- Booton, M., Joglekar, N., and Deb, M. (1987). The effect of tether damage on tension leg platform dynamics. *Journal of Offshore Mechanics and Arctic Engineering* 109: 186–192.
- Brown, D.T. and Mavrakos, S. (1999). Comparative study on mooring line dynamic loading. *Marine Structures* 12 (1999): 131–151.
- Buchner, B. and Bunnik, T. (2007). Extreme wave effects on deep water floating structures. Offshore Technology Conference, Houston, Texas (30 April–3 May).
- Buchner, B., Wichers, J.E.W., and de Wilde, J.J. (1999). Features of the state-of-the-art deep water offshore basin. *Proceedings of the Offshore Technology Conference*, Houston, Texas (3–6 May).
- Butterfield, S., Musial, W., Jonkman, J. et al. (2005). Engineering challenges for floating offshore wind turbines. *Proceedings of the Copenhagen Offshore Wind 2005 Conference and Expedition*, Copenhagen, Denmark (26–28 October). Golden, CO: National Renewable Energy Laboratory.
- Capanoglu, C.C., Shaver, C.B., Hirayama, H., and Sao, K. (2002). Comparison of model test results and analytical motion analyses for a buoyant leg structure. *Proceedings of the International Offshore and Polar Engineering Conference*, Kitakyushu, Japan (26–31 May). International Society of Offshore and Polar Engineers.
- CEN-EN (2019). Hot finished structural hollow sections. Part 2: Tolerances, dimensions and sectional properties. Brussels, Belgium: European Committee for Standardization (CEN).
- Chakrabarti, S.K. (1998). Physical model testing of floating offshore structures. Dynamic Positioning Conference, Houston, Texas (13–14 October).
- Chandrasekaran, S. (2014). *Advanced Theory on Offshore Plant FEED Engineering*. Republic of South Korea: Changwon National University Press. ISBN: 978-89-969792-8-9.
- Chandrasekaran, S. (2015a). *Dynamic Analysis and Design of Offshore Structures*. Springer, ISBN: 978-81-322-2276-7.
- Chandrasekaran, S. (2015b). *Advanced Marine Structures*. Florida: CRC Press. ISBN: 9781498739689.
- Chandrasekaran, S. (2016a). *Offshore Structural Engineering: Reliability and Risk Assessment*. Florida: CRC Press. ISBN: 978-149-87-6519-0.
- Chandrasekaran, S. (2016b). *Health, Safety and Environmental Management in Offshore and Petroleum Engineering*. Wiley. ISBN: 978-111-92-2184-5.
- Chandrasekaran, S. (2017). *Dynamic Analysis and Design of Ocean Structures*, 2e. Singapore: Springer. ISBN: 978-981-10-6088-5.
- Chandrasekaran, S., Chandak, N.R., and Gupta, A. (2006b). Stability analysis of TLP tethers. *Ocean Engineering* 33: 471–482. <https://doi.org/10.1016/j.oceaneng.2005.04.015>.

- Chandrasekaran, S. and Gaurav, G. (2008). Offshore triangular tension leg platform earthquake motion analysis under distinctly high sea waves. *Ships and Offshore Structures* 3 (3): 173–184. <https://doi.org/10.1080/17445300802051681>.
- Chandrasekaran, S., Gaurav, G., Serino, G., and Miranda, S. (2011). Ringing and springing response of triangular TLPs. *International Shipbuilding Progress* 58: 141–163.
- Chandrasekaran, S., Gaurav, S., and Jain, A.K. (2010). Ringing response of offshore compliant structures. *International Journal of Ocean and Climate Systems* 1 (3 & 4): 133–143.
- Chandrasekaran, S. and Jain, A.K. (2002a). Dynamic behavior of square and triangular offshore tension leg platforms under regular wave loads. *Ocean Engineering* 29 (3): 279–313. [https://doi.org/10.1016/S0029-8018\(00\)00076-7](https://doi.org/10.1016/S0029-8018(00)00076-7).
- Chandrasekaran, S. and Jain, A.K. (2002b). Triangular configuration tension leg platform behaviour under random sea wave loads. *Ocean Engineering* 29: 1895–1928.
- Chandrasekaran, S. and Jain, A.K. (2004). Aerodynamic behavior of offshore triangular tension leg platforms. *Proceedings of the ISOPE*, Toulon, France (23–28 May). International Society of Offshore and Polar Engineers.
- Chandrasekaran, S. and Jain, A.K. (2016). *Ocean Structures: Construction, Materials and Operations*. Florida: CRC Press, ISBN: 978-149-87-9742-9.
- Chandrasekaran, S., Jain, A.K., and Chandak, N.R. (2004). Influence of hydrodynamic coefficients in the response behavior of triangular TLPs in regular waves. *Ocean Engineering* 31: 2319–2342.
- Chandrasekaran, S., Jain, A.K., and Chandak, N.R. (2006a). Seismic analysis of offshore triangular tension leg platforms. *International Journal of Structural Stability and Dynamics* 6 (1): 97–120.
- Chandrasekaran, S., Jain, A.K., Gupta, A., and Srivastava, A. (2007b). Response behavior of triangular tension leg platforms under impact loading. *Ocean Engineering* 34: 45–53.
- Chandrasekaran, S., Jain, A.K., Gupta, A., and Srivastava, A. (2007b). Response behavior of triangular tension leg platforms under impact loading. *Ocean Engineering* 34: 45–53.
- Chandrasekaran, S., Jain, A.K., and Gupta, A. (2007a). Influence of wave approach angle on TLP's response. *Ocean Engineering* 34: 1322–1327. <https://doi.org/10.1016/j.oceaneng.2006.08.007>.
- Chandrasekaran, S. and Kiran, P.A. (2018). Mathieu stability of offshore triceratops under postulated failure. *Ships and Offshore structures* 13 (2): 143–148. <https://doi.org/10.1080/17445302.2017.133578>.
- Chandrasekaran, S. and Lognath, R.S. (2015). Dynamic analyses of buoyant leg storage regasification platform (BLSRP) under regular waves: experimental investigations. *Ships and Offshore Structures* 12 (2): 227–232.

- Chandrasekaran, S. and Madhuri, S. (2015). Dynamic response of offshore triceratops: numerical and experimental investigations. *Ocean Engineering* 109: 401–409.
- Chandrasekaran, S., Madhuri, S., and Jain, A.K. (2013). Aerodynamic response of offshore triceratops. *Ships and Offshore Structures* 8 (2): 123–140.
- Chandrasekaran, S. and Mayanak, S. (2017). Dynamic analyses of stiffened triceratops under regular waves: experimental investigations. *Ships and Offshore Structures* 12 (5): 697–705. <https://doi.org/10.1080/17445302.2016.1200957>.
- Chandrasekaran, S., Mayank, S., and Jain, A. (2015). Dynamic response behavior of stiffened triceratops under regular waves: Experimental investigations. *Proceedings of the 34th International Conference on Ocean, Offshore and Arctic Engineering (OMAE 2015)*, St. John's, NL, Canada (31 May–5 June). ASME.
- Chandrasekaran, S. and Nagavinothini, R. (2017). Analysis and design of offshore triceratops under ultra-deep waters. *International Journal of Civil, Environmental, Structural, Construction and Architectural Engineering* 11 (11): 1520–1528.
- Chandrasekaran, S. and Nagavinothini, R. (2018a). Dynamic analyses and preliminary design of offshore triceratops in ultra-deep waters. *International Journal of Innovative Infrastructure Solutions* 3 (1): 16. <https://doi.org/10.1007/s41062-017-0124-1>.
- Chandrasekaran, S. and Nagavinothini, R. (2018b). Tether analyses of offshore triceratops under wind, wave and current. *Marine Systems & Ocean Technology* 13: 34–42. <https://doi.org/10.1007/s40868-018-0043-9>.
- Chandrasekaran, S. and Nagavinothini, R. (2019a). Tether analyses of offshore triceratops under ice loads due to continuous crushing. *International Journal of Innovative Infrastructure Solutions* 4: 25. <https://doi.org/10.1007/s41062-019-0212-5>.
- Chandrasekaran, S. and Nagavinothini, R. (2019b). Ice-induced response of offshore triceratops. *Ocean Engineering* 180: 71–96. <https://doi.org/10.1016/j.oceaneng.2019.03.063>.
- Chandrasekaran, S. and Seeram, M. (2012). Stability studies on offshore triceratops. *Intl J of Research & Development* 1 (10): 398–404.
- Chandrasekaran, S., Sharma, A., and Srivastava, S. (2007c). Offshore triangular TLP behavior using dynamic Morison equation. *Journal of Structural Engineering* 34 (4): 291–296.
- Chandrasekaran, S., Sundaravadivelu, R., Pannerselvam, R., and Madhuri, S. (2011). Experimental investigations of offshore triceratops under regular waves. *Proceedings of the 30th International Conference on Ocean, Offshore and Arctic Engineering (OMAE 2015)*, Rotterdam, The Netherlands (19–24 June). ASME.
- Chandrasekaran, S., Thaillammai, C., and Khader, S.A. (2016). Structural health monitoring of offshore structures using wireless sensor networking under operational and environmental variability. *International Journal of Environmental, Chemical and Ecological Engineering* 10 (1): 33–39.

- Chatjigeorgiou, I.K. and Mavrakos, S.A. (2010). An analytical approach for the solution of the hydrodynamic diffraction by arrays of elliptical cylinders. *Applied Ocean Research* 32 (2): 242–251.
- Cho, S.R., Choi, S.I., and Son, S.K. (2015). Dynamic material properties of marine steels under impact loadings. *Proceedings of the 2015 World Congress on Advances in Structural Engineering and Mechanics*, Incheon, Korea. IASEM.
- Chou, F.S.F. (1980). Analytical approach to the design of a tension leg platform. *Proceedings of the Offshore Technology Conference*, Houston, Texas (5–8 May).
- ClassNK (2015). Guidelines for floating offshore facilities for LNG production, storage, offloading and regasification. Tokyo, Japan.
- Colwell, S. and Basu, B. (2009). Tuned liquid column dampers in offshore wind turbines for structural control. *Engineering Structures* 31 (2): 358–368. <https://doi.org/10.1016/j.engstruct.2008.09.00>.
- Copple, R.W. and Capanoglu, C.C. (1995). A buoyant leg structure for the development of marginal fields in deep water. *Proceedings of the 5th International Offshore and Polar Engineering Conference*, The Hague, The Netherlands (11–16 June). International Society of Offshore and Polar Engineers.
- Davenport, A.G. (1961). The application of statistical concepts to the wind loading of structures. *Proceedings Institution of Civil Engineers* 19: 449–471.
- de Boom, W.C., Pinkster, J.A., and Tan, P.S.G. (1984). Motion and tether force prediction of a TLP. *Journal of Waterway, Port, Coastal and Ocean Engineering* 110 (4): 472–486.
- Den Hartog, J.P. (1985). *Mechanical Vibrations*. NY: Dover publications Inc.
- Det Norske Veritas (2010a). Fatigue design of offshore steel structures. Recommended Practice DNV-RP-C203.
- Det Norske Veritas (2010b). Design against accidental loads. Recommended Practice DNV-RP-C204.
- Det Norske Veritas (2011). Floating liquefied gas terminal offshore technical guidance 2. Oslo, Norway.
- Do, Q.T., Muttaqie, T., Shin, H.K., and Cho, S.R. (2018). Dynamic lateral mass impact on steel stringer-stiffened cylinders. *International Journal of Impact Engineering* 116: 105–126. <https://doi.org/10.1016/j.ijimpeng.2018.02.007>.
- Donely, M.G. and Spanos, P.D. (1991). Stochastic response of a tension leg platform to viscous drift forces. *Journal of offshore Mechanics and Arctic Engineering* 113: 148–155.
- El-gamal, A.R., Essa, A., and Ismail, A. (2013). Effect of tethers tension force in the behavior of a tension leg platform subjected to hydrodynamic force. *International Journal of Civil, Structural, Construction and Architectural Engineering* 7 (12): 645–652.
- Ertas, A. and Ekwaro-Osire, S. (1991). Effect of damping and wave parameters on offshore structure under random excitation. *Nonlinear Dynamics* 2 (2): 119–136. <https://doi.org/10.1007/BF00053832>.

- Ertas, A. and Lee, J.-H. (1989). Stochastic response of tension leg platform to wave and current forces. *Journal of Energy Resources Technology* 111: 221–230.
- Farshidianfar, A., Oliazadeh, P., and Farivar, H.R. (2009). Optimal parameter's design in tuned liquid column damper. 17th Annual International Conference on Mechanical Engineering, University of Tehran, Iran.
- Finn, L.D., Maher, J.V., and Gupta, H. (2003). The cell spar and vortex induced vibrations. *Proceedings of the Offshore Technology Conference*, Houston, Texas (5–8 May).
- Fujino, Y. and Abe, M. (1993). Design formulas for tuned mass dampers based on a perturbation technique. *Earthquake Engineering and Structural Dynamics* 22 (10): 833–854. <https://doi.org/10.1002/eqe.4290221002>.
- Gao, H., Kwok, K.C.S., and Samali, B. (1997). Optimization of tuned liquid column damper. *Engineering Structures* 19 (6): 476–486. [https://doi.org/10.1016/S0141-0296\(96\)00099-5](https://doi.org/10.1016/S0141-0296(96)00099-5).
- Gasim, M.A., Kurian, V.J., Narayanan, S.P., and Kalaikumar, V. (2008). Responses of square and triangular TLPs subjected to random waves. International conference on construction and building technology, Universiti Teknologi Petronas, Malaysia (16–20 June).
- Glanville, R.S., Paulling, J.R., Halkyard, J.E., and Lehtinen, T.J. (1991). Analysis of the spar floating, drilling, production and storage structure. *Proceedings of the Offshore Technology Conference*, Houston, Texas (6–9 May).
- Graham, R.P. and Webb, R.M. (1980). Tethered buoyant platform production system. *Proceedings of the Offshore Technology Conference*, Houston, Texas (5–8 May).
- Gruben, G., Langseth, M., Fagerholt, E., and Hopperstad, O.S. (2016). Low-velocity impact on high-strength steel sheets: an experimental and numerical study. *International Journal of Impact Engineering* 88: 153–171. <https://doi.org/10.1016/j.ijimpeng.2015.10.001>.
- Halkyard J.E., Davies, R.L., and Glanville, R.S. (1991). The tension buoyant tower: A design for deep water, *Proceedings of the 3rd Annual Offshore Technology Conference*, Houston, Texas (6–9 May).
- Harding, J.E., Onoufriou, A., and Tsang, S.K. (1983). Collisions – what is the danger to offshore rigs. *Journal of Constructional Steel Research* 3 (2): 31–38. [https://doi.org/10.1016/0143-974X\(83\)90020-2](https://doi.org/10.1016/0143-974X(83)90020-2).
- Heinonen, J. and Rissanen, S. (2017). Coupled-crushing analysis of a sea ice-wind turbine interaction – feasibility study of FAST simulation software. *Ships and Offshore Structures* 12 (8): 1056–1063. <https://doi.org/10.1080/17445302.2017.1308782>.
- Hwang, J.-K., Roh, M.-I., and Lee, K.-Y. (2010). Detailed design and construction of the hull of a floating, production, storage and off-loading (FPSO) unit. *Ships and Offshore Structures* 5 (2): 93–104. <https://doi.org/10.1080/17445300903169168>.
- IEC (2005). Wind turbines – Part 1: Design requirements. 61400–1 Ed. 3.

- Infanti, S., Robinson, J., and Smith, R. (2008). Viscous dampers for high-rise buildings. 14th World Conference on Earthquake Engineering, Beijing, China (12–17 October).
- Islam, N. and Ahmad, S. (2003). Nonlinear seismic response of articulated offshore tower. *Defence Science Journal* 53 (1): 105–113.
- Jain, A.K. (1997). Nonlinear coupled response of offshore TLP to regular waves. *Ocean Engineering* 24 (7): 577–592.
- Jain A.K. and Chandrasekaran, S. (2004). Aerodynamic behavior of offshore triangular tension leg platforms. *Proceedings of the 14th International Offshore and Polar Engineering Conference*, Toulon, France (23–28 May). International Society of Offshore and Polar Engineers.
- Jayalekshmi, R., Sundaravadelu, R., and Idichandy, V.G. (2010). Dynamic analysis of deep water tension leg platforms under random waves. *Journal of Offshore Mechanics and Arctic Engineering* 132: 041605-1–041605-4.
- Jefferys, E.R. and Patel, M.H. (1982). Dynamic analysis models of tension leg platforms. *Journal of Energy Resources Technology* 104: 217–223.
- Jin, Q., Li, X., Sun, N. et al. (2007). Experimental and numerical study on tuned liquid dampers for controlling earthquake response of jacket offshore platform. *Marine Structures* 20 (4): 238–254. <https://doi.org/10.1016/j.marstruc.2007.05.002>.
- Jumppanen, P. (1984). Structural engineering in arctic regions. IABSE congress report.
- Kareem, A. and Sun, W.J. (1987). Stochastic response of structures with fluid-containing appendages. *Journal of Sound and Vibration* 119 (3): 389–408. [https://doi.org/10.1016/0022-460X\(87\)90405-6](https://doi.org/10.1016/0022-460X(87)90405-6).
- Kareem, A. (1983). Mitigation of wind induced motion of tall buildings. *Journal of Wind Engineering and Industrial Aerodynamics* 11: 273–284. [https://doi.org/10.1016/0167-6105\(83\)90106-X](https://doi.org/10.1016/0167-6105(83)90106-X).
- Kareem, A. (1990). Reduction of wind induced motion utilizing a tuned sloshing damper. *Journal of Wind Engineering and Industrial Aerodynamics* 36: 725–737. [https://doi.org/10.1016/0167-6105\(90\)90070-S](https://doi.org/10.1016/0167-6105(90)90070-S).
- Karna, T., Qu, Y., Bi, X. et al. (2007). A spectral model for forces due to ice crushing. *Journal of Offshore Mechanics and Arctic Engineering* 129 (2): 138–145. <https://doi.org/10.1115/1.2426997>.
- Karna, T., Qu, Y., and Yue, Q. (2006a). An equivalent lateral force for continuous crushing. In: *Proceedings of the 25th International Conference on Offshore Mechanics and Arctic Engineering*. ASME <https://doi.org/10.1115/OMAE2006-92648>.
- Karna, T., Qu, Y., and Yue, Q.J. (2006b). Baltic model of global ice forces on vertical structures. *Proceedings of the 18th IAHR International Symposium on Ice*.
- Karr, D.G., Troesch, A.W., and Wingate, W.C. (1993). Nonlinear dynamic response of a simple ice-structure interaction model. *Journal of Offshore Mechanics and Arctic Engineering* 115 (4): 246–252. <https://doi.org/10.1115/1.2920119>.

- Kim, C.-H., Lee, C.-H.O., and Goo, J.-S. (2007). A dynamic response analysis of tension leg platforms including hydrodynamic interaction in regular waves. *Ocean Engineering* 34: 1680–1689.
- Kim, K.J., Lee, J.H., Park, D.K. et al. (2016). An experimental and numerical study on nonlinear impact responses of steel-plated structures in an Arctic environment. *International Journal of Impact Engineering* 93: 99–115. <https://doi.org/10.1016/j.ijimpeng.2016.02.013>.
- Kobayashi, M., Shimada, K., and Fujihira, T. (1987). Study on dynamic responses of a TLP in waves. *Journal of Offshore Mechanics and Arctic Engineering* 109: 61–66.
- Koo, B.J., Kim, M.H., and Randall, R.E. (2004). Mathieu instability of a spar platform with mooring and risers. *Ocean Engineering* 31: 2175–2208.
- Kurian, V.J., Gasim, M.A., Narayan, S.P., and Kalaikumar, V. (2008). Parametric study of TLPs subjected to random waves. *Proceedings of the International Conference on Construction and Building Technology, Conference C (International conference on Structural Engineering)*, Kuala Lumpur, Malaysia, (16–20 June).
- Kurian, V.J., Idichandy, V.G., and Ganapathy, C. (1993). Hydro dynamic response of tension-leg platforms: A model. *Experimental Mechanics*: 212–217.
- Lee, C.-L., Chen, Y.-T., Chung, L.-L., and Wang, Y.-P. (2006). Optimal design theories and applications of tuned mass dampers. *Engineering Structures* 28 (1): 43–53. <https://doi.org/10.1016/j.engstruct.2005.06.023>.
- Lee, H.H., Wong, S.H., and Lee, R.S. (2006). Response mitigation on the offshore floating platform system with tuned liquid column damper. *Ocean Engineering* 33: 1118–1142. <https://doi.org/10.1016/j.oceaneng.2005.06.008>.
- Lee, H.H. and Juang, H.H. (2012). Experimental study on the vibration mitigation of offshore tension leg platform system with UWTLCD. *Smart Structures and Systems* 9 (1): 71–104.
- Leonard, J.W. and Young, R.A. (1985). Coupled response of compliant offshore platforms. *Engineering Structures* 7: 21–31.
- Liagre, P.F. and Niedzwecki, J.M. (2003). Estimating nonlinear coupled frequency-dependent parameters in offshore engineering. *Applied Ocean Research* 25: 1–19.
- Lloyd's Register (2005). Rules and regulations for the classification of mobile offshore units. London, U.K.
- Logan, B.L., Naylor, S., Munkejord, T., and Nyhgaard, C. (1996). Atlantic alliance: The next generation tension leg platform. *Proceedings of the Offshore Technology Conference*.
- Low, Y.M. (2009). Frequency domain analysis of a tension leg platform with statistical linearization of the tendon restoring forces. *Marine Structures* 22: 480–503.
- Mahilvahanan, A.C. and Selvam, R.P. (2010). Static and dynamic analysis of semi-submersible type floater for offshore wind turbine. *Proceedings of MARTEC*.

- Mahoney, A., Eicken, H., Shapiro, L., and Grenfell, T.C. (2004). Ice motion and driving forces during a spring ice shove on the Alaskan Chukchi coast. *Journal of Glaciology* 50 (169): 195–207. <https://doi.org/10.3189/172756504781830141>.
- Manco, M.R., Vaz, M.A., Cyrino, J.C., and Landesmann, A. (2013). Behavior of stiffened panels exposed to fire. *Proceedings of IV MARSTRUCT*, Espoo, Finland. ISBN 978-1-138-00045-2.
- Matha, D. (2009). Model development and loads analysis of an offshore wind turbine on a tension leg platform, with a comparison to other floating turbine concepts. Report NREL/SR-500-45891, National Renewable Energy Laboratory, USA.
- McCoy, T.J., Brown, T., and Byrne, A. (2014). Ice load project final technical report (No. DDRP0133). Seattle, WA: DNV GL. <https://doi.org/10.2172/1303304>.
- McGovern, D.J. and Bai, W. (2014). Experimental study on kinematics of sea ice floes in regular waves. *Cold Regions Science and Technology* 103: 15–30. <https://doi.org/10.1016/j.coldregions.2014.03.004>.
- Mekha, B.B., Johnson, C.P., and Roesset, J.M. (1996). Implication of tendon modeling on nonlinear response of TLP. *Journal of Structural Engineering* 122 (2): 142–149.
- Mercier R.S., Schott, W.E., Howell, C.T. et al. (1997). Mars tension leg platform - Use of scale model testing in the global design. *Proceedings of the Offshore Technology Conference*, Houston, Texas (5–8 May).
- Moharrami, M. and Tootkaboni, M. (2014). Reducing response of offshore platforms to wave loads using hydrodynamic buoyant mass dampers. *Engineering Structures* 81: 162–174. <https://doi.org/10.1016/j.engstruct.2014.09.037>.
- Montasir, O.A. and Kurian, V.J. (2011). Effect of slowly varying drift forces on the motion characteristics of truss spar platforms. *Ocean Engineering* 38: 1417–1429.
- Montasir, O.A.A., Kurian, V.J., Narayanan, S.P., and Mubarak, M.A.W. (2008). Dynamic response of spar platforms subjected to waves and current. International Conference on Construction and Building Technology, ICCBT 2008, Kuala Lumpur, Malaysia (16–20 June).
- Muren, J., Flugstad, P., Greiner, B. et al. (1996). The 3 column TLP-A cost efficient deep water production and drilling platform. *Proceedings of the Offshore Technology Conference*.
- Murray, J.J. and Mercier, R.S. (1996). Model tests on a tension leg platform using truncated tendons. In: *Proceedings of the Workshop on Model Testing of Deep Sea Offshore Structures*. IITC.
- Musial, W. and Butterfield, S. (2006). Future for offshore wind energy in the United States. *Proceedings of EnergyOcean*, Palm Beach, Florida (June 2004). Golden, CO: National Renewable Energy Laboratory.
- Musial, W., Butterfield, S., and Ram, B. (2006). Energy from offshore wind. Offshore Technology Conference.
- Nagamani, K. and Ganapathy, C. (2000). The dynamic response of a three leg articulate tower. *Ocean Engineering* 27: 1455–1471.

- Newman, J.N. (1963). The motions of spar buoy in regular waves. Report 1499, David Taylor Model Basin.
- Niedzwecki, J.M., van de Lindt, J.W., Gage, J.H., and Teigen, P.S. (2000). Design estimates of surface wave interaction with compliant deepwater platforms. *Ocean Engineering* 27: 867–888.
- Nielsen, F.G. and Bindingbø, A.U. (2000). Extreme loads in taut mooring lines and mooring line induced damping: an asymptotic approach. *Applied Ocean Research* 22 (2000): 103–118.
- Nordgren, R.P. (1987). Analysis of high frequency vibration of tension leg platforms. *Journal of Offshore Mechanics and Arctic Engineering* 109: 119–125.
- O’Kane, J.J., Troeschand, A.W., and Thiagaraja, K.P. (2002). Hull component interaction and scaling for TLP hydrodynamic coefficients. *Ocean Engineering* 29: 513–532.
- Paik, J.K., Sohn, J.M., Shin, Y.S., and Suh, Y.S. (2011). Nonlinear structural analysis of membrane-type LNG carrier cargo containment system under cargo static pressure loads at the cryogenic condition with a temperature of -163°C . *Ships and Offshore Structures* 6 (4): 311–322. <https://doi.org/10.1080/17445302.2010.530428>.
- Pall, A., Vezina, S., Proulx, P., and Pall, R. (1993). Friction-dampers for seismic control of Canadian space agency headquarters. *Earthquake Spectra* 9 (3): 547–557. <https://doi.org/10.1193/1.1585729>.
- Patel, M.H. and Lynch, E.J. (1983). Coupled dynamics of tensioned buoyant platforms and mooring tethers. *Engineering Structures* 5 (4): 2099–2308. [https://doi.org/10.1016/0141-0296\(83\)90009-3](https://doi.org/10.1016/0141-0296(83)90009-3).
- Patel, M.H. and Park, H.I. (1991). Dynamics of tension leg platform tethers at Low tension. Part I – Mathieu stability at large parameters. *Marine Structures* 4 (3): 257–273.
- Perryman, S.R., Horton, E.E., and Halkyard, J.E. (1995). Tension buoyant tower for small fields in deep waters. *Proceedings of the Offshore Technology Conference*, Houston, Texas (1–4 May).
- Ramachandran, G.K.V., Bredmose, H., Sørensen, J.N., and Jensen, J.J. (2014). Fully coupled three- dimensional dynamic response of a tension-leg platform floating wind turbine in waves and wind. *Journal of Offshore Mechanics and Arctic Engineering* 136: 020901–020901.
- Ran, Z., Kim, M.H., Niedzwecki, J.M., and Johnson, R.P. (1996). Response of a spar platform in random waves and currents (experiments vs. theory). *International Journal of Offshore Polar Engineering* 6 (1).
- Rana, R. and Soong, T.T. (1998). Parametric study and simplified design of tuned mass dampers. *Engineering Structures* 20 (3): 193–204. [https://doi.org/10.1016/S0141-0296\(97\)00078-3](https://doi.org/10.1016/S0141-0296(97)00078-3).
- Ranjani, R. (2015). Response control of tension leg platform using tuned mass damper. PhD thesis. IIT Madras, India.

- Reddy, D.V. and Swamidas, A.S.J. (2016). *Essentials of Offshore Structures: Framed and Gravity Platforms*. CRC press ISBN: 9781482220186.
- Rho, J.B., Choi, H.S., Lee, W.C. et al. (2002). Heave and pitch motion of a spar platform with damping plate. *Proceedings of the 12th International Offshore and Polar Engineering Conference*, Kitakyushu. International Society of Offshore and Polar Engineers.
- Rho, J.B., Choi, H.S., Lee, W.C. et al. (2003). An experimental study for mooring effects on the stability of spar platform. *Proceedings of the 13th International Offshore and Polar Engineering Conference*, Honolulu, Hawaii. International Society of Offshore and Polar Engineers.
- Rivera, M.R.M., Vaz, M.A., Cyrino, J.C.R., and Landesmann, A. (2014). Analysis of oil tanker deck under hydrocarbon fire. *International Journal of Modeling and Simulation for the Petroleum Industry* 8 (2): 17–24.
- Roitman, N., Andrade, R.F.M., and Batista, R.C. (1992). Dynamic response analysis of small scale model tension leg platform. *Marine Structures* 5: 491–513.
- Sadek, F., Mohraz, B., and Lew, H.S. (1998). Single and multiple tuned liquid column dampers for seismic applications. *Earthquake Engineering and Structural Dynamics* 27: 439–463.
- Schwartz, M.L. (2005). *Encyclopaedia of Coastal Science*. Netherlands: Springer.
- Sellers, L.L. and Niedzwecki, J.M. (1992). Response characteristics of multi-articulated offshore towers. *Ocean Engineering* 19 (1): 1–20.
- Shaver, C.B., Capanoglu, C.C., and Serrahn, C.S. (2001). Buoyant leg structures: Preliminary design, constructed cost and model test results. *Proceedings of the Eleventh International Offshore and Polar Engineering Conference*, Stavanger, Norway (17–22 June). International Society of Offshore and Polar Engineers.
- Sheng, D., Huajun, L., Ming, L., and Takayama, T. (2002). Experimental study on the effectiveness of TLDs under wave loading. *Journal of Ocean University of Qingdao* 1 (1): 80–86. <https://doi.org/10.1007/s11802-002-0036-2>.
- Shih, L.Y. (1991). Analysis of ice-induced vibrations on a flexible structure. *Applied Mathematical Modelling* 15 (11–12): 632–638. [https://doi.org/10.1016/S0307-904X\(09\)81009-3](https://doi.org/10.1016/S0307-904X(09)81009-3).
- Silvestre, N. (2008). Buckling behaviour of elliptical cylindrical shells and tubes under compression. *International Journal of Solids and Structures* 45 (16): 4427–4447.
- Simiu, E. and Leigh, S.D. (1984). Turbulent wind and tension leg platform surge. *Journal of Structural Engineering* 110 (4): 785–802.
- Simos, A.N. and Pesce, C.P. (1997). Mathieu stability in the dynamics of TLP tether considering variable tension along the length. *Transactions on Built Environment* 29: 175–186.
- Sodhi, D.S. and Haehnel, R.B. (2003). Crushing ice forces on structures. *Journal of Cold Regions Engineering* 17 (4): 153–170. [https://doi.org/10.1061/\(ASCE\)0887-381X\(2003\)17:4\(153\)](https://doi.org/10.1061/(ASCE)0887-381X(2003)17:4(153)).

- Sohn, Y., Kim, S., and Yoon, I. (2012). Conceptual design of LNG FSRU topside regasification plant. *Proceedings of the 22nd International Offshore and Polar Engineering Conference*, Rhodes, Greece (17–22 June). International Society of Offshore and Polar Engineers. ISBN 978–1–880653–94–4 (set).
- Spanos, P.D. and Agarwal, V.K. (1984). Response of a simple tension leg platform model to wave forces calculated at displaced position. *Journal of Energy Resources Technology* 106 (4): 437–443.
- Stansberg, C.T., Karlsen, S.I., Ward, E.G. et al. (2004). Model testing for ultra-deep waters. *Proceedings of the Offshore Technology Conference*, Houston, Texas.
- Stansberg, C.T., Ormberg, H., and Oritsland, O. (2002). Challenges in deep water experiments: hybrid approach. *Journal of Offshore Mechanics and Arctic Engineering* 124: 90–96.
- Sun, L.M., Fujino, Y., and Koga, K. (1995). A model of tuned liquid damper for suppressing pitching motions of structures. *Earthquake Engineering and Structural Dynamics* 24 (5): 625–636. <https://doi.org/10.1002/eqe.4290240502>.
- Sun, S. and Shen, H.H. (2012). Simulation of pancake ice load on a circular cylinder in a wave and current field. *Cold Regions Science and Technology* 78: 31–39. <https://doi.org/10.1016/j.coldregions.2012.02.003>.
- Syngellakis, S. and Balaji, R. (1989). Tension leg platform response to impact forces. *Marine Structures* 2 (2): 151–171. [https://doi.org/10.1016/0951-8339\(89\)90010-5](https://doi.org/10.1016/0951-8339(89)90010-5).
- Tabeshpour, M.R., Golafshani, A.A., and Seif, M.S. (2006). Comprehensive study on the results of tension leg platform responses in random sea. *Journal of Zhejiang University Science A* 7 (8): 1305–1317.
- Taflanidis, A.A., Scruggs, J.T., and Angelides, D.C. (2008). Robust design optimization of mass dampers for control of tension leg platforms. *Proceedings of the Eighteenth International Offshore and Polar Engineering Conference*, Vancouver, BC, Canada (6–11 July). International Society of Offshore and Polar Engineers.
- Taflanidis, A.A., Angelides, D.C., and Scruggs, J.T. (2009). Simulation-based robust design of mass dampers for response mitigation of tension leg platforms. *Engineering Structures* 31 (4): 847–857. <https://doi.org/10.1016/j.engstruct.2008.11.014>.
- Tait, M.J., Isyumov, N., and El Damatty, A. (2008). Performance of tuned liquid dampers. *Journal of Engineering Mechanics* 134 (5): 417–427. [https://doi.org/10.1061/\(ASCE\)0733-9399\(2008\)134:5\(417\)](https://doi.org/10.1061/(ASCE)0733-9399(2008)134:5(417)).
- Thiagarajan, K.P. and Troesch, A.W. (1998). Effects of appendages and small currents on the hydro dynamic heave damping of TLP columns. *Journal of Offshore Mechanics and Arctic Engineering* 120: 37–42.
- Tigli, O.F. (2012). Optimum vibration absorber (tuned mass damper) design for linear damped systems subjected to random loads. *Journal of Sound and Vibration* 331 (13): 3035–3049. <https://doi.org/10.1016/j.jsv.2012.02.017>.

- Vannucci, P. (1996). Simplified optimal design of tension leg platform, structural. *Optimization* 12: 265–268.
- Vickery, P.J. (1990). Wind & wave loads on a tension leg platform: theory and experiment. *Journal of Wind Engineering and Industrial Aerodynamics* 36: 905–914.
- Viet, L.D. and Nghi, N.B. (2014). On a nonlinear single-mass two-frequency pendulum tuned mass damper to reduce horizontal vibration. *Engineering Structures* 81: 175–180. <https://doi.org/10.1016/j.engstruct.2014.09.03>.
- Wang, L. and Isberg, J. (2015). Nonlinear passive control of a wave energy converter subject to constraints in irregular waves. *Energies* 8 (7): 6528–6542. <https://doi.org/10.3390/en8076528>.
- Wang, P., Zhao, M., Du, X., and Liu, J. (2019). Analytical solution for the short-crested wave diffraction by an elliptical cylinder. *European Journal of Mechanics-B/Fluids* 74: 399–409.
- White, C.N., Copple, R.W., and Capanoglu, C. (2005). Triceratops: An effective platform for developing oil and gas fields in deep and ultra-deep water. *Proceedings of the 15th International Offshore and Polar Engineering Conference*. International Society of Offshore and Polar Engineers.
- Witz, J.A., Patel, M.H., and Harrison, J.H. (1986). On the hydrodynamics of semisubmersibles with articulated members. *Proceedings of Royal Society of London, Series A, Mathematical and Physical Sciences* 403: 81–109.
- Wong, K. (2008). Seismic energy dissipation of inelastic structures with tuned mass dampers. *Journal of Engineering Mechanics* 134 (2): 162–172. [https://doi.org/10.1061/\(ASCE\)0733-9399\(2008\)134:2\(163\)](https://doi.org/10.1061/(ASCE)0733-9399(2008)134:2(163)).
- World Meteorological Organization (2014). Sea state code. Geneva, Switzerland.
- Wu, H.-l., Chen, X.-j., Huang, Y.-x., and Wang, B. (2014). Influence of the legs underwater on the hydrodynamic response of the multi-leg floating structures. *Ships and Offshore Structures* 9 (6): 578–595.
- Wu, J.-C., Shih, M.H., Lin, Y.-Y., and Shen, Y.C. (2005). Design guidelines for tuned liquid column damper for structures responding to wind. *Engineering Structures* 27 (13): 1893–1905. <https://doi.org/10.1016/j.engstruct.2005.05.009>.
- Yan, F.-s., Da-gang, Z., Li-Ping, S., and Yang-shan, D. (2009). Stress verification of a TLP under extreme wave environment. *Journal of Marine Science Applications* 8: 132–136.
- Yashima, N. (1976). Experimental and theoretical studies of a tension leg platform in deep water. *Proceedings of the Offshore Technology Conference*, Houston, Texas (3–6 May).
- Yoneya, T. and Yoshida, K. (1982). Dynamics of tension leg platforms in waves. *Journal of Energy Resources Technology* 104: 20–28.
- Yoshida, K., Ozaki, M., and Oka, N. (1984). Structural response analysis of tension leg platforms. *Journal of Energy Resources* 106: 10–17.

- Younis, B.A., Teigen, P., and Przulj, V.P. (2001). Estimating the hydrodynamic forces on a mini TLP with computational fluid dynamics and design-code techniques. *Ocean Engineering* 28: 585–602.
- Yue, Q., Bi, X., Zhang, X., and Karna, T. (2002). Dynamic ice forces caused by crushing failure. *Proceedings of the 16th IAHR Symposium on Ice*, Dunedin, New Zealand (December).
- Yue, Q., Zhang, X., Bi, X., and Shi, Z. (2001). Measurements and analysis of ice induced steady state vibration. *Proceedings of the International Conference on Port and Ocean Engineering Under Arctic Conditions*.
- Zeng, X.-h., Shen, X.-p., and Wu, Y.-x. (2007). Governing equations and numerical solutions of tension leg platform with finite amplitude motion. *Applied Mathematics and Mechanics (English Edition)* 28 (1): 37–49.
- Zhang, F., Yang, J., Li, R., and Chen, G. (2007). Numerical investigation on the hydrodynamic performances of a new spar concept. *Science Direct Journal of Hydrodynamics* 19 (4): 473–481.
- Zhao, W.H., Yang, J.M., Hu, Z.Q., and Wei, Y.F. (2011). Recent developments on the hydrodynamics of floating liquid natural gas (FLNG). *Ocean Engineering* 38 (2011): 1555–1567.
- Zhao, W., Yang, J., and Hu, Z. (2013). Effects of sloshing on the global motion responses of FLNG. *Ships and Offshore Structures* 8 (2): 111–122. <https://doi.org/10.1080/17445302.2012.691272>.
- Ziemer, G. and Evers, K.U. (2016). Model tests with a compliant cylindrical structure to investigate ice-induced vibrations. *Journal of Offshore Mechanics and Arctic Engineering* 138 (4): 041501. <https://doi.org/10.1115/1.4033712>.

Index

a

- accelerometers 65
- active control algorithm 25
- Airy wave theory 13, 15–17, 23, 97
- American Bureau of Shipping (ABS)
 - rules 62
- apparent wave period 101
- articulated tower (AT)
 - BLSRP, 60
 - guyed towers 19–21
 - offshore compliant platforms 44–48
 - response control of 48–53

b

- ball joints 18, 21, 139, 183
- bergy bits 126
- BLSRP *see* buoyant leg storage and regasification platform (BLSRP)
- Borgman's method 21
- buckling, ice failure modes 125
- buoyant leg responses
 - characteristics of 154
 - deck and 139–140
 - with high sea conditions 120
 - of wind, waves, and current 120–121

buoyant leg storage and regasification platform (BLSRP)

- articulated towers 60
- buoyant leg structures 62–63
- critical observations 76–85
- experimental investigations 65–72
- experimental setup 64–65
- fatigue analysis of 90–93
- floating production, storage, and offloading 63–64
- numerical studies 72–73
- stability analysis of 85–90
- wave heading angle 69
- buoyant leg structure (BLS) 18, 61–63

c

- caisson effect 73
- capital expenditures (CAPEX) 2
- Chakrabarti's stretching formula 23
- collision speed 148
- collision zone location 152–153
- compliance 2
- compliant offshore structures 2, 11, 12, 19, 36–38, 60, 61, 96, 163

continuous ice crushing
 effect of ice parameters 140–145
 ice- vs. wave-induced responses
 145–147
 Korzhavin equation 135, 138
 response to ice loads 138–140
 spectrum 136–138

conventional TLP, 8

Coulomb friction 20–21

coupling effect 108

creep, ice failure modes 125

crushing, ice failure modes 125

current generation
 buoyant leg response 120–121
 deck response 116–119
 environmental loads 98–101
 tether tension variation 122

d

dampers 24
 metallic yield 27, 28

deck response
 to hydrocarbon fires 156–158
 to sea conditions 139
 of wind, waves, and current 116–119

degrees of freedom 8, 99, 139, 167

dynamic coupling motion 162

dynamic ice force model 128

dynamic vibration absorbers (DVAs) 35

e

elasticity 7–9, 132

elliptical buoyant legs
 conceptual development 179–182
 to wave action 182–184

Emil Simiu's wind velocity spectrum 15

energy-balance technique 10

environmental loads
 current generation 100–101
 random waves 97–98
 regular waves 96–97
 wind 98–100

explicit analysis solver 147

f

fast Fourier transform technique 17

fatigue damage 103, 108, 147, 151–153,
 160, 173

finite element analysis (FEM) 63

floating liquefied natural gas
 (FLNG) 63

floating offshore wind turbines
 (FOWTs) 162, 163

floating platforms 2, 13, 36, 162

floating production storage and
 offloading (FPSO) 2

floating production system (FPS) 21, 63

floating production units (FPUs) 2

floating storage and offloading (FSO) 2

floating structures 16, 21–24, 162, 165

fourth-order Runge–Kutta differential
 equation 12

FPSO *see* floating production, storage,
 and offloading (FPSO)

friction dampers 26, 27

Froude scaling 38, 62, 64, 173, 174

g

glaciers 126

growlers 126

Gumbel method 24

guyed towers, AT, 19–21

h

hard tank 22

Harris spectrum 30

horizontal axis wind turbine
 (HAWT) 164

hydrocarbon fires 131–134
 deck response to 156–158

hydrodynamic buoyant mass damper
 (HBMD) 37

hydrodynamic forces 11, 14, 15

i

icebergs 126

ice cakes 126

- ice crushing strength 136, 138, 143, 145, 160
- ice failure modes 127
- ice fields 126
- ice floes 126
- ice force 127–129, 134, 135, 137–140, 144
- ice force–time 135, 138
- ice loads 126–129
response to 138–140
- ice sea conditions 138
deck response to 139
normal and extreme 135, 139, 147, 160
PSD plots for 141–143
- ice sheet 126–128, 134, 135 *see also*
ice floe
- ice speeds 128, 136
- ice thickness 126, 127, 134–136, 138, 140–144, 160
- ice velocity 128, 134–136, 138, 144
- impact loads
due to ship platform collisions 129–131
impact response in Arctic region 154–155
parametric studies 151–154
- impact load–time history 149, 150
- indenter shape 131, 153–154
- indenter size 151–152
- inverse fast Fourier transform (IFFT) 98
- k**
- Kanai-Tajimi (K-T) power spectrum 18
- Keulegan–Carpenter number 14, 15
- knife-edge indenter 153
- Korzhavin equation 135, 138
- l**
- Lagrange equation 20, 31
- Lagrangian coordinates 17, 21
- linearization technique 17, 36
- linear wave theory 17, 73
- m**
- Mathieu equation 23, 85–87
- Mathieu instability 10, 23
- MATLAB, 15, 17, 23
- mean ice force 136
- mean sea level (MSL) 98, 147
- meshing 147–148, 182
- metallic yield dampers 27, 28
- Miner’s hypothesis 90
- MLAT *see* multi-legged articulated tower (MLAT)
- Morison equation 11–13, 15–19, 21–24, 36, 62, 95
- multi-legged articulated tower (MLAT)
with a TMD, 56–58
without a TMD, 53–56
- multiple degrees of freedom (MDOF) system 32
- multi-tuned mass dampers (MTMDs) 34
- n**
- Newmark-beta method 13, 14, 17, 18, 21, 23
- o**
- offset condition, of TLP, 9
- offshore triceratops 18
- p**
- pack ice 126
- pall friction damper 27
- pancake ice 126
- passive control algorithm 26–27
- Pierson–Moskowitz (PM) spectrum 24, 145
- piezoelectric accelerometers 65
- pontoon (barge) type 165
- postulated failure cases 85, 88–93
- power spectral density (PSD) 15, 35, 77–82, 111, 113, 140, 167

q

quasi-static theory 12

r

radial and circumferential cracking, ice
failure modes 125

rainflow-counting method 90

random sea conditions 97

random waves

environmental loads 97–98

response to 108–113

recentering 7

regular waves

environmental loads 96–97

response to 104–108

response amplitude operator (RAO) 14,
62, 97, 166

response control

active control algorithm 25

articulated tower (AT) of 48–53

friction dampers 27

metallic yield dampers 27

passive control algorithm 26–27

semi-active control algorithm 25–26

tuned liquid column damper
(TLCD) 30–31

tuned liquid dampers 29–30

viscous fluid dampers 27–28

return on investment (ROI)

ride-up effect 73

rotor nacelle assembly (RNA) 165

s

scaling law 173, 174

semi-active control algorithm 25–26

semi-compliant offshore structures 44

semi-submersible type 166

service life calculation 103

servo-hydraulic system 64

setdown 9

shallow-water wave theory 29, 30

shallow-water wind turbines 163

shear, ice failure 125

ship–platform collisions 160

impact loads due to 129–131

shore-fast ice 126

single degree of freedom (SDOF)
system 11, 32, 33

single-leg multi-hinged AT, 48

socket joint 18, 21

soft tank 22

spalling, ice failure modes 125

spar platforms 60

spar type 165

spring-mass system 37

STATELP, 15

stem bar 147

stiffened triceratops

preliminary design 173–175

response to wave action 175–177

wave direction effect 177–179

Stokes wave theory 16

strength-based design approach 2

stress histogram 102

stringers, number of 154

t

taut-moored tethers 8, 60–61, 72, 87,
182

TBT *see* tethered buoyant tower (TBT)

tension leg platform (TLP) 8–19, 162

BLSRP, 60

construction worldwide 20

mechanics 10

response control of 38–44

type 165

tethered buoyant tower (TBT) 62

tether fatigue analysis 101–103

tether response 140

tethers 165

tension variation 122

thermal load 158

- three-dimensional finite element analysis (3D FEA) 11
 - time-domain analysis 182
 - time-domain based potential theory 11
 - TLP *see* tension leg platform (TLP)
 - total force–time 184, 185
 - total ice force 127
 - transitional wind turbines 163
 - triceratops
 - continuous ice crushing
 - effect of ice parameters 140–145
 - ice-*vs.* wave-induced responses 145–147
 - Korzhasin equation 135, 138
 - response to ice loads 138–140
 - spectrum 136–138
 - hydrocarbon fires 131–134
 - deck response to 156–158
 - ice crushing strength 143
 - ice loads 126–129
 - response to 138–140
 - ice thickness 140–144
 - ice velocity 144
 - mass properties of 176
 - response amplitude operator (RAO) plots 166
 - response to impact loads 147–155
 - rough sea conditions 184
 - ship–platform collisions 129–131
 - stiffened
 - preliminary design 173–175
 - response to wave action 175–177
 - wave direction effect 177–179
 - wind turbines 164, 166, 167
 - free-decay response 166–169
 - operable and parked conditions 169–170
 - PSD plots 171–172
 - tether response and service life estimation 172–173
 - wave heading angles 170–171
 - TRSPAR, 23
 - tuned liquid column damper (TLCD) 27, 30–31
 - tuned liquid dampers (TLDs) 29–30, 36
 - circular and rectangular 29
 - MLAT with 56–58
 - MLAT without 53–56
 - tuned mass dampers (TMDs) 27, 31–36
- U**
- underwater tuned liquid column damper system (UWTLCD) 37
 - universal joint 19, 21, 44–46, 48, 53, 54
- V**
- vertical axis wind turbine (VAWT) 164
 - viscous fluid dampers 27–28
- W**
- wave heading angle 69, 170–171
 - waves 95
 - buoyant leg response 120–121
 - deck response 116–119
 - environmental loads 98–100
 - tether tension variation 122
 - Weibull distribution 13–14, 24
 - wind
 - buoyant leg response 120–121
 - deck response 116–119
 - environmental loads 98–100
 - tether tension variation 122
 - WindFloat 163
 - wind loads 62
 - wind power 163
 - wind turbines 161–162
 - elliptical buoyant legs
 - conceptual development 179–182
 - to wave action 182–184
 - evolution of 163–164
 - stiffened triceratops

- wind turbines (*cont'd*)
 - preliminary design 173–175
 - response to wave action 175–177
 - wave direction effect 177–179
- support systems for
 - pontoon (barge) type 165
 - semi-submersible type 166
 - spar type 165
 - TLP type 165
- triceratops 164, 166
 - free-decay response 166–169
 - operable and parked
 - conditions 169–170
 - PSD plots 171–172
 - tether response and service life
 - estimation 172–173
 - wave heading angles
 - 170–171