

Prediction of maximum scour depth around piers with debris accumulation using EPR, MT, and GEP models

Mohammad Najafzadeh, Mohammad Rezaie Balf and Esmat Rashedi

ABSTRACT

Pier scour phenomena in the presence of debris accumulation have attracted the attention of engineers to present a precise prediction of the local scour depth. Most experimental studies of pier scour depth with debris accumulation have been performed to find an accurate formula to predict the local scour depth. However, an empirical equation with appropriate capacity of validation is not available to evaluate the local scour depth. In this way, gene-expression programming (GEP), evolutionary polynomial regression (EPR), and model tree (MT) based formulations are used to develop to predict the scour depth around bridge piers with debris effects. Laboratory data sets utilized to perform models are collected from different literature. Effective parameters on the local scour depth include geometric characterizations of bridge piers and debris, physical properties of bed sediment, and approaching flow characteristics. The efficiency of the training stages for the GEP, MT, and EPR models are investigated. Performances of the testing results for these models are compared with the traditional approaches based on regression methods. The uncertainty prediction of the MT was quantified and compared with those of existing models. Also, sensitivity analysis was performed to assign effective parameters on the scour depth prediction.

Key words | bridge piers, debris accumulation, evolutionary polynomial regression, gene-expression programming, model tree, scour depth

Mohammad Najafzadeh (corresponding author)
Mohammad Rezaie Balf
Esmat Rashedi
Department of Civil Engineering,
Graduate University of Advanced Technology-
Kerman,
P.O. Box 76315-116,
Kerman,
Iran
E-mail: moha.najafzadeh@gmail.com

INTRODUCTION

Debris, commonly consisting primarily of roofing materials such as tree trunks and limbs, occasionally accumulates around bridge piers during flood events. Hence, debris accumulations can obstruct, constrict, or redirect flow through bridge openings producing flooding, damaging loads, or accelerating scour phenomena at bridge piers. The occurrence of debris during a severe flood can cause irreparable economic damage and disturbance to the community. The dimensions and geometric shape of debris accumulations vary widely, ranging from a small cluster of debris around a bridge pier to a near complete blockage of a bridge waterway opening. The geometry of debris accumulation is dependent on the characteristics of flow condition around bridge piers, geometry of bridges and channels. The effects of debris accumulation on the scour process

can vary from minor flow constrictions to severe flow contraction resulting in significant bridge scour (Laursen & Toch 1956; Melville & Dongol 1992; Pagliara & Carnacina 2010, 2011a, 2011b). In spite of extensive investigations of local scour at bridge piers, previous studies of the effects of debris accumulation on the scouring process have not been fully understood. Therefore, local scour around piers with debris is considered one of the most attractive issues among several research subjects.

In recent decades, a large number of experimental and field studies have been conducted to investigate the impact of debris on the sediment scour phenomena (Laursen & Toch 1956; Melville & Dongol 1992; Braudrick *et al.* 1997; Diehl 1997; Bradley *et al.* 2005; Zevenbergen *et al.* 2006; Pagliara & Carnacina 2010, 2011a, 2011b).

From these studies, a general equation including governing parameter based reported experimental observations is not available to predict the scour depth around piers with debris accumulations. Occasionally, laboratory investigations have dealt with the length of time and costs related to the provision of instrumentation tools and experimental equipment in comparison with computational approaches. Artificial intelligence (AI) approaches and numerical models were extensively applied to evaluate the type of environmental issues (Wu *et al.* 2009; Chau & Wu 2010; Jozsa *et al.* 2014; Miao *et al.* 2014; Xu *et al.* 2014; Zhang *et al.* 2014; Zahmatkesh *et al.* 2014a, 2014b, 2015; Chen *et al.* 2015; Gholami *et al.* 2015; Taormina & Chau 2015). In the case of application of the AI approaches into scour depth prediction in different conditions of flow, bed sediments, and geometry of structures, artificial neural networks (ANNs), adaptive neuro-fuzzy inference systems, support vector machine, and group method of data handling (GMDH) have been employed (Kambekar & Deo 2003; Bateni & Jeng 2007a, 2007b; Etemad-Shahidi *et al.* 2011; Ghanzafari-Hashemi *et al.* 2011; Ismail *et al.* 2013; Najafzadeh *et al.* 2014; Najafzadeh 2015). The use of AI models to characterize governing parameters on scour depth provided a precise performance compared with regression models. Besides, scour depth around bridge piers with debris accumulations has not yet been predicted using AI models.

Many AI approaches based driven models, such as evolutionary polynomial regression (EPR), gene-expression programming (GEP), and model tree (MT) models can obtain a robust equation to predict scour depth around piers with perfect physical insight of problems. These models were used to find solutions for various problems in different areas of the civil engineering field, such as: prediction of rainfall-runoff (Singh *et al.* 2009; Shiri & Kisi 2011; Kashid & Maity 2012; Wang *et al.* 2015); evaluation of reference evapotranspiration (Güven *et al.* 2008; El-Baroudy *et al.* 2010; Lopez *et al.* 2011; Rahimikhoob 2014; Shiri *et al.* 2014); estimation of longitudinal dispersion coefficient in rivers (Etemad-shahidi & Taghipour 2012; Sattar & Gharabaghi 2015); prediction of friction factor in pipes (Giustolisi & Savic 2006); characterization of fluid dynamics (Giustolisi *et al.* 2007); analysis of soil behavior under different load conditions (Rezania *et al.* 2010); analysis of earthquake-induced soil liquefaction and lateral displacement (Rezania *et al.* 2011); prediction of permeability and

compaction of soils (Ahangar-Asr *et al.* 2011); and evaluation of stress-strain data buried in non-homogenous structural tests (Faramarzi *et al.* 2014).

In the case of scour depth evaluation around piers, several investigations were found to predict local scour depth around piers using the GEP approach, such as prediction of the scour depth around piers using field data sets (Azamathulla *et al.* 2010) and scour depth around vertical piers under regular waves (Güven *et al.* 2012). The MT approach was applied to predict the local scour depth around group piers under waves and currents (Etemad-Shahidi & Ghaemi 2011; Ghaemi *et al.* 2013). In the case of EPR application, Laucelli & Giustolisi (2011) employed the EPR model to predict the local scour depth downstream of grade-control structures. Outperformance of the EPR approach indicated better predictions compared to the traditional models. This technique has not been utilized yet to predict the scour depth around bridge piers.

According to the above examples, it can be noted that there are no contributions regarding pier scour phenomena with debris accumulations. In this way, in the present study, to obtain generalized equation based input-output variables for pier scour depth with debris, MT, GEP, and EPR models are developed. Performance results for the proposed model based formulations are compared with the regression models.

SCOUR AROUND PIERS WITH DEBRIS ACCUMULATION: A REVIEW

Occasionally, flow contraction due to debris accumulation can lead to an increase in bridge failure probability by accelerating the scour phenomena and extension in scour hole geometry. Several experimental and field studies have concentrated on the effects of debris accumulation on bridge pier scour (Diehl 1997; Pagliara & Carnacina 2011a). Earlier laboratory investigations in connection with debris accumulation problems and their influence on bridge scour were carried out by Laursen & Toch (1956). They performed experiments to study the effects of debris accumulation and observed that the presence of debris caused scour holes both deeper and larger in extent than those formed around a single pier.

Melville & Dongol (1992) proposed a method to determine the effective diameters to be applied in prediction of scour depth with debris accumulation. Meantime, Diehl (1997) found that one of the most important factors in bridge failures in the USA was debris accumulation. Bradley *et al.* (2005) studied the effect of debris impact on scour and erosion around hydraulic structures. Briaud *et al.* (2006) performed field studies on the accumulation with various shapes and sizes of bridge piers. Zevenbergen *et al.* (2006) investigated the effects of debris accumulation with inverted cone and conical shapes on bridge pier scour depth. Through their studies, comprehensive experimental data sets were reported by the National Cooperative Highway Research Program. Finally, they proposed several guidelines to evaluate local scour depth in the presence of debris for various debris sizes and flow characterizations.

Lagasse *et al.* (2010a, 2010b) carried out extensive experiments to discover the impact of debris on bridge pier scour. They utilized different debris with conical, square, rectangular, and triangular shapes for the tests. Their reported laboratory studies indicated that the roughness and porosity of debris do not have a significantly important effect on the pattern of scour process.

Pagliara & Carnacina (2010) conducted an experimental investigation to study the effects of roughness and porosity of debris on the scouring process around bridge piers. From their research, they found that the main variable affecting the temporal scour evolution was the flow intensity and blockage ratio. Pagliara & Carnacina (2011a) carried out experimental studies in order to understand the influences of wood debris accumulation on scour around bridge piers. Laboratory investigations were conducted with different conditions of flow and three wood debris shapes: rectangular, triangular, and cylindrical. Finally, they proposed a simple equation to evaluate the scour depth in the presence of debris accumulation, which chiefly demonstrated dependency of the scour depth with flow contraction due to debris accumulation. Pagliara & Carnacina (2011b) investigated experimentally the effects of large woody debris on the scour phenomena around piers. In their study, several pier sizes, channel widths, and bed sediment sizes were used to perform tests. They compared the results of experiments with previous research findings, and also a new explicit equation was proposed to highlight the effects of the

debris accumulation on bridge pier scour in terms of relative maximum scour and pier temporal scour evolution.

Franzetti *et al.* (2011) designed a structure preventing the scouring process with debris accumulation on the Po River, Italy. They experimentally applied a plate to reduce the scour depth with some samples of debris. From their studies, it was found that performance of the proposed laboratory procedure cannot be considered as a practical approach at optimal status in the Po River due to the presence of several limitations.

Sok *et al.* (2015) performed extensive laboratory work to evaluate the effect of debris accumulated at sacrificial piles on bridge pier scour. Experiments were conducted over wide ranges of flow depths and velocities, sacrificial piles cases, debris accumulated at single pier cases, and debris accumulated at sacrificial piles cases with different geometry in terms of diameters and thickness. From their studies, it was found that the bigger diameter and thickness of debris accumulation the more deep the scour hole depth.

In the condition of single pier with debris, they concluded that local scour depth increased from 10 to 60% in comparison with isolated pier without debris. Additionally, for sacrificial piles with debris, observed data sets illustrated that local scour depth increased from 10 to 50% compared with sacrificial piles without debris.

EFFECTIVE PARAMETERS ON THE PIER SCOUR WITH DEBRIS

According to previous investigations' findings, effective parameters on scour depth in the presence of debris around bridge piers are expressed as follows (e.g., Laursen & Toch 1956; Melville & Dongol 1992; Diehl 1997; Pagliara & Carnacina 2010, 2011a, 2011b):

$$d_s = \phi(U, U_c, h, t_d, d_d, d_{50}, D, b, t) \quad (1)$$

where d_s = the maximum local scour depth; U = flow velocity; U_c = critical flow velocity; h = flow depth in the unobstructed stage; t_d = submerged debris thickness; d_d = normal to flow debris diameter; d_{50} = mean grain size; D = pier diameter; b = channel width; and t = time. To perceive the effective variables on the scour depth, a

sketch of the scour process around a bridge pier in the presence of debris accumulation is shown in Figure 1. In Figure 1, D_e is equivalent bridge pier diameter (or effective diameter in the presence of debris accumulation). Melville & Dongol (1992) proposed the following equation for prediction of D_e :

$$D_e = \frac{0.52t_d \cdot d_d + (h - 0.52t_d)D}{h} \quad (2)$$

Based on the above equation, Lagasse et al. (2009) investigated the scour depth around piers with porous and roughened debris accumulation. They proposed the following relationship for evaluation of D_e :

$$D_e = \frac{k_{d1} \cdot t_d \cdot d_d (l_d/h)^{k_{d2}} + (h - k_{d1}t_d)D}{h} \quad (3)$$

where l_d = stream-wise debris length; k_{d1} = shape factor of debris; and k_{d2} = plunging flow intensity factor. For debris with rectangular shape, $k_{d1} = 0.39$ and $k_{d2} = -0.79$. Also, for triangular-conical shape, $k_{d1} = 0.14$ and $k_{d2} = -0.17$.

In the prediction of scour depth modeling around bridge piers, the use of dimensionless variables to develop data-driven models produced better performances than those obtained using dimensional parameters (Azamathulla et al. 2010; Etemad-Shahidi & Ghaemi 2011; Laucelli & Giustolisi 2011; Guven et al. 2012; Ghaemi et al. 2013; Najafzadeh 2015).

In this way, using Buckingham's theorem, seven independent non-dimensional parameters were obtained as

follows:

$$\frac{d_s}{D} = f\left(\frac{D}{d_{50}}, \frac{h}{D}, \frac{D}{b}, \frac{U}{U_c}, \frac{d_d}{b}, T^*, \Delta A\right) \quad (4)$$

where T^* and ΔA are the non-dimensional temporal factors in the presence of debris and blockage ratio due to rectangular and cylindrical debris accumulation, respectively. These parameters are computed as:

$$T^* = \frac{U \cdot h \cdot t}{A_b} \quad (5)$$

$$A_b = D \cdot h + \Delta A \quad (6)$$

$$\Delta A = \frac{[(d_d - D) \cdot t_d]}{b \cdot h} \quad (7)$$

in which A_b is the flow area blocked by debris accumulation and piers. For blockage ratio due to triangular debris accumulation, the t_d parameter in Equation (7) should be changed to $0.5t_d$.

By definition of the debris contraction factor, $K_d(T^*) = d_{s(T^*)}/d_{s-0(T^*)}$, where $d_{s(T^*)}$ is defined to occur at T^* and $d_{s-0(T^*)}$ is the maximum scour depth for experiment without debris contraction observed at the same T^* , Equation (4) can be rewritten as follows:

$$K_d(T^*) = \varphi\left(\frac{D}{d_{50}}, \frac{h}{D}, \frac{D}{b}, \frac{U}{U_c}, \frac{d_d}{b}, T^*, \Delta A\right) \quad (8)$$

Therefore, Equation (8) is applied to develop the EPR, MT, and GEP models for evaluation of scour depth around bridge piers due to debris accumulation effects. Two hundred and forty-three scour data sets in the form of input-output parameters for the models' development were collected from the experimental investigations of Melville & Dongol (1992), Lagasse et al. (2010a), Franzetti et al. (2011), Pagliara & Carnacina (2011a), and Sok et al. (2015). Table 1 presents the range of data sets. Of all data sets, about 75% (182 data sets) and 25% (61 data sets) are randomly selected to perform the training and testing stages, respectively. These data sets include four types of debris accumulations with different geometries. General

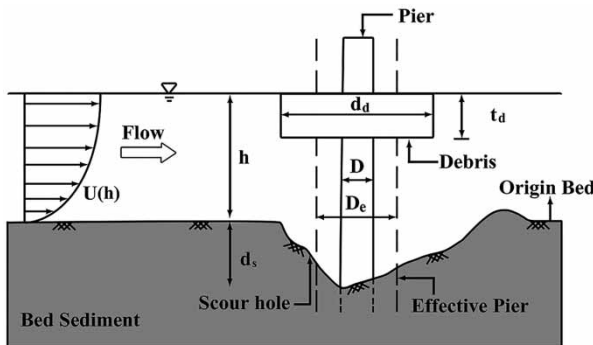


Figure 1 | Schematic diagram of scour process around bridge pier with debris accumulation.

Table 1 | Ranges of input-output parameters for the scour depth under debris prediction

Reference	T	U/U _c	ΔA	D/b	D/d50	d _f /b	h/D	k _d (T)
Melville & Dongol (1992)	407,625.88–5,195,659.4	0.952–0.965	0.00688–0.4387	0.038	35.714	0.0789–0.263	1.724–6.034	1.072–1.798
Sok et al. (2015)	6,057.1–30,780	0.52–0.744	0–0.143	0.0833–26.083	172.41	0.0833–0.3333	3.5–5	0.083–0.562
Lagasse et al. (2010a)	6,265.5–887,160.88	0.58–1.66	0.0279–0.337	0.0052–0.0425	17.857–145.71	0.01047–0.7625	2.99–24.4	0.112–11.046
Pagliara & Carnacina (2011a)	1,000–375,000,000	0.49–1	0–12.91	0.05–0.12	11.36–50	0–1	2.67–5.75	1–2.95

configurations of rectangular, triangular-conical, and circular are illustrated in Figure 2. For square debris accumulation (Figure 2(a)), it can be assumed that t_d is equal to the d_d parameter. Additionally, Table 2 indicates many empirical equations based regressive models used to evaluate the scour depth around bridge pier with debris accumulation.

FRAMEWORK OF MODELS

In this section, descriptions of the GEP, MT, and EPR modeling approaches are presented. After that, developments of proposed techniques to extract the best relationships according to Equation (8) for prediction of the scour depth around bridge pier with debris accumulation are conducted.

Development of GEP model

Recently, a new technique called GEP was developed, which is an extension of the GP approach. The GEP is a search model that evolves computer programs in the form of mathematical expressions, decision trees, and logical expressions (Ferreria 2001, 2006; Shiri & Kisi 2011; Azamathulla & Haque 2012). In addition, the GEP model has attracted the attention of investigators for prediction of characterizations in hydraulic problems. This research represents GEP models for prediction of the scour depth around ridge piers with debris accumulation. The GEP approach is coded in the form of linear chromosomes, which are then expressed in expression trees (ETs).

In fact, ETs are sophisticated computer programming which have usually evolved to solve a practical problem, and are selected according to their fitness at solving that problem. The corresponding empirical expressions can be obtained from these tree structures. A population of the ETs will discover traits, and therefore will adapt to the particular problem they are employed to solve (Ferreria 2001, 2006; Shiri & Kisi 2011; Azamathulla & Ahmad 2012; Azamathulla & Haque 2012).

Development of the GEP approach includes five steps. The first step is to select the fitness function, f_i , of an

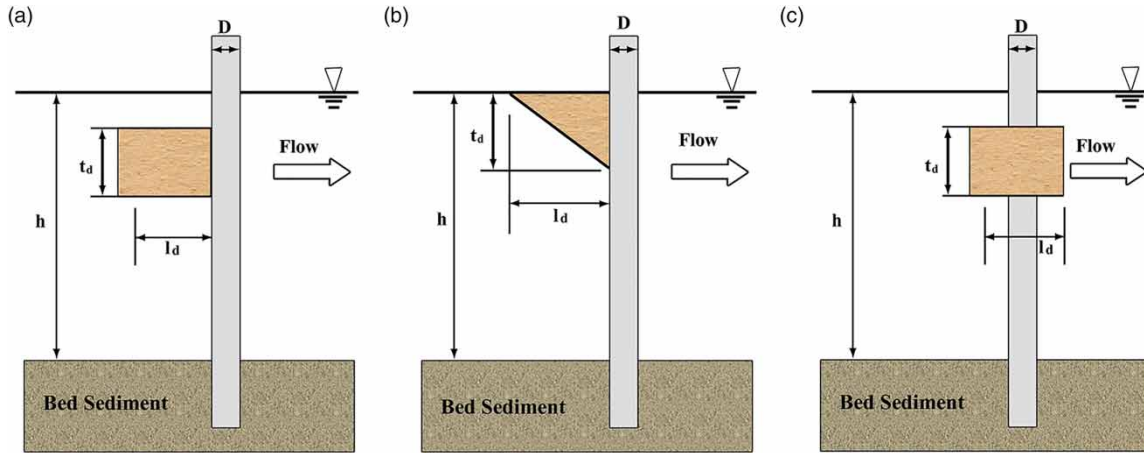


Figure 2 | Various configurations of debris accumulations used in the Melville & Dongol (1992), Pagliara & Carnacina (2011a), and Sok et al. (2015) experiments with: (a) rectangular; (b) triangular-conical; (c) circular geometries.

Table 2 | List of empirical equations for prediction of pier scour depth with debris effects

Reference	Equation	Equation no.
Pagliara & Carnacina (2011a)	$k_{d(T^*)} = 1 + 0.036\Delta A^{1.5}$	(9)
Pagliara & Carnacina (2011a)	$k_{d(T^*)} = 1 + 0.018\Delta A^{1.5}$	(10)
Pagliara & Carnacina (2011b)	$k_{d(T^*)} = \frac{1.872(h/D_e)^{0.255} \cdot D_e}{2.4D}$	(11)
Pagliara & Carnacina (2011b)	$k_{d(T^*)} = \left(\frac{D_e}{D}\right)^{0.745}$	(12)

individual program (*i*). This item is evaluated as follows:

$$f_i = \sum_{j=1}^{C_i} (M - |C_{(i,j)} - T_j|) \tag{13}$$

in which *M*, *C_(i,j)*, and *T_j* are the selection range, value returned by the individual chromosome *i* for fitness case *j*, and the largest value for fitness case *j*.

In the second stage, the set of terminals *T* and the set of function *F* were selected to generate the chromosomes. In this study, the terminal includes three independent parameters in the form of: $T(K_{d(T^*)}) = \left\{ \frac{D}{d_{50}}, \frac{h}{D}, \frac{D}{b}, \frac{U}{U_c}, \frac{d_d}{b}, T^*, \Delta A \right\}$.

To find the appropriate function set, it is necessary to peer review previous investigations of scour problems in this area. In this way, four basic operators (+, −, *, /) and basic mathematical functions (√, power, sin, cos, exp) were applied to predict the local scour depth modeling. The third step is to configure the chromosomal architecture. The fourth step is selection of linking function. Finally, for the fifth stage, the sets of genetic operators casing variation and their rates are selected. The other details related to the architecture of the GEP modeling have been expressed in the literature (Azamathulla & Ahmad 2012; Azamathulla 2012). In this study, characterizations of the local scour depth in the form of *d_s/D* are predicted using the GEP model.

Furthermore, the functional set and the operational parameters applied in the proposed GEP models are presented in Table 3. For prediction of the scour depth around bridge piers with debris accumulation, the best individual in each generation includes 30 chromosomes and fitness values of 633.68. The best formulations of the GEP model for evaluation of the local scour depth with debris accumulation, as a function of *D/d₅₀*, *h/D*, *D/b*, *U/U_c*, *d_d/b*, *T**, and ΔA are expressed as:

$$k_{d(T^*)} = \left[\left\{ \left(\frac{12.4(D/d50)}{(T^*)^2(U/U_c)} \right) \times ((-1.637(h/d) + ((D/b) + \Delta A)) \right\}^{1/3} + \left(\frac{-7.7596(D/d50)}{(D/b)^2(h/D)} \right) + \left\{ (h/D) + ((-6.5373 + \Delta A)^{1/3} (h/D)(D/b))^{1/3} \right\}^{1/3} \right] \quad (14)$$


Table 3 | Parameters of the optimized GEP model

Parameter	Description of parameter	Setting of parameter
P ₁	Function set	+, -, ×, /, exp, power
P ₂	Mutation rate	0.138
P ₃	Inversion rate	0.546
P ₄	One point and two point recombination rate, respectively (%)	0.277
P ₅	Gene recombination rate	0.277
P ₆	Gene transportation rate	0.277
P ₇	Maximum tree depth	6
P ₈	Number of gene	3
P ₉	Number of chromosomes	30

In addition, the ET of the above formulation is illustrated in Figure 3. In Figure 3, constant values illustrated in ETs are G1C3 = -1.637, G1C4 = 12.4, G2C5 = 0.749, G2C1 = 9.071, and G3C0 = -6.537, and the actual variables are d0 = T*, d2 = U/U_c, d3 = ΔA, d4 = D/b, and d5 = D/d50.

Development of MT model

Among the data mining techniques, methods are used to solve the problem by dividing it into several sub-problems (sub-domains) and the result is a combination of these sub-problems. Classification trees classify data records by sorting them down the tree from the root node to some leaf nodes. The difference between the better-known classification trees and the MT technique is that the latter have a numeric value rather than a class label in connection with the leaves. MT splits the entire input or parameter domain into sub-domains and a linear multivariable regression model is applied for each of them (Quinlan 1992; Wang & Witten

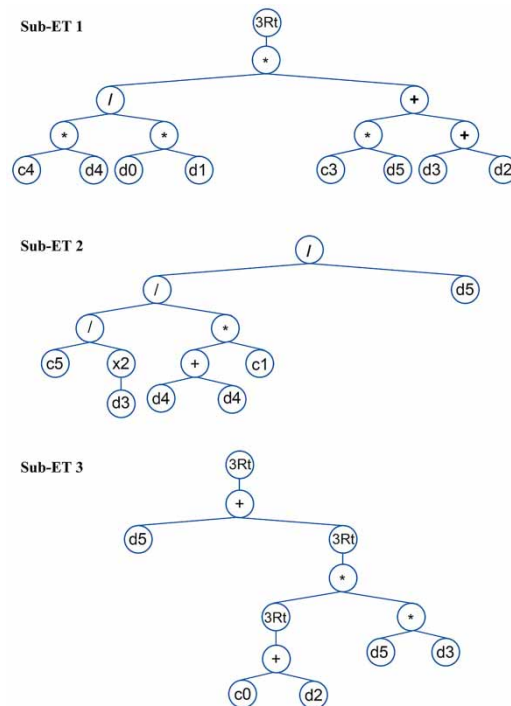**Figure 3** | Optimal ET structures for the GEP model for prediction of the scour depth around bridge pier with debris accumulation.

1997; Rahimikhoob 2014). In this way, MT models can be applied to solve continuous class problems and obtain a structural representation of the data sets using the piecewise linear models (LM) to approximate non-linear relationships. Furthermore, this algorithm is known to be one of the most effective approaches to present meaningfully physical insight of the phenomenon. The tree-building procedure within four linear regression models and knowledge extraction from the structure for corresponding sub-domains is illustrated in Figure 4(a). Furthermore, a general tree structure of the MT approach is shown in Figure 4(b). Based on the domain-splitting criterion, various approaches such as the M5 model have been frequently utilized to generalize

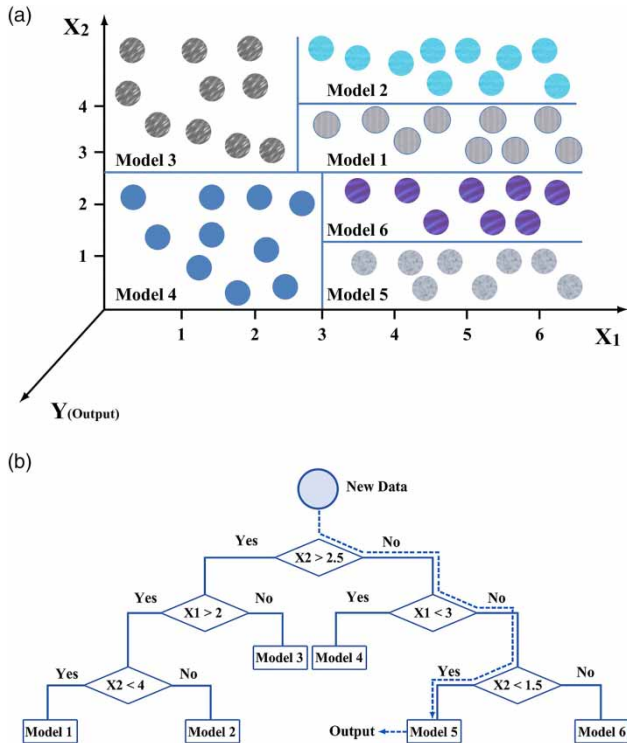


Figure 4 | Splitting the input space and prediction by the model tree for a new data record: (a) splitting of the input space ($X_1 \times X_2$) by the M5 model tree algorithm; (b) predicting a new data record by the model tree.

the MT technique (Quinlan 1992; Wang & Witten 1997). Through the MT approach, the basic tree is first generated using the splitting criterion of the standard deviation reduction (SDR) factor:

$$SDR = sd(E) - \sum_i \frac{|E_i|}{|E|} sd(E_i) \quad (15)$$

in which E , sd , and E_i are the set of examples (data records) that reach the node, the set that results from splitting the node according to the chosen attribute (parameter), and standard deviation, respectively. The M5 utilizes the sd parameter as an error measure of the class values that reach a node. Testing all parameters at a node, it calculates the expected reduction in error and then selects the parameter that maximizes SDR. This process stops when the SDR becomes less than a certain percent of the standard deviation of the original data set or when only a few data records remain (Quinlan 1992; Wang & Witten 1997). Then, a linear regression model is developed for each

sub-domain. Only the data in connection with the variables tested in that sub-domain are used in the regression. Other descriptions of the MT model have been presented in the literature (Rahimikhoob 2014).

In this study, mathematical formulations in the form of linear equations and corresponding rules for prediction of scour depth around bridge piers with debris accumulation are presented in Table 4. The proposed MT technique includes six input and one output parameters. MT technique was developed using five rules in the form of linear equations. A schematic diagram of tree-building of the MT approach in the form of rules for prediction of the scour depth around bridge piers with debris accumulation is illustrated in Figure 5. From the diagram, the splitting variable for providing Equations (16) and (17) (first and second LM) is ΔA and the corresponding value obtained is 6.93. In addition, D/b with a value of 0.008 was considered as splitting variable for production of the third and fourth LM. In Equations (16) and (17), all input parameters except T^* were taken into account in the prediction of the local scour depth with debris accumulation and also are considerably significant in developing the proposed LM. As well, h/D , D/b , ΔA , d_a/b as input variables contributed in producing Equations (18) and (19) and this indicated these parameters have more important effects in comparison with other ones. In the fifth model (Equation (20)) given by the MT approach, h/D , U/U_c , and ΔA parameters play key roles in prediction of scour depth.

Development of EPR model

EPR can be defined as a non-linear global stepwise regression that provides symbolic formulas of models. Differently from the original stepwise regression of Draper & Smith (1998), EPR is non-linear because the relationships between variables may result in non-linear functions although they are linear with respect to regression parameters. It is global since the search for optimal model structure is based on the exploration of the entire space of models by leveraging a flexible coding of the candidate mathematical expressions.

The expressions achievable by EPR are made of a number of additive terms multiplied by as many coefficients

Table 4 | General features of the proposed MT approach

Rules of MT approach	LM	LM no.	Equation no.
D/d50 ≤ 96.429 : h/D ≤ 5.892 : ΔA ≤ 6.93 : LM1	$k_{(T^*)} = +0.8195 - 0.1288 d_d/b - 0.0335 h/D + 0.0013 D/d50 + 0.9254 D/b + 0.0504 \Delta A + 0.7247 U/U_c$	(1)	(16)
ΔA > 6.93 : LM2	$k_{(T^*)} = 0.7655 - 0.5517 d_d/b + 0.022 h/D + 0.0017 D/d50 + 1.242 D/b + 0.1032 \Delta A + 0.3714 U/U_c$	(2)	(17)
h/D > 5.892 : D/b ≤ 0.008 : LM3	$k_{(T^*)} = 2.4303 + 0.1154 h/D - 74.9169 D/b + 0.0484 \Delta A + 0.1116 U/U_c$	(3)	(18)
D/b > 0.008 : LM4	$k_{(T^*)} = 1.9749 + 0.1154 h/D - 60.5098 D/b + 0.0484 \Delta A + 0.1116 U/U_c$	(4)	(19)
D/d50 > 96.429 : LM5	$k_{(T^*)} = 0.7087 - 0.1716 h/D + 0.015 \Delta A + 0.645 U/U_c$	(5)	(20)

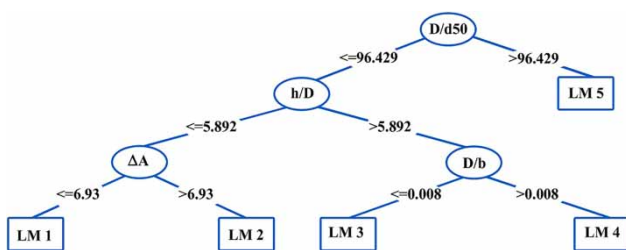


Figure 5 | Proposed MT structure for prediction of the scour depth around bridge pier with debris accumulation.

(i.e., as for polynomials) as reported in the following general expression:

$$\hat{Y} = a_0 + \sum_{j=1}^m a_j \cdot (\mathbf{X}_1)^{ES(j,1)} \cdot \dots \cdot (\mathbf{X}_k)^{ES(j,k)} \cdot f\left((\mathbf{X}_1)^{ES(j,k+1)} \cdot \dots \cdot (\mathbf{X}_k)^{ES(j,2k)}\right) \tag{21}$$

where m is the maximum number of additive terms, \mathbf{X}_i and \hat{Y} are model input and output variables, function f is chosen by

the user and exponents of variables (i.e., $ES(j,i)$) are selected from a set EX of candidates defined by the user (see Giustolisi & Savic (2006) for details).

The genetic algorithm is used to select the exponents $ES(j,i)$ from among the values in set EX . This means that an integer coding of possible alternative exponents $ES(j,i)$ is adopted to achieve non-linear relationships. It is worth noting that, if the set of exponents contains zero and $ES(j,i) = 0$, the relevant input disappears from the final expression. Thus, although simple, structures like Equation (21) are quite versatile and flexible at reproducing patterns in data.

A key point of the EPR model development strategy is that final expressions are linear with respect to coefficient a_j so that they are estimated using classical numerical regression (e.g., least squares). The parameter estimation is solved as a linear inverse problem in order to guarantee a two-ways (i.e., unique) relationship between each model structure and its parameters (Giustolisi & Savic 2006). In terms of numerical regression strategy, EPR may produce

a non-linear mapping of data (like that achievable by ANNs (Haykin 1999)) although with few constants to estimate and using linear regression for parameters' estimation. These features, in turn, help in avoiding over-fitting to training data especially when the data set is not large. Furthermore, prior assumptions on mathematical structures, functions (i.e., $f(\cdot)$) and number of parameters can be the user's initial hypotheses for the automatic model construction. More details on the EPR working sequence are reported in Giustolisi & Savic (2006) and Laucelli & Giustolisi (2011).

The most significant upgrade of the initial EPR paradigm encompasses the multi-objective optimization strategy (i.e., EPR-MOGA), where accuracy of data reproduction and parsimony of model structures are simultaneously maximized (Giustolisi & Savic 2009). Maximizing the parsimony of resulting formulas is aimed at facilitating the physical meaning of final expressions and, in turn, achieving a general description of the underlying phenomenon.

The search space in EPR-MOGA is defined by the user in terms of the base structure of mathematical expressions (e.g., as in Equation (21) and type of function f), the maximum number of additive terms m , the cardinality of set **EX** of candidate exponents, and number of candidate explanatory variables (i.e., k).

The model search is performed by using the optimized multi-objective genetic algorithm (OPTIMOGA – Laucelli & Giustolisi 2011) that is based on the Pareto dominance criterion (Pareto 1896; Van Veldhuizen & Lamont 2000) to accomplish multi-objective optimization.

EPR-MOGA explores the space of m -term formulas using two or three from the following objectives: (a) the maximization of model accuracy, (b) the minimization of the number of model coefficients (i.e., number of additive terms), and (c) the minimization of the number of actually used model inputs (i.e., whose exponent is not 0 in the resulting model structure). Note that the last two objectives represent several measures of model parsimony. The EPR-MOGA finally obtains a set of optimal solutions (i.e., the Pareto front) that can be considered as trade-off between structural complexity and accuracy (Reed et al. 2007). Advantages of the EPR-MOGA strategy can be found in Giustolisi & Savic (2006) and Savic et al. (2006) and are documented by a number of applications in different research areas.

The EPR application starts from the functional relationship in Equation (21) for predicting the local scour depth, thus D/d_{50} , h/D , D/b , U/U_c , d_d/b , T^* , and ΔA parameters were considered as candidate inputs.

The range of exponents **EX** is $[-2; -1.5; -1; -0.5; 0; 0.5; 1; 1.5; 2]$; the maximum number of polynomial terms is set to $m = 3$, without assuming a bias a_0 , and admitting only positive coefficients, i.e., $a_j > 0$. The optimization strategy made use of the following objective functions: (i) the maximization of model accuracy and (ii) the minimization of the number of actually used model inputs (i.e., whose exponent is not 0 in the resulting model structure). Different runs were performed using different options for the definition of $f(\cdot)$ in Equation (21).

Among several models returned by EPR-MOGA-XL, the following models have been selected, as trade-off between accuracy (on the training set) and parsimony:

$$\begin{aligned}
 k_{d(T^*)} = & 0.32808 \left(\frac{(\Delta A)(D/b)^{0.5}}{(d_d/b)^{0.5}} \right) \\
 & + 0.000091662 \left(\frac{(U/U_c)^{0.5}}{(D/b)^2} \right) \\
 & \times \ln \left(\frac{(T^*)^{0.5}(U/U_c)}{(\Delta A)^{0.5}(D/d_{50})^{0.5}(h/D)} \right) \\
 & + 0.11332 \left(\frac{(U/U_c)^{0.5}}{(h/D)^{0.5}} \right) \ln \left(\frac{(T^*)^{1.5}(U/U_c)^{0.5}(d_d/b)^{1.5}}{(D/d_{50})^{0.5}} \right)
 \end{aligned} \tag{22}$$

The selected model contains inputs that are recursively present in all the returned models by EPR. This allows a possible identification of the most meaningful input variables among those available (Giustolisi & Savic 2009). All calculations were performed using the software package EPR-MOGA-XL, working in the MS-Excel environment (Laucelli et al. 2012).

MEASUREMENT OF COMPUTATIONAL ERRORS FOR MODELS' EVALUATION

To compare the efficiency of the proposed models and empirical equations for training and testing stages, several statistical error indicators listing correlation coefficient (R), the root mean squared error (RMSE), the mean absolute

error (MAE), the relative absolute error (RAE), and relative squared error (RSE), are applied as follows:

$$R = \frac{\sum_{i=1}^M (O_i - \bar{O}) \cdot (P_i - \bar{P})}{\sqrt{\sum_{i=1}^M (O_i - \bar{O})^2 \sum_{i=1}^M (P_i - \bar{P})^2}} \quad (23)$$

$$RMSE = \left(\frac{\sum_{i=1}^M (P_i - O_i)^2}{M} \right)^{0.5} \quad (24)$$

$$MAE = \frac{\sum_{i=1}^M |P_i - O_i|}{M} \quad (25)$$

$$RAE = \frac{\sum_{i=1}^M |P_i - O_i|}{\sum_{i=1}^M |O_i - \bar{O}|} \quad (26)$$

$$RSE = \frac{\sum_{i=1}^M (P_i - O_i)^2}{\sum_{i=1}^M (\bar{O} - O_i)^2} \quad (27)$$

where \bar{O} is the mean of O (observed target), \bar{P} is the mean of P (predicted target), and M is the number of data sets sample.

PERFORMANCES OF THE PROPOSED MODELS AND EMPIRICAL EQUATIONS

Results of statistical error functions for both training and testing of the EPR, MT, GEP, and empirical equations are listed in Table 4. Table 4 indicates that Equation (22) given by the EPR model produced the scour depth under debris flow for the training stage with higher accuracy ($R = 0.959$) and lower prediction ($RMSE = 0.318$ and $RSE = 0.0789$) compared with MT ($R = 0.898$, $RMSE = 0.533$, and $RSE = 0.477$) and GEP ($R = 0.86$, $RMSE = 0.578$, and $RSE = 0.295$) techniques. In addition, the EPR model predicted local scour depth with lower statistical error criteria in terms of MAE (0.253) and RAE (0.405) than those using MT (MAE = 0.295 and RAE = 0.477) and GEP (MAE = 0.336 and RAE = 0.512) models. Equations (16)–(20) extracted by MT model based

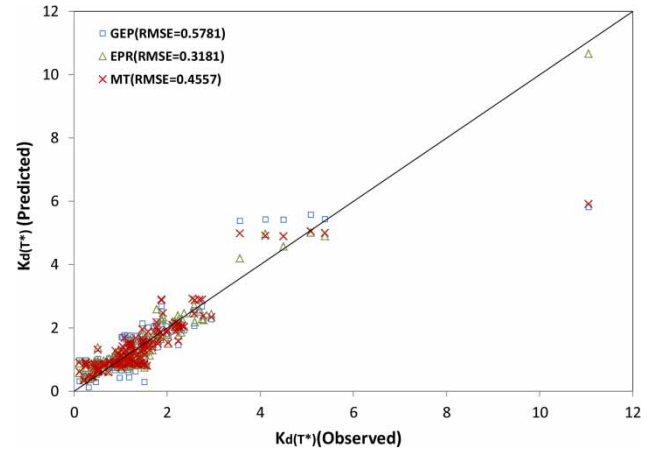


Figure 6 | Scatter plot of observed and predicted scour depth in live-bed condition for training of the proposed models.

linear equations gave a precise prediction in comparison with the GEP (Equation (22)) technique.



Figure 6 illustrates the scatter plots between the predicted and observed scour depths for the training of the EPR, MT, and GEP models. From Figure 6, for $d_s/D < 3$, all proposed models have good performances in prediction of the scour depth with debris accumulation, whereas the GEP model over-predicts for $3 < d_s/D < 6$ in comparison with the other approaches.

In the testing stage, it can be seen that coefficient correlation obtained by Equations (16)–(20) ($R = 0.944$) demonstrated relatively better prediction than those yielded by EPR ($R = 0.909$) and GEP ($R = 0.925$). Also, the MT approach provided more accurate results with $RMSE = 0.241$, $MAE = 0.178$, and $RAE = 0.089$ compared with EPR ($RMSE = 0.310$, $MAE = 0.243$, and $RAE = 0.167$) and GEP ($RMSE = 0.286$, $MAE = 0.232$, and $RAE = 0.105$) techniques. In accordance with quantitative comparisons of performances in Table 5, it can be generally said that the proposed equations given by the MT approach are the most efficient model to provide the scour depth around bridge piers with debris accumulations. The scatter plots between the predicted and observed scour depths for the testing of the proposed models are presented in Figure 7.

In this section, Equations (9) and (10) (Pagliara & Carnacina 2011a) and Equations (11) and (12) (Pagliara & Carnacina 2011b) were utilized to predict the local scour depth with debris accumulation. From Table 5, performance of empirical equations demonstrated that Equation (9) provided lower error of scour depth prediction in term of RMSE (0.513),

Table 5 | Results of performances for proposed models and empirical equations

Model	Training stage				
	R	RMSE	RSE	MAE	RAE
EPR	0.959	0.318	0.0789	0.253	0.405
MT	0.898	0.533	0.477	0.295	0.477
GEP	0.86	0.578	0.295	0.336	0.512
Model	Testing stage				
	R	RMSE	RSE	MAE	RAE
EPR	0.909	0.310	0.289	0.243	0.167
MT	0.944	0.241	0.137	0.178	0.089
GEP	0.925	0.286	0.136	0.232	0.105
Equation (9)	0.832	0.513	0.516	0.446	1.43
Equation (10)	0.832	0.554	0.602	0.489	3.12
Equation (11)	0.738	0.713	0.995	0.605	1.32
Equation (12)	0.650	0.669	0.878	0.579	1.74

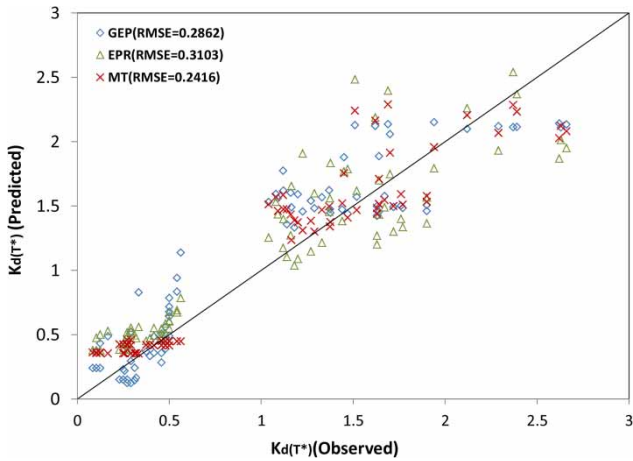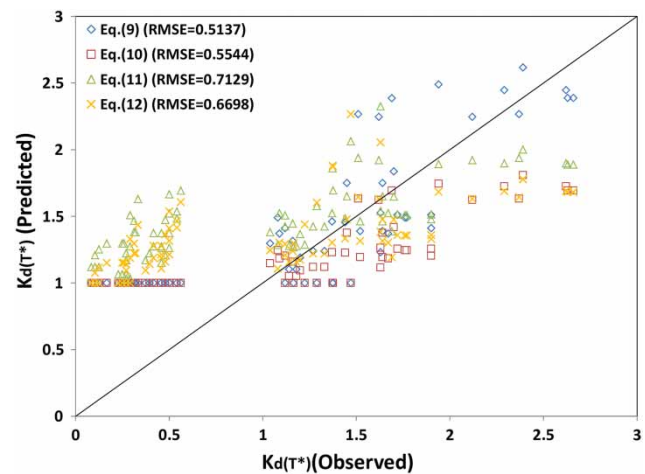**Figure 7** | Scatter plot of observed and predicted scour depth in live-bed condition for testing of the proposed models.**Figure 8** | Scatter plot of observed and predicted scour depth in live-bed condition for testing of the empirical equations.

RSE (0.516), and MAE (0.446) in comparison with Equation (10) (RMSE = 0.554, RSE = 0.602, and MAE = 0.489), Equation (11) (RMSE = 0.773, RSE = 0.995, and MAE = 0.605), and Equation (12) (RMSE = 0.669, RSE = 0.878, and MAE = 0.579). As seen in Table 5, it should be said that the R parameters given by empirical equations have not as considerable meaningful accuracy for the scour depth prediction as the proposed techniques based formulation. The scatter plots between the predicted and observed scour depths for the empirical equations are shown in Figure 8. As seen in

Figure 8, for non-dimensional scour depth lower than 1, all empirical equations indicated remarkable over-predictions. Also, Equation (10) illustrated under-prediction of the scour depth for $1 < d_s/D < 3$. Availability of effective parameters on the scour depth with debris accumulation plays a key role in obtaining an accurate performance. For instance, Equations (9) and (10) only have the function of ΔA parameter and Equations (11) and (12) include those of h/D_e and D .

In the present study, proposed empirical equations do not include properties of bed sediments. In fact, the mathematical

shapes of the proposed equations are more appropriate to give accurate scour depth predictions with debris effects than those empirical equations proposed by Pagliara & Carnacina (2011a, 2011b). In the case of practical engineering, there is no disguising the fact that lack of generalized capacity for the empirical methods corresponds to the restrictions of the governing parameters tested in a laboratory set-up and therefore not all the physical behaviors of the scour process were met precisely. Accurate performance of empirical equations depends on ranges of input and output parameters.

EXTERNAL VALIDATION OF THE PROPOSED MODELS

Tropsha et al. (2003) recommended new external validation criteria for checking models based on their performance with testing data subsets. At least one of the gradients of the regression line through the origin for the predicted versus observed values, or for the observed versus predicted values, should be close to 1 (Sattar 2014):

$$K = \sum_{i=1}^n \frac{(T_i \times P_i)}{P_i^2} \quad (28)$$

$$K' = \sum_{i=1}^n \frac{(T_i \times P_i)}{T_i^2} \quad (29)$$

Additionally, the coefficient of determination for the regression line through the origin should be less than 0.1:

$$m = \frac{(R^2 - R_0^2)}{R^2} \quad (30)$$

$$n = \frac{(R^2 - R_0^2)}{R^2} \quad (31)$$

Moreover, the condition of cross validation should satisfy:

$$R_m = R^2 \times \left(1 - \sqrt{|R^2 - R_0^2|}\right) > 0.5 \quad (32)$$

where the squared correlation coefficients through the origin between the predicted and observed values R_0^2 and between the observed and predicted values $R_0'^2$ are given as:

$$R_0^2 = \frac{1 - \sum_{i=1}^n P_i^2 (1 - K)^2}{\sum_{i=1}^n (P_i - \bar{P})^2} \quad (33)$$

$$R_0'^2 = \frac{1 - \sum_{i=1}^n T_i^2 (1 - K')^2}{\sum_{i=1}^n (T_i - \bar{T})^2} \quad (34)$$

The validation criteria and relevant performance measures of the developed models are presented in Table 6. Models will be considered valid for prediction should they satisfy some or all of the required conditions. As observed, the proposed models satisfy all of the pertained validation criteria; thus, they benefit from strong prediction power and are not random correlations.

UNCERTAINTY ANALYSIS FOR THE PROPOSED MODELS PREDICTION

In this section, a quantitative assessment of the uncertainties in the prediction of the scour depth around piers with debris accumulation is presented using the EPR, MT, and GEP models. The uncertainty analysis is employed to the data set of 432 experimental measurements used in this study, which was used to derive the proposed models. The uncertainty analysis defines the individual prediction error as $e_j = P_j - T_j$. The calculated prediction errors for the entire data set are used to calculate the mean and standard deviation of the prediction errors as $\bar{e} = \sum_{j=1}^n e_j$ and

$S_e = \sqrt{\sum_{j=1}^n (e_j - \bar{e})^2 / n - 1}$, respectively. A negative mean

Table 6 | External validation statistical measures for $K_{(T)}$ in prediction models

Model	R	K	K'	m	n	Rm
EPR	0.90	0.94	0.99	-0.16	-0.19	0.55
GEP	0.92	0.93	1.02	-0.12	-0.15	0.61
MT	0.94	0.96	0.99	-0.1	-0.11	0.64

Table 7 | Uncertainty estimate for $K_{d(T^*)}$ in models

Models	Mean prediction error	Width of uncertainty band	95% prediction error interval
EPR	+ 0.0306	± 3.1472	-0.7185 to 0.9253
GEP	+ 0.0305	± 3.0812	-4.9626 to 1.7305
MT	+ 0.0189	± 3.0282	-4.8749 to 1.3591

value demonstrates that the prediction model underestimated the observed values, and a positive value shows that the equation overestimated the observed values. Using the values of \bar{e} and S_e , a confidence band can be defined around the predicted values of an error using the Wilson score method without continuity correction (Newcombe 1998; Sattar 2014); the use of $\pm 1.96S_e$ yields an approximately 95% confidence band. The results of the uncertainty analysis, the mean prediction errors of the various models, the width of the uncertainty band, and the 95% prediction interval error are given in Table 7. The three proposed approaches have produced absolute mean prediction errors much less than those of the empirical equations. The proposed models showed approximately similar behavior, whereas empirical equations showed the opposite behavior. In the proposed models, the MT model demonstrates better behavior than the GEP and EPR models. The uncertainty band for the MT model ranged from -3.03 to +3.03. This range is smaller than that of the EPR and GEP models, which were ± 3.14 and ± 3.08 ,

respectively. Similarly, the lowest 95% confidence prediction error interval was observed for the MT model. The MT model had the lowest mean prediction error and the smallest uncertainty bands in comparison with other ones.

SENSITIVITY ANALYSIS

To assign the importance of each input variable on the scour depth, the MT model was selected to perform a sensitivity analysis. The analysis was conducted such that, one parameter of Equation (4) was eliminated each time to evaluate the effect of that input on output. Results of the analysis demonstrated that D/d_{50} ($R = 0.48$, $RMSE = 5.52$, $RSE = 22.86$, $MAE = 1.94$, and $RAE = 26.42$) is the most effective parameter on the maximum scour depth whereas d_d/b ($R = 0.95$, $RMSE = 0.21$, $RSE = 0.11$, $MAE = 0.16$, and $RAE = 0.07$) has the least influence on the $K_{d(T^*)}$ for the MT model, respectively. The other effective parameters on the $K_{d(T^*)}$ parameter include h/D , T^* , ΔA , D/b , and U/U_c which were ranked from higher to lower values, respectively. The statistical error parameters yielded from the sensitivity analysis are given in Table 8. Also, the results of sensitivity analysis indicated that D/d_{50} is the most important parameter in modeling of the maximum scour depth by the MT network. This study has proved that the MT model as an adaptive learning network can be used as a powerful soft computing tool for predicting the prediction

Table 8 | Sensitivity analysis for independent parameters

Input parameters	R	RMSE	RSE	MAE	RAE
$K_{d(T^*)} = f\left(\frac{D}{d_{50}}, \frac{h}{D}, \frac{D}{b}, \frac{U}{U_c}, \frac{d_d}{b}, T^*\right)$	0.89	0.36	0.27	0.25	0.18
$K_{d(T^*)} = f\left(\frac{D}{d_{50}}, \frac{h}{D}, \frac{D}{b}, \frac{U}{U_c}, \frac{d_d}{b}, \Delta A\right)$	0.78	0.52	19.23	0.44	2.32
$K_{d(T^*)} = f\left(\frac{D}{d_{50}}, \frac{h}{D}, \frac{D}{b}, \frac{U}{U_c}, T^*, \Delta A\right)$	0.95	0.21	0.11	0.16	0.07
$K_{d(T^*)} = f\left(\frac{D}{d_{50}}, \frac{h}{D}, \frac{D}{b}, \frac{d_d}{b}, T^*, \Delta A\right)$	0.94	0.26	0.43	0.21	0.17
$K_{d(T^*)} = f\left(\frac{D}{d_{50}}, \frac{h}{D}, \frac{U}{U_c}, \frac{d_d}{b}, T^*, \Delta A\right)$	0.93	0.25	0.24	0.20	0.12
$K_{d(T^*)} = f\left(\frac{D}{d_{50}}, \frac{D}{b}, \frac{U}{U_c}, \frac{d_d}{b}, T^*, \Delta A\right)$	0.71	0.52	0.92	0.35	0.5
$K_{d(T^*)} = f\left(\frac{h}{D}, \frac{D}{b}, \frac{U}{U_c}, \frac{d_d}{b}, T^*, \Delta A\right)$	0.48	5.52	22.86	1.94	26.42

of maximum scour depth around piers with debris accumulation as well as the other AI methods.

CONCLUSIONS

In this study, the EPR, MT, and GEP approaches were developed to evaluate the scour depth around bridge piers with debris accumulation. Performances of the proposed techniques for training and testing stages were carried out using experimental data sets collected from the literature. As well, empirical equations, as proposed by Pagliara & Carnacina (2010, 2011a, 2011b), were utilized to compare results with the proposed models. Regarding the EPR, MT, and GEP, to obtain the optimum functions on the basis of the best formulations, a dimensional analysis was used to extract parameters affecting the scour process around piers under debris flow conditions.

From the statistical error parameters presented in the training stage, it can be concluded that the EPR method predicted the local scour depth with more efficient performance compared with MT and GEP approaches. In addition, performance of the testing stages demonstrated that the MT method in the forms of linear equations and five rules captured the scour depth under debris flow conditions with more suitable accuracy (RMSE = 0.241 and MAE = 0.178) than EPR (RMSE = 0.3103 and MAE = 0.243) and GEP (RMSE = 0.286 and MAE = 0.232) techniques. In this study, one of the most interesting issues is that MT approaches provided better predictions of the scour depth with the simplest mathematical shape (Equations (16)–(20)) in comparison with EPR (Equation (22)) and GEP (Equation (14)) techniques.

Linear formulations given by the MT approach demonstrated that T^* variable has no meaningful effects on the scour depth.

Performances of empirical equations (Equations (9)–(12)) indicated that Equation (9) provided lower error of scour depth predictions in term of RMSE, RSE, and MAE than Equations (10)–(12). Meanwhile, empirical equations exhibited considerable over-prediction of the scour depth with debris accumulation.

The use of the EPR, MT, and GEP models, as explicit equations for evaluation of the scour depth, have been

proven to be more practically efficient with somewhat higher accuracy in comparison with empirical equations.

Selection criteria based on various statistical measures and on external validation measures and the output of uncertainty analyses were used to select the best MT with the highest prediction accuracy and the least uncertainty. The prediction errors and uncertainties associated with the developed MT were smaller than those associated with all of the available proposed models. D/d_{50} was found to have considerable weight in all of the selected predictive models. Finally, the robustness of the developed MT predictive model was verified by sensitivity analysis. The results of MT agreed with experimental data from previous work, producing similar variation of $K_{d(T^*)}$ with R over local scour depth without the correct impact of influencing parameters, such as D/b and U/U_c .

As seen in the present study, controlled experimental data sets used to develop the proposed approaches are an indication of the research limitation. In terms of any improvement, proposed equations can be developed by field data sets to get results with more insight and reality. Furthermore, the GMDH model would be applied so as to predict the local scour around bridge piers with debris accumulations. Also, performance of the GMDH models can be compared with the current investigation. The proposed equations based model can be of interest for use in engineering applications as contemporary formulations based on experimental data sets with a wide range of input and output variables for scour prediction around bridge piers with debris accumulation.

REFERENCES

- Ahangar-Asr, A., Faramarzi, A., Mottaghifard, N. & Javadi, A. A. 2011 Modeling of permeability and compaction characteristics of soils using evolutionary polynomial regression. *Comput. Geosci.* **37**, 1860–1869.
- Azamathulla, H. Md. 2012 Gene expression programming for prediction of scour depth downstream of sills. *J. Hydrol.* **460–461**, 156–159.
- Azamathulla, H. Md. & Ahmad, Z. 2012 Gene expression programming for transverse mixing coefficient. *J. Hydrol.* **434–435**, 142–148.
- Azamathulla, H. Md., Ghani, A. A., Zakaria, N. A. & Guven, A. 2010 Genetic programming to predict bridge pier scour. *ASCE J. Hydraul. Eng.* **136** (3), 165–169.

- Azamathulla, H. Md. & Haque, A. A. M. 2012 Prediction of scour depth at culvert outlets using gene-expression programming. *Int. J. Innovative Comput. Inform. Control* **8** (7B), 5045–5054.
- Batani, S. M. & Jeng, D. S. 2007a Estimation of pile group scour using adaptive neuro-fuzzy approach. *Ocean Eng.* **34**, 1344–1354.
- Batani, S. M. & Jeng, D. S. 2007b Neural network and neuro-fuzzy assessments for scour depth around bridge piers. *Eng. Appl. Artificial Intell.* **20**, 401–414.
- Bradley, J. B., Richards, D. L. & Bahuer, C. D. 2005 *Debris Control Structures Evaluations and Countermeasures*. 3rd edn. Hydraulic Engineering Circular 9 (HEC-9). Federal Highway Administration, Washington, DC, USA, p. 179.
- Braudrick, C. A., Grant, G., Ishikawa, E. Y. & Ikeda, H. 1997 Dynamics of wood transport in streams: a flume experiment. *Earth Surf. Process. Landforms* **22**, 669–683.
- Briaud, J. L., Chen, H. C., Chang, K. A., Chen, X. & Oh, S. J. 2006 Scour at bridges due to debris accumulation: a review. In: *Proceedings of the 3rd International Conference on Scour and Erosion (CD-ROM)*, CURNET Gouda Publisher, The Netherlands.
- Chau, K. W. & Wu, C. L. 2010 A hybrid model coupled with singular spectrum analysis for daily rainfall prediction. *J. Hydroinform.* **12** (4), 458–473.
- Chen, X. Y., Chau, K. W. & Wang, W. C. 2015 A novel hybrid neural network based on continuity equation and fuzzy pattern-recognition for downstream daily river discharge forecasting. *J. Hydroinform.* **17** (5), 733–744.
- Diehl, T. H. 1997 *Potential Drift Accumulation at Bridges*. FHWA RD-97-28, Turner-Fairbank Highway Research Center, Federal Highway Administration Research and Development, US Department of Transportation, McLean, VA, USA.
- Draper, N. R. & Smith, H. 1998 *Applied Regression Analysis*. Wiley & Sons, New York, USA.
- El-Baroudy, I., Elshorbagy, A., Carey, S. K., Giustolisi, O. & Savic, D. 2010 Comparison of three data-driven techniques in modelling the evapotranspiration process. *J. Hydroinform.* **12** (4), 365–379.
- Etemad-Shahidi, A. & Ghaemi, N. 2011 Model tree approach for prediction of pile groups scour due to waves. *Ocean Eng.* **38**, 1522–1527.
- Etemad-Shahidi, A. & Taghipour, M. 2012 Predicting longitudinal dispersion coefficient in natural streams using M5' model tree. *J. Hydraul. Eng.* **138**, 542–555.
- Etemad-Shahidi, A., Yasa, R. & Kazeminezhad, M. H. 2011 Prediction of wave-induced scour depth under submarine pipelines using machine learning approach. *Appl. Ocean Res.* **33**, 54–59.
- Faramarzi, A., Alani, A. M. & Javadi, A. A. 2014 An EPR-based self-learning approach to material modeling. *Comput. Struct.* **137**, 63–71.
- Ferreria, C. 2001 Gene-expression programming. a new adaptive algorithm for solving problems. *Complex Systems* **13** (2), 87–129.
- Ferreria, C. 2006 *Gene-expression Programming: Mathematical Modeling by an Artificial Intelligence*. Springer, Berlin, Heidelberg, New York.
- Franzetti, S., Radice, A., Rabitti, M. & Rossi, G. 2011 Hydraulic design and preliminary performance evaluation of countermeasure against debris accumulation and resulting local pier scour on River Po in Italy. *J. Hydraul. Eng.* **137**, 615–620.
- Ghaemi, N., Etemad-Shahidi, A. & Ataie-Ashtiani, B. 2013 Estimation of current-induced pile groups scour using a rule based method. *J. Hydroinform.* **15**, 516–528.
- Ghazanfari-Hashemi, S., Etemad-Shahidi, A., Kazeminezhad, M. H. & Mansoori, A. R. 2011 Prediction of pile group scour in waves using support vector machines and ANN. *J. Hydroinform.* **13**, 609–620.
- Gholami, V., Chau, K. W., Fadaee, F., Torkaman, J. & Ghaffari, A. 2015 Modeling of groundwater level fluctuations using dendrochronology in alluvial aquifers. *J. Hydrol.* **529** (3), 1060–1069.
- Giustolisi, O., Doglioni, A., Savic, D. A. & Webb, B. W. 2007 A multi-model approach to analysis of environmental phenomena. *Environ. Modell. Softw.* **5**, 674–682.
- Giustolisi, O. & Savic, D. A. 2009 Advances in data-driven analyses and modelling using EPR-MOGA. *J. Hydroinform.* **11**, 225–236.
- Giustolisi, O. & Savic, D. A. 2006 A symbolic data-driven technique based on evolutionary polynomial regression. *J. Hydroinform.* **8**, 207–222.
- Güven, A., Aytok, A., Yuçer, M. I. & Aksoy, H. 2008 Genetic programming based empirical model for daily reference evapotranspiration estimation. *Clean Soil Air Water* **36**, 905–912.
- Güven, A., Azamathulla, H. Md. & Günel, M. 2012 Predicting wave-induced scour around a circular pile. *Maritime Eng.* **165**, 31–40.
- Haykin, S. 1999 *Neural Networks: A Comprehensive Foundation*. 2nd edn. Prentice-Hall, Englewood Cliffs, NJ, USA.
- Ismail, A., Jeng, D.-S., Zhang, L. L. & Zhang, J.-S. 2013 Predictions of bridge scour: application of a feed-forward neural network with an adaptive activation function. *Eng. Appl. Artificial Intell.* **29**, 1540–1549.
- Jozsa, J., Kiely, G. & Borthwick, A. G. L. 2014 Sediment flux and its environmental implications. *J. Environ. Inform.* **24** (2), 111–120.
- Kambekar, A. R. & Deo, M. C. 2005 Estimation of pile group scour using neural networks. *Appl. Ocean Res.* **25**, 225–234.
- Kashid, S. & Maity, R. 2012 Prediction of monthly rainfall on homogeneous monsoon regions of India based on large scale circulation patterns using Genetic Programming. *J. Hydrol.* **454–455**, 26–41.
- Lagasse, P. F., Clopper, P. E. & Zevenbergen, L. W. 2009 Impacts of debris on bridge pier scour. In: *Proceedings of 33rd IAHR Congress*, IAHR, Madrid, Spain, pp. 3967–3974.
- Lagasse, P. F., Zevenbergen, L. W. & Clopper, P. E. 2010a Impacts of debris on bridge pier scour. In: *International Conference on Scour and Erosion 2010 (ICSE-5)*, 7–10 November, San Francisco, CA, USA.
- Lagasse, P. F., Clopper, P. E., Zevenbergen, L. W., Spitz, W. J. & Girard, L. G. 2010b *Effects of debris on bridge pier scour*. National Cooperative Highway Research Program (NCHRP) Report 653.

- Laucelli, D. & Giustolisi, O. 2011 Scour depth modelling by a multi-objective evolutionary paradigm. *Environ. Modell. Softw.* **26**, 498–509.
- Laucelli, D., Berardi, L., Doglioni, A. & Giustolisi, O. 2012 EPR-MOGA-XL: an Excel based paradigm to enhance transfer of research achievements on data-driven modeling. In: *Proceedings of 10th International Conference on Hydroinformatics HIC 2012*, 14–18 July, Hamburg, Germany.
- Laursen, E. M. & Toch, A. 1956 Scour around bridge piers and abutments. Iowa Highway Research Board, Bull. No. 4.
- Lopez, J. J., Landaras, G., Kisi, O., Stuyt, L. C. P. M., Shiri, J. & Nazemi, A. H. 2011 Daily reference evapotranspiration modeling by using genetic programming approach in the Basque Country (Northern Spain). *J. Hydrol.* **414–415**, 302–316.
- Melville, B. W. & Dongol, D. M. 1992 Bridge pier scour with debris accumulation. *J. Hydraul. Eng.* **118**, 1306–1310.
- Miao, D. Y., Huang, W. W., Li, Y. P. & Yang, Z. F. 2014 Planning water resources systems under uncertainty using an interval-fuzzy de novo programming method. *J. Environ. Informat.* **24** (1), 11–23.
- Najafzadeh, M. 2015 Neuro-fuzzy GMDH systems based evolutionary algorithms to predict scour pile groups in clear water conditions. *Ocean Eng.* **99**, 85–94.
- Najafzadeh, M., Barani, G.-A. & Azamathulla, H. M. 2014 Prediction of pipeline scour depth in clear-water and live-bed conditions using group method of data handling. *Neural Comput. Appl.* **24**, 629–635.
- Newcombe, R. G. 1998 Two-sided confidence intervals for the single proportion: comparison of seven methods. *Stat. Med.* **17** (8), 857–872.
- Pagliara, S. & Carnacina, L. 2010 Temporal scour evolution at bridge piers: effect of wood debris roughness and porosity. *J. Hydraul. Res.* **48** (1), 3–13.
- Pagliara, S. & Carnacina, L. 2011a Influence of wood debris accumulation on bridge pier scour. *J. Hydraul. Eng.* **137**, 254–261.
- Pagliara, S. & Carnacina, L. 2011b Influence of large woody debris on sediment scour at bridge piers. *Int. J. Sediment Res.* **26**, 121–136.
- Pareto, V. 1896 *Cours D'Economie Politique. Rouge and Cic*, Vol. I and II, Lausanne, Switzerland.
- Quinlan, J. R. 1992 Learning with continuous classes. In: *Proceedings of the Fifth Australian Joint Conference on Artificial Intelligence*. World Scientific, pp. 343–348.
- Rahimikhoob, A. 2014 Comparison between M5 model tree and neural networks for estimating reference evapotranspiration in an arid environment. *Water Resour. Manage.* **28**, 657–669.
- Reed, P., Kollat, J. B. & Deviredy, V. K. 2007 Using interactive archives in evolutionary multiobjective optimization: a case study for long-term groundwater monitoring design. *Environ. Modell. Softw.* **22**, 683–692.
- Rezania, M., Javadi, A. & Giustolisi, O. 2010 Evaluation of liquefaction potential based on CPT results using evolutionary polynomial regression. *Comput. Geotech.* **37**, 82–92.
- Rezania, M., Faramarzi, A. & Javadi, A. 2011 An evolutionary based approach for assessment of earthquake-induced soil liquefaction and lateral displacement. *Eng. Appl. Artificial Intell.* **24**, 142–153.
- Sattar, A. M. 2014 Gene expression models for the prediction of longitudinal dispersion coefficients in transitional and turbulent pipe flow. *J. Pipeline Syst. Eng. Pract.* **5**, 4013011.
- Sattar, A. M. A. & Gharabaghi, B. 2015 Gene expression models for prediction of longitudinal dispersion coefficient in streams. *J. Hydrol.* **524**, 587–596.
- Savic, D. A., Giustolisi, O., Berardi, L., Shepherd, W., Djordjevic, S. & Saul, A. 2006 Modelling sewers failure using evolutionary computing. *Proc. ICE, Water Manage.* **159**, 111–118.
- Shiri, J. & Kisi, O. 2011 Comparison of genetic programming with neuro-fuzzy systems for predicting short-term water table depth fluctuations. *J. Geogeo.* **37**, 1692–1701.
- Shiri, J., Sadraddini, A. A., Nazemi, A. H., Kisi, O., Landaras, G., Fakheri Fard, A. & Marti, P. 2014 Generalizability of gene expression programming-based approaches for estimating daily reference evapotranspiration in coastal stations of Iran. *J. Hydrol.* **508**, 1–11.
- Singh, K. K., Pal, M. & Singh, V. P. 2009 Estimation of mean annual flood in Indian catchments using backpropagation neural network and M5 model tree. *Water Resour. Manage.* **24**, 2007–2019.
- Sok, C., Park, J. H. & Young Do Kim, Y. D. 2015 A study on the effects of debris accumulation at sacrificial piles on bridge pier scour: I. Experimental results. *Korean Soc. Civil Eng.* 1–6.
- Taormina, R. & Chau, K. W. 2015 ANN-based interval forecasting of streamflow discharges using the LUBE method and MOFIPS. *Eng. Appl. Artificial Intell.* **45**, 429–440.
- Tropsha, A., Gramatica, P. & Gombar, V. K. 2003 The importance of being earnest: validation is the absolute essential for successful application and interpretation of QSPR models. *QSAR Comb. Sci.* **22** (1), 69–77.
- Van Veldhuizen, D. A. & Lamont, G. B. 2000 Multiobjective evolutionary algorithms analyzing the state-of-the-art. *Evolutionary Computat.* **8**, 125–144.
- Wang, Y. & Witten, I. H. 1997 Induction of model trees for predicting continuous classes. In: *Proceedings of the poster papers of the European Conference on Machine Learning*. Faculty of Informatics and Statistics, University of Economics, Prague.
- Wang, W. C., Chau, K. W., Xu, D. M. & Chen, X. Y. 2015 Improving forecasting accuracy of annual runoff time series using ARIMA based on EEMD decomposition. *Water Resour. Manage.* **29** (8), 2655–2675.
- Wu, C. L., Chau, K. W. & Li, Y. S. 2009 Methods to improve neural network performance in daily flows prediction. *J. Hydrol.* **372** (1–4), 80–93.
- Xu, Y., Huang, G. H., Cheng, G. H., Liu, Y. & Li, Y. F. 2014 A two-stage fuzzy chance-constrained model for solid waste allocation planning. *J. Environ. Inform.* **24** (2), 101–110.
- Zahmatkesh, Z., Karamouz, M., Goharian, E. & Burian, S. 2014a Analysis of the effects of climate change on urban storm

- water runoff using statistically downscaled precipitation data and a change factor approach. *J. Hydrol. Eng.* 10.1061/(ASCE)HE.1943-5584.0001064, 05014022.
- Zahmatkesh, Z., Burian, S., Karamouz, M., Tavakol-Davani, H. & Goharian, E. 2014b Low-impact development practices to mitigate climate change effects on urban stormwater runoff: case study of New York City. *J. Irrig. Drain Eng.* **20** (7), 05014022.
- Zahmatkesh, Z., Karamouz, M. & Nazif, S. 2015 [Uncertainty based modeling of rainfall-runoff: combined differential evolution adaptive metropolis \(DREAM\) and K-means clustering](#). *Adv. Water Resour.* **83**, 405–420.
- Zevenbergen, L. W., Lagasse, P. F., Clopper, P. E. & Spitz, W. J. 2006 Effects of debris on bridge pier scour. In: *Proceedings of the 3rd International Conference on Scour and Erosion (CD-ROM)*, CURNET Gouda Publishers, The Netherlands.
- Zhang, N., Li, Y. P., Huang, W. W. & Liu, J. 2014 An Inexact Two-Stage Water Quality Management Model for Supporting Sustainable Development in a Rural System. *Journal of Environmental Informatics* **24** (1), 52–64.

First received 21 October 2015; accepted in revised form 9 February 2016. Available online 19 March 2016