

# Design and implementation of an operational multimodel multiproduct real-time probabilistic streamflow forecasting platform

Tirthankar Roy, Aleix Serrat-Capdevila, Juan Valdes, Matej Durcik and Hoshin Gupta

## ABSTRACT

The task of real-time streamflow monitoring and forecasting is particularly challenging for ungauged or sparsely gauged river basins, and largely relies upon satellite-based estimates of precipitation. We present the design and implementation of a state-of-the-art real-time streamflow monitoring and forecasting platform that integrates information provided by cutting-edge satellite precipitation products (SPPs), numerical precipitation forecasts, and multiple hydrologic models, to generate probabilistic streamflow forecasts that have an effective lead time of 9 days. The modular design of the platform enables adding/removing any model/product as may be appropriate. The SPPs are bias-corrected in real-time, and the model-generated streamflow forecasts are further bias-corrected and merged, to produce probabilistic forecasts that are computed via several model averaging techniques. The platform is currently operational in multiple river basins in Africa, and can also be adapted to any new basin by incorporating some basin-specific changes and recalibration of the hydrologic models.

**Key words** | bias correction, MMSF-RT platform, probabilistic model averaging, real-time streamflow forecasting, satellite precipitation products

**Tirthankar Roy** (corresponding author)  
Department of Civil and Environmental  
Engineering,  
Princeton University,  
Princeton, NJ, USA  
E-mail: [royt@email.arizona.edu](mailto:royt@email.arizona.edu)

**Tirthankar Roy**  
**Aleix Serrat-Capdevila**  
**Juan Valdes**  
**Matej Durcik**  
**Hoshin Gupta**  
Department of Hydrology and Atmospheric  
Sciences,  
The University of Arizona,  
Tucson, AZ, USA

**Aleix Serrat-Capdevila**  
Water Global Practice,  
The World Bank,  
Washington, DC, USA

**Matej Durcik**  
Biosphere 2,  
The University of Arizona,  
Tucson, AZ, USA

## INTRODUCTION

Robust and accurate streamflow forecasts are needed for several water management applications, including water allocation, ecological management, and flood forecasting, in which they enable better management decisions. Such forecasts can be generated by forcing one or more hydrologic models with real-time hydrometeorological variables and/or their forecasts. Streamflow observations, when available, are used to adjust the model parameters through the process of calibration. If the basin of interest is ungauged or sparsely gauged (in terms of rainfall measurements), the task of generating streamflow forecasts (or any hydrological investigation as such) becomes considerably more challenging, requiring major breakthroughs in theoretical

foundations (Sivapalan 2003; Sivapalan *et al.* 2003). Although the Prediction in Ungauged Basins (PUB) decade of the International Association of Hydrological Sciences (Hrachowitz *et al.* 2013) has helped to drive significant progress on this front, hydrologic modeling for ungauged or sparsely gauged basins remains a major challenge.

Streamflow forecasts are associated with different sources of uncertainties, ranging from the forcing data, model structural inadequacies, improper model parameters, initial and boundary conditions, etc. Due to its ability to characterize forecast uncertainties, the method of ensemble streamflow forecasting has become popular; for an extensive

review see Cloke & Pappenberger (2009) and Cloke *et al.* (2013). Ensemble streamflow forecasts are mainly produced in three different ways: (1) by forcing hydrologic models by an ensemble of precipitation time series to reflect uncertainties in system inputs (e.g., Thielen *et al.* 2008); (2) by using different sets of model parameters to reflect model calibration uncertainties (e.g., GLUE; Beven & Binley 1992); and (3) by using multiple models to reflect model structural uncertainties (e.g., Georgakakos *et al.* 2004; Ajami *et al.* 2007; Duan *et al.* 2007). While the first two approaches overlook the uncertainties arising from structural deficiencies within the model, the third approach has the potential to exploit the information provided by different model structural hypotheses, and thereby account for the uncertainty therein. Examples of some operational streamflow/flood forecasting platforms include European Flood Awareness System (EFAS; Thielen *et al.* 2008), NOAA's Advanced Hydrologic Prediction Service (McEnery *et al.* 2005), Delft-FEWS (Werner *et al.* 2013), etc. Recently, successful efforts have also been made towards developing integrated modeling platforms (combining multiple models) for land surface modeling. One such example is NASA's Land Information System (LIS; Kumar *et al.* 2006, 2008; Mohr *et al.* 2013).

With the advent of satellite-based remote sensing datasets, it is now becoming feasible to generate streamflow forecasts for sparsely gauged basins with a reasonable degree of accuracy (Serrat-Capdevila *et al.* 2014). Roy *et al.* (2017a) recently developed a multimodel and multiproduct real-time (MMSF-RT) streamflow forecasting platform that uses multiple hydrologic models to characterize structural uncertainty, while incorporating a suite of real-time satellite-based precipitation products (SPPs), to overcome the limitations of poor coverage of rain gauges and to also account for the uncertainty in the knowledge of rainfall inputs. The platform does not depend on forecasts created from a single hydrologic model, instead, it combines multiple models (i.e., structural hypotheses) to efficiently account for model structural inadequacies. In this technical note, we report on the design and implementation of MMSF-RT as a state-of-the-art, operational, real-time streamflow monitoring and forecasting platform for several sparsely gauged basins in Africa. We also discuss how the platform can be implemented for other river basins by making

basin-specific changes, or on a computer system having different hardware and software configurations.


---

## THE MMSF-RT PLATFORM

### Methodology

MMSF-RT is a probabilistic streamflow monitoring and forecasting platform (see Figure 1) that currently integrates four different satellite precipitation products, namely TMPA-RT (Huffman *et al.* 2007), CMORPH (Joyce *et al.* 2004), PERSIANN-CCS (Hong *et al.* 2004), and CHIRPS (Funk *et al.* 2014), one numerical precipitation forecast (NPF) (NCEP GFS Forecasts) to increase the forecast lead time, and three structurally different hydrologic models, namely, semi-distributed VIC-3 L (Liang *et al.* 1994, 1996a, 1996b), lumped HYMOD (Boyle *et al.* 2000), and lumped HBV-EDU (Aghakouchak & Habib 2010). The main idea behind building such a platform was to overcome the limitations of a single model or precipitation product; by combining multiple models and products we are able to better characterize model structural and data uncertainties that can affect the forecasts. The platform integrates the following operations: (1) bias correction of the SPPs using reference datasets; (2) calibration of the hydrologic models driven by bias-corrected SPPs; (3) bias correction of the model outputs to remove systematic errors in the forecasts; (4) creating probabilistic forecasts using corresponding historical error distributions; (5) probabilistic model merging to improve the characterization of uncertainty; and (6) final bias correction of the merged forecasts (optional) to minimize any remaining problems. The operational implementation of MMSF-RT also includes some additional features such as web visualization with daily updates, data downloading in different formats, etc.

The Step-I bias correction procedure adjusts the long-term mean (first moment) of the gridded SPPs in an attempt to remove systematic errors. To derive the bias correction factors, we use CHIRPS as the reference satellite dataset since it assimilates information from multiple sources including rain gauge measurements. Because CHIRPS is not available in real-time, the SPP bias analysis is done using historical data based on their common time of


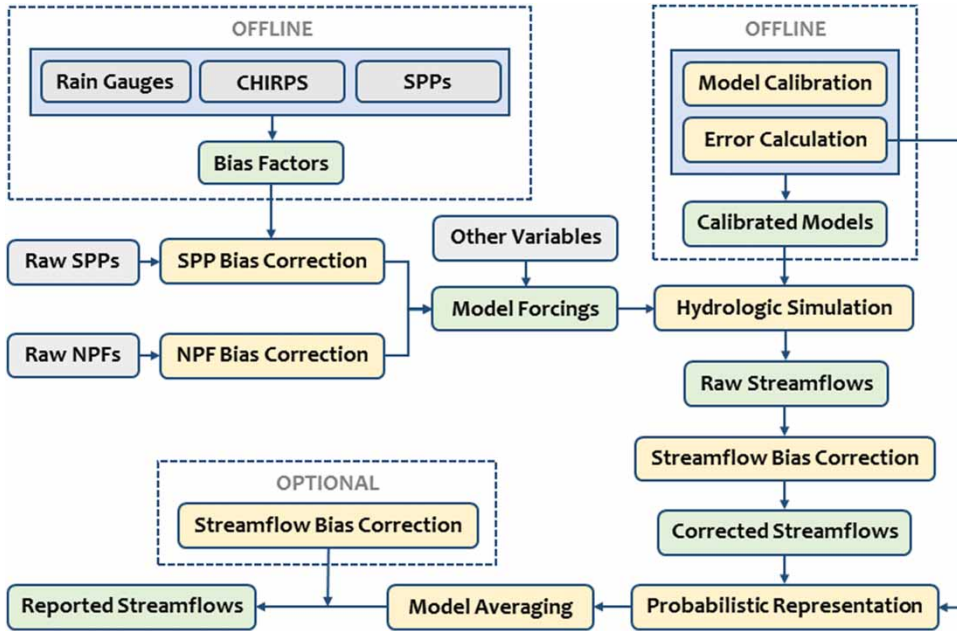


**Figure 1** | The MMSF platform. Note that for basins without historical streamflow observations, model calibration, streamflow bias correction, and probabilistic model averaging are not applicable. In that case, the arithmetic mean is reported as the final forecast and the confidence bounds are calculated from the daily forecast values for each day assuming normal distribution. Bias correction of NPF (NCEP GFS) is not carried out in the current version of the platform.

availability (e.g., 17 years for CMORPH in Mara River basin, Africa), and the bias correction factors obtained thereby are used in the real-time correction of SPPs. When available, we use rain gauge measurements from the study areas to correct the long-term mean of the CHIRPS product in a lumped manner; the corrected CHIRPS is then used to correct the monthly means of other SPPs. [Figure 2\(a\)](#) presents the

precipitation bias correction flow chart and [Figure 2\(b\)](#) an example of bias correction on PERSIANN-CCS.

Each of the hydrologic models included in the platform is independently calibrated for each of the four bias-corrected SPPs used as forcings; the SCE-UA optimization algorithm ([Duan et al. 1992](#)) is used for parameter optimization. For basins with discharge stations, the daily forecasts

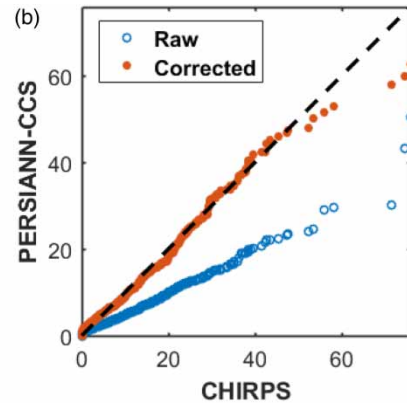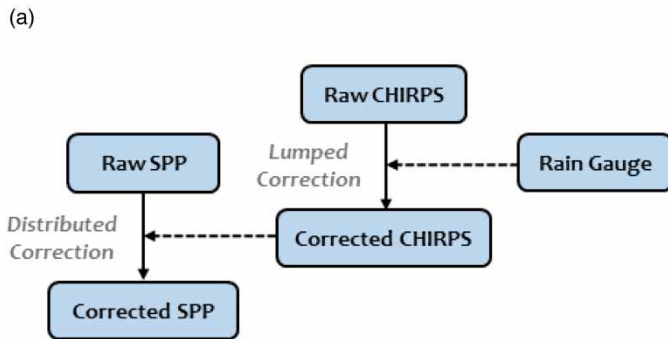

**Figure 2** | Precipitation bias correction procedure. See [Roy et al. \(2017a\)](#) for more details. (a) Precipitation bias correction steps. First, CHIRPS is corrected using rain gauges in a lumped manner, following which, the corrected CHIRPS is used to correct the other SPPs in a distributed manner. (b) An example of precipitation bias correction for PERSIANN-CCS at the Mara River basin, Africa. As can be seen, after the correction, the sorted values follow the 45° line more closely.

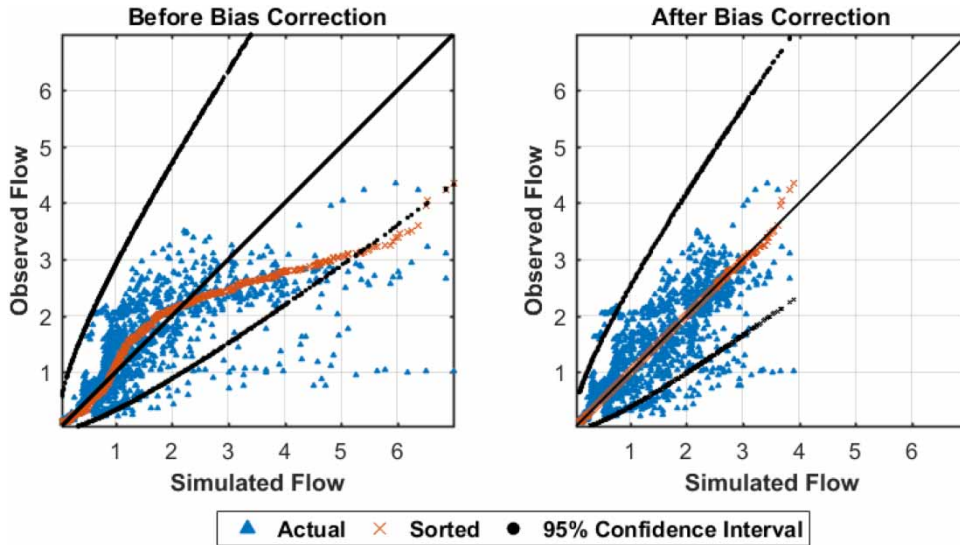


Figure 3 | Bias correction of HBV-EDU forecasts forced with bias-corrected TMPA-RT in the Mara River basin, Africa.

generated by each calibrated model are then bias-corrected using a non-parametric quantile mapping scheme (Roy et al. 2017a) to account for model structural errors reflected in the model outputs, as shown in Figure 3.

The bias-corrected forecasts are merged using three different probabilistic model averaging techniques, namely, uniform weight averaging (UWA), inverse variance averaging (IVA), and Bayesian model averaging (BMA) (Hoeting et al. 1999; Raftery et al. 2005). Figure 4 shows

how the individual probabilistic forecasts (CHIRPS included) on a given day are merged (done for each day of the lead time), and Figure 5 shows an example of the final merged streamflow forecast, along with confidence interval estimates of the uncertainty. Note that for basins with observed streamflow records, the merged forecasts are based on historical error distributions, whereas for basins without discharge stations, we display 95% confidence intervals of the multimodel and multiproduct simulations based


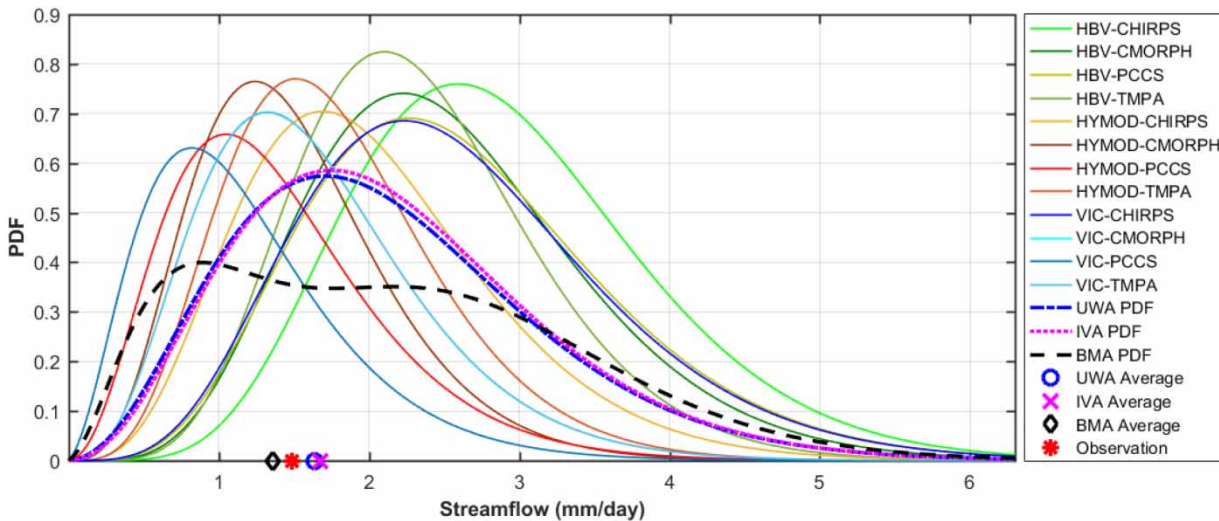


Figure 4 | Example of probabilistic forecast averaging on a particular day (April 10, 2006) in the Mara River basin, Africa. On each day multiple forecasts distributions are created by superimposing the corresponding historical error distributions, which are then merged using various model averaging techniques.

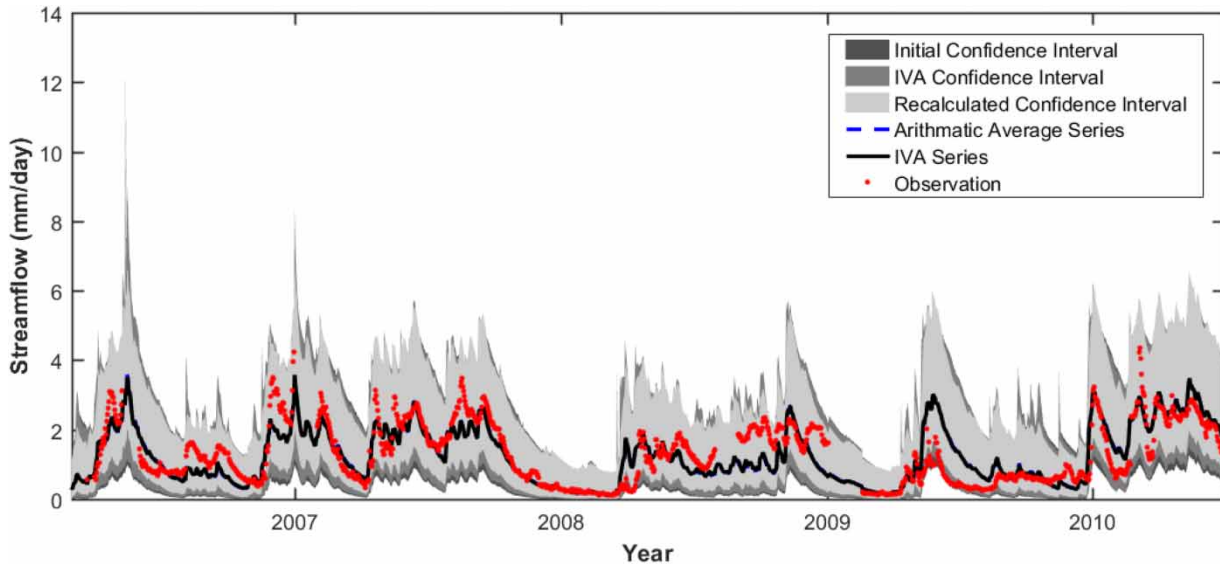

**Figure 5** | Example showing the time series of merged forecasts and their confidence intervals for the Nyangores sub-basin within the Mara River basin, Africa. The recalculated confidence intervals refer to the intervals created from the IVA mean and the observations, by first calculating the errors and then superimposing the 95% confidence bounds of these errors on the daily mean values. See Roy et al. (2017a) for more details.

on the assumption of normal distribution of the daily values. The calculations are carried out on a transformed space that removes skewness (Roy et al. 2017a, 2017b). For more details on the methodology underlying the MMSF platform please refer to Roy et al. (2017a).

### Structure and functions

The MMSF-RT platform (Figure 6) consists of eight main modules that perform the following tasks:


1. Initial setup
2. Precipitation downloading and processing
3. Precipitation bias correction
4. Hydrologic model simulation
5. Streamflow bias correction
6. Probabilistic forecasts representation
7. Probabilistic forecasts merging
8. Visualization and data publication.

In the *first module* (the initial setup), all of the necessary information to run the forecasting platform (e.g., starting date, basin co-ordinates, area, etc.) is loaded. The *second module* downloads and processes daily precipitation data products; the script connects to FTP servers at the data

repositories (three SPPs and NCEP GFS Forecasts) and downloads the data. All of the precipitation products are processed to consistent resolutions (daily temporal and 0.05° spatial). In the *third module*, the processed SPPs are bias corrected using monthly bias factors computed from historical rain gauge measurements and CHIRPS estimates. Precipitation forecasts with 10-day lead time from NCEP GFS are then appended to the SPPs after adjusting for the lag in the local time (compared to GMT), which eventually results in a 9-day effective lead time.

The *fourth module* performs the task of hydrologic modeling. The bias corrected SPPs, with GFS forecasts appended, are fed to the different hydrologic models (VIC, HYMOD, and HBV-EDU). The streamflow forecasts generated by each hydrologic model are further bias corrected in the *fifth module* of the MMSF-RT platform. In the *sixth module*, error distributions computed using the historical data are added to the bias-corrected forecasts (from the fifth module), in order to represent the probabilistic nature of the forecasts. The *seventh module* merges the probabilistic forecasts using several different model averaging techniques (e.g., BMA). Finally, the *eighth module* creates the outputs for web visualization and facilitates data downloading in different formats. For basins without streamflow observations, Steps 5–7 are



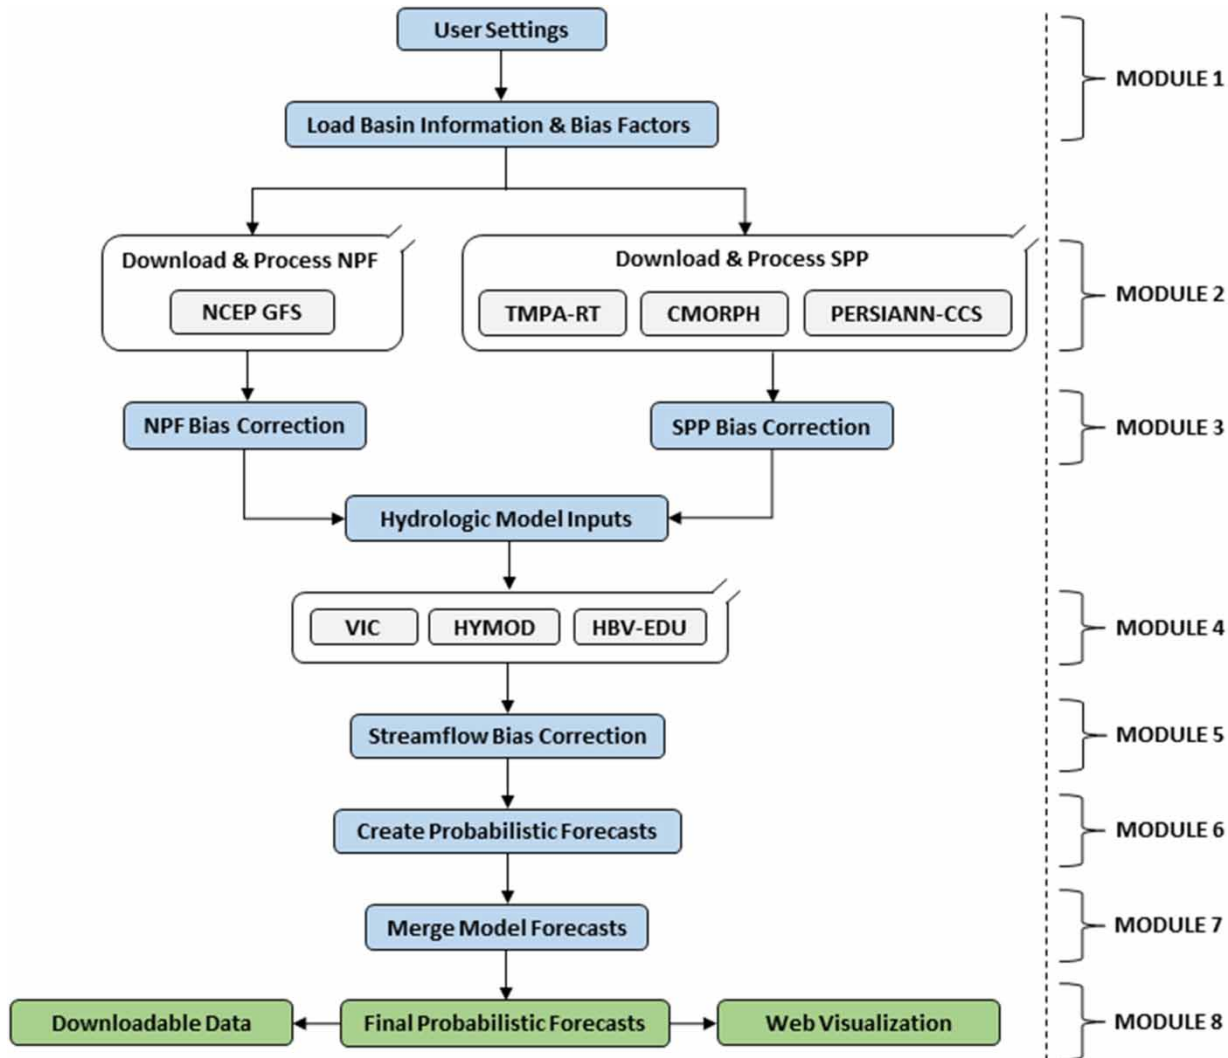

**Figure 6** | Flow diagram showing the steps involved in the daily run of the MMSF-RT platform. Note that the NPF bias correction is not carried out in the current version of the platform.

not applicable. Arithmetic means of the forecasts generated from different model-product combinations are reported as the final forecasts, and the confidence bounds are calculated assuming that the daily forecasts are normally distributed.

## Running the platform

### Modes of run

The platform can run in two different modes, as specified by the user in the first module:

1. Daily run
2. Data filling.

The daily run of the platform is automatic, as controlled by a *scheduler* (see description later). The data-filling mode is useful when the platform needs to be run for hindcasting (historical simulation). It also fills gaps in the daily datasets, which may be due to missing values resulting from past delays in the availability of input data, either for satellite estimates or NPFs. To initiate the data filling mode, the user must specify the dates for which the platform should be run. Since the VIC model is computationally expensive, and its use in the data-filling mode is time-consuming, an

option is available to opt out VIC simulations while running the platform in the data filling (or daily run) mode.

### Time lag

There is invariably a lag between the actual time and the time when the daily data are updated on the corresponding servers. For example, the Mara River basin in Africa is 3 hours ahead of GMT and 10 hours ahead of Tucson, Arizona (where the forecasting platform is implemented). We run the script every day at 5 pm (Arizona time), since by that time all of the datasets for the previous day have become available. Thus, considering the local time in the basin, there can be a lag of almost a day between the last rainfall in the basin and the generation of the streamflow forecasts. However, since we are using 10-day ahead rainfall forecasts from NCEP GFS, the streamflow forecasts effectively provide a 9-day lead time, over and above the concentration time of the basin.

### Scheduler

The MMSF-RT platform is automated using Crontab in Linux, which executes the given commands at a specified

time of the day (e.g., 5 pm in our case). The main forecasting file is introduced through a shell script called by Crontab. Please refer to the Supplementary material for an example showing how the platform is automated using Crontab (available with the online version of this paper).

### Data storage

We store all relevant input data and results for each river basin on a daily basis, which include: (1) distributed daily precipitation (raw and bias-corrected); (2) daily bias-corrected lumped precipitation series; (3) individual model forecasts; (4) arithmetic and probabilistic averages of model forecasts; (5) confidence bounds; and (6) forecasts with 9-day (effective) lead time. All these data can be freely downloaded from our website for research and academic purposes. Figure 7 shows the structure of the folder system to store daily data.

## TOOLBOX AND TRANSFERABILITY

The MMSF-RT platform is written in MATLAB and can integrate executables. Thus, it can be used with a wide range of

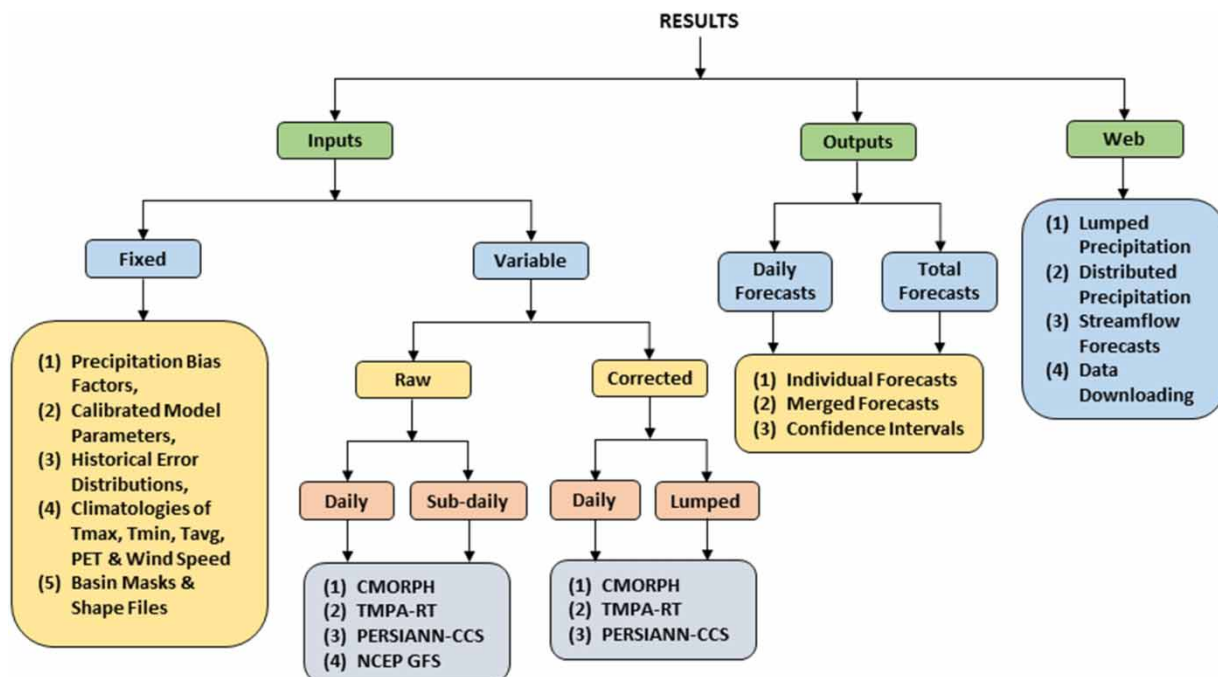


Figure 7 | Folder structure to store the results for any particular river basin.

models written in other programming languages. For example, the current platform includes the VIC model and its routing component (Lohmann *et al.* 1996), compiled from C and FORTRAN, respectively. The toolbox is modular in nature, i.e., it consists of multiple MATLAB function files, each of which is assigned to some particular repetitive task. The toolbox files, and the main MATLAB script that calls all the associated functions, are discussed in the Supplementary material (Table S1, available with the online version of this paper). Due to its modular nature, the platform is flexible; accordingly, any model(s) or precipitation product(s) can be included or excluded from the daily simulations.

The platform is transferrable in two different ways:

1. **Transferring as MATLAB Toolbox:** This requires MATLAB to be installed in the computer where the platform will run. The toolbox comes with all required scripts and data files within a single folder (size <100 MB).
2. **Independent Executables:** This option is useful when MATLAB is not installed in the new system. This version of the forecasting platform comes with an executable file and associated data files (no scripts) that are updated on a daily basis. The new system needs to have the MATLAB Compiler Runtime (MCR) installed in it to run the executable file. Additional information on this topic is provided in the Supplementary material.

The MMSF-RT platform can be transferred to either a new computer system or can be adapted for a new river basin. When transferred to a new computer system, the source codes for the VIC and routing models will need to be recompiled and the directory paths updated (in the text file 'pathfile.asc' provided within the toolbox). When adapting the toolbox to a new basin, some basic-specific tasks will need to be carried out offline before initiating the automated runs. For example, the bias factor files for precipitation bias correction will need to be updated for the new basin and precipitation products. The hydrologic models will need to be re-calibrated for the new basin, thereby producing updated model parameter files. The residual streamflow error distributions will need to be calculated from the historical simulations corresponding to each hydrologic model and precipitation product combination. Note that the last two steps are not applicable for the basins without any streamflow observations.

## VISUALIZATION MODULE

The daily results produced by the MMSF-RT platform are displayed on our research website [www.swaat.arizona.edu](http://www.swaat.arizona.edu). Each day, the website publishes lumped and distributed precipitation plots as well as an interactive streamflow forecasting plot that includes both individual and merged forecasts along with the confidence bounds.

## ACKNOWLEDGEMENTS

This work was supported by the NASA-USAID SERVIR Program through award 11-SERVIR11-58, and by the IWR-USACE International Center for Integrated Water Resources Management (ICIWARM-UNESCO) in developing the first concept prototype.

## REFERENCES

- Aghakouchak, A. & Habib, E. 2010 Application of a conceptual hydrologic model in teaching hydrologic processes. *Int. J. Eng. Educ.* **26** (4), 1–11.
- Ajami, N. K., Duan, Q. & Sorooshian, S. 2007 An integrated hydrologic Bayesian multimodel combination framework: confronting input, parameter, and model structural uncertainty in hydrologic prediction. *Water Resour. Res.* **43** (1), W01403. doi:10.1029/2005WR004745.
- Beven, K. & Binley, A. 1992 The future of distributed models: model calibration and uncertainty prediction. *Hydrol. Process.* **6** (3), 279–298. doi:10.1002/hyp.3360060305.
- Boyle, D. P., Gupta, H. V. & Sorooshian, S. 2000 Toward improved calibration of hydrologic models: combining the strengths of manual and automatic methods. *Water Resour. Res.* **36** (12), 3663–3674. doi:10.1029/2000WR900207.
- Cloke, H. L. & Pappenberger, F. 2009 Ensemble flood forecasting: a review. *J. Hydrol.* **375** (3–4), 613–626. doi:10.1016/j.jhydrol.2009.06.005.
- Cloke, H. L., Pappenberger, F., van Andel, S. J., Schaake, J., Thielen, J. & Ramos, M. H. 2013 Hydrological ensemble prediction systems. *Hydrol. Process.* **27** (1), 1–4. doi:10.1002/hyp.9679.
- Duan, Q., Sorooshian, S. & Gupta, V. 1992 Effective and efficient global optimization for conceptual rainfall-runoff models. *Water Resour. Res.* **28** (4), 1015–1031. doi:10.1029/91WR02985.
- Duan, Q., Ajami, N. K., Gao, X. & Sorooshian, S. 2007 Multi-model ensemble hydrologic prediction using Bayesian model averaging. *Adv. Water Resour.* **30** (5), 1371–1386. doi:10.1016/j.advwatres.2006.11.014.



- Funk, C. C., Peterson, P. J., Landsfeld, M. F., Pedreros, D. H., Verdin, J. P., Rowland, J. D., Romero, B. E., Husak, G. J., Michaelsen, J. C. & Verdin, A. P. 2014 *A Quasi-Global Precipitation Time Series for Drought Monitoring*. US Geological Survey Data Series 832, p. 4.
- Georgakakos, K. P., Seo, D.-J., Gupta, H., Schaake, J. & Butts, M. B. 2004 Towards the characterization of streamflow simulation uncertainty through multimodel ensembles. *J. Hydrol.* **298** (1–4), 222–241. doi:10.1016/j.jhydrol.2004.03.037.
- Hoeting, J. A., Madigan, D., Raftery, A. E. & Volinsky, C. T. 1999 Bayesian model averaging: a tutorial. *Stat. Sci.* **14** (4), 382–417.
- Hong, Y., Hsu, K.-L., Sorooshian, S. & Gao, X. 2004 Precipitation estimation from remotely sensed imagery using an artificial neural network cloud classification system. *J. Appl. Meteorol.* **43** (12), 1834–1853. doi:10.1175/JAM2173.1.
- Hrachowitz, M., Savenije, H. H. G., Blöschl, G., McDonnell, J. J., Sivapalan, M., Pomeroy, J. W., Arheimer, B., Blume, T., Clark, M. P., Ehret, U., Fenicia, F., Freer, J. E., Gelfan, A., Gupta, H. V., Hughes, D. A., Hut, R. W., Montanari, A., Pande, S., Tetzlaff, D., Troch, P. A., Uhlenbrook, S., Wagener, T., Winsemius, H. C., Woods, R. A., Zehe, E. & Cudennec, C. 2013 A decade of predictions in ungauged basins (PUB) – a review. *Hydrol. Sci. J.* **58** (6), 1198–1255. doi:10.1080/02626667.2013.803183.
- Huffman, G. J., Bolvin, D. T., Nelkin, E. J., Wolff, D. B., Adler, R. F., Gu, G., Hong, Y., Bowman, K. P. & Stocker, E. F. 2007 The TRMM multisatellite precipitation analysis (TMPA): Quasi-global, multiyear, combined-sensor precipitation estimates at fine scales. *J. Hydrometeorol.* **8** (1), 38–55. doi:10.1175/JHM560.1.
- Joyce, R. J., Janowiak, J. E., Arkin, P. A. & Xie, P. 2004 CMORPH: a method that produces global precipitation estimates from passive microwave and infrared data at high spatial and temporal resolution. *J. Hydrometeorol.* **5** (3), 487–503. doi:10.1175/1525-7541(2004)005 <0487:CAMTPG >2.0.CO;2.
- Kumar, S. V., Peters-Lidard, C. D., Tian, Y., Houser, P. R., Geiger, J., Olden, S., Lighty, L., Eastman, J. L., Doty, B., Dirmeyer, P., Adams, J., Mitchell, K., Wood, E. F. & Sheffield, J. 2006 Land information system: an interoperable framework for high resolution land surface modeling. *Environ. Model. Softw.* **21** (10), 1402–1415. doi:10.1016/j.envsoft.2005.07.004.
- Kumar, S. V., Peters-Lidard, C. D., Eastman, J. L. & Tao, W.-K. 2008 An integrated high-resolution hydrometeorological modeling testbed using LIS and WRF. *Environ. Model. Softw.* **23** (2), 169–181. doi:10.1016/j.envsoft.2007.05.012.
- Liang, X., Lettenmaier, D. P., Wood, E. F. & Burges, S. J. 1994 A simple hydrologically based model of land surface water and energy fluxes for general circulation models. *J. Geophys. Res.* **99** (D7), 14415. doi:10.1029/94JD00483.
- Liang, X., Lettenmaier, D. P. & Wood, E. F. 1996a One-dimensional statistical dynamic representation of subgrid spatial variability of precipitation in the two-layer variable infiltration capacity model. *J. Geophys. Res.* **101** (D16), 21403–21422.
- Liang, X., Wood, E. F. & Lettenmaier, D. P. 1996b Surface soil moisture parameterization of the VIC-2 L model: evaluation and modifications. *J. Glob. Planet. Chang.* **13**, 195–206. Available from: <http://www.hydro.washington.edu/Lettenmaier/Models/VIC/VIChome.html>.
- Lohmann, D., Nolte-Holube, R. & Raschke, E. 1996 A large-scale horizontal routing model to be coupled to land surface parametrization schemes. *Tellus A* **48** (5), 708–721. doi:10.1034/j.1600-0870.1996.t01-3-00009.x.
- McEnery, J., Ingram, J., Duan, Q., Adams, T. & Anderson, L. 2005 NOAA's advanced hydrologic prediction service: building pathways for better science in water forecasting. *Bull. Am. Meteorol. Soc.* **86** (3), 375–385. doi:10.1175/BAMS-86-3-375.
- Mohr, K. I., Tao, W.-K., Chern, J.-D., Kumar, S. V. & Peters-Lidard, C. D. 2013 The NASA-goddard multi-scale modeling framework–land information system: global land/atmosphere interaction with resolved convection. *Environ. Model. Softw.* **39**, 103–115. doi:10.1016/j.envsoft.2012.02.023.
- Raftery, A. E., Gneiting, T., Balabdaoui, F. & Polakowski, M. 2005 Using Bayesian model averaging to calibrate forecast ensembles. *Mon. Weather Rev.* **133** (5), 1155–1174. doi:10.1175/MWR2906.1.
- Roy, T., Serrat-Capdevila, A., Gupta, H. & Valdes, J. 2017a A platform for probabilistic multimodel and multiproduct streamflow forecasting. *Water Resour. Res.* **53**. doi:10.1002/2016WR019752.
- Roy, T., Gupta, H. V., Serrat-Capdevila, A. & Valdes, J. B. 2017b Using satellite-based evapotranspiration estimates to improve the structure of a simple conceptual rainfall-runoff model. *Hydrol. Earth Syst. Sci.* **21** (2), 879–896. doi:10.5194/hess-21-879-2017.
- Serrat-Capdevila, A., Valdes, J. B. & Stakhiv, E. Z. 2014 Water management applications for satellite precipitation products: synthesis and recommendations. *J. Am. Water Resour. Assoc.* **50** (2), 509–525. doi:10.1111/jawr.12140.
- Sivapalan, M. 2003 Prediction in ungauged basins: a grand challenge for theoretical hydrology. *Hydrol. Process.* **17**, 3163–3170.
- Sivapalan, M., Takeuchi, K., Franks, S. W., Gupta, V. K., Karambiri, H., Lakshmi, V., Liang, X., McDonnell, J. J., Mendiondo, E. M., O'Connell, P. E., Oki, T., Pomeroy, J. W., Schertzer, D., Uhlenbrook, S. & Zehe, E. 2003 IAHS decade on Predictions in Ungauged Basins (PUB), 2003–2012: shaping an exciting future for the hydrological sciences. *Hydrol. Sci. J.* **48** (6), 857–880. doi:10.1623/hysj.48.6.857.51421.
- Thielen, J., Bartholmes, J., Ramos, M.-H. & de Roo, A. 2008 The European flood alert system – Part 1: concept and development. *Hydrol. Earth Syst. Sci. Discuss.* **5** (1), 257–287. doi:10.5194/hessd-5-257-2008.
- Werner, M., Schellekens, J., Gijsbers, P., Van Dijk, M., Van Den Akker, O. & Heynert, K. 2013 The Delft-FEWS flow forecasting system. *Environ. Model. Softw.* **40**, 65–77. doi:10.1016/j.envsoft.2012.07.010.