

Evaluation of hydrodynamic characteristics of porous media from one-step outflow experiments using RETC code

P. Londra and G. Kargas

ABSTRACT

The ability of simulation models to accurately predict water flow and solute transport in unsaturated soils usually depends on the accuracy of the parametric models used to describe the water retention curve $\theta(h)$ and unsaturated hydraulic conductivity $K(\theta)$. Experiments were conducted to determine $\theta(h)$ and $K(\theta)$ relationships of six different porous media. $\theta(h)$ relationships were determined using Haines-type assembly or Richards' pressure cell chambers, depending on the soil type. $K(\theta)$ relationships were determined using the one-step outflow method. RETC code was used to analyze hydraulic properties. Experimental data were compared with those predicted by the Mualem-van Genuchten model using RETC for two prediction scenarios with three fitting parameters a , n , θ_r . The first scenario uses as input data the experimental $\theta(h)$ and saturated hydraulic conductivity (K_s) measurements and the second, the experimental $\theta(h)$, $K(\theta)$ and K_s measurements for two types of conductivity regression analysis. Concerning the second scenario, the Mualem model parameter p as an additional fitting parameter was also examined. Analysis of the results showed that the best method for predicting both the $\theta(h)$ and $K(\theta)$ relationships is to use simultaneously the experimental $\theta(h)$, $K(\theta)$ and K_s data with four fitting parameters a , n , θ_r , p .

Key words | hydraulic conductivity, Mualem-van Genuchten model, RETC code, water retention curve

P. Londra (corresponding author)

G. Kargas

Laboratory of Agricultural Hydraulics, School of Agricultural Production, Infrastructures and Environment,

Agricultural University of Athens, 75 Iera Odos Street, 11855 Athens, Greece

E-mail: v.londra@aua.gr

INTRODUCTION

The knowledge of two main hydraulic properties, water retention curve $\theta(h)$ and unsaturated hydraulic conductivity $K(\theta)$, is necessary in studying the movement of water and soluble salts in unsaturated soils, as well as in their simulation models. The determination of soil hydraulic properties can be achieved either with field-based or laboratory methods. Each method is characterized by specific properties with their limitations and inherent assumptions (Bordoni *et al.* 2017). However, in laboratory methods, while the water retention curve $\theta(h)$ can be determined relatively quickly and easily, the determination of hydraulic conductivity as a function of soil water content, $K(\theta)$, or pressure head, $K(h)$, is a difficult and time-consuming process. For this reason, several statistical models of pore size distribution have been developed for the indirect prediction

of $K(\theta)$ using water retention curve and saturated hydraulic conductivity K_s (Childs & Collis George 1950; Burdine 1953; Mualem 1976). The introduction of analytical expressions of the water retention curve $\theta(h)$ in combination with the abovementioned models led to closed-form analytical predictive models of hydraulic properties (Brooks & Corey 1964; van Genuchten 1980). Typically, the absence of experimental data, especially $K(\theta)$ data, has led to the widespread use of closed-form analytical predictive models in the prediction of hydraulic properties (Ghazanfari *et al.* 2016; Arrey *et al.* 2018). This suggests the necessity of assessing the accuracy of the hydraulic property predictions since unsaturated hydraulic conductivity plays an integral role in determining the accuracy of any numerical solution to water flow and contamination problems (Yates *et al.* 1992).

In some cases, it has already been proved that the calculated values of $K(\theta)$ deviate significantly from measured values (Talsma 1985; Yates *et al.* 1992; Valiantzas *et al.* 2007; Londra 2010).

The one-step outflow method (Doering 1965) is one of the most widely used laboratory methods for determining the soil–water diffusivity relationship $D(\theta)$. The method can be easily adopted for routine laboratory work, e.g. is easily applied in the same soil sample and apparatus that are used for the determination of the soil–water diffusivity relationship $D(\theta)$, and the soil–water retention curve. The $K(\theta)$ relationship can then be calculated using $D(\theta)$ and water retention data (Childs & Collis George 1950).

Many researchers have proposed analytical methods for calculating $D(\theta)$ from the one-step outflow data without the required assumptions of any mathematical form for the hydraulic properties, which is an advantage (e.g. Passioura 1976; Valiantzas 1989; Valiantzas *et al.* 2007; Londra & Valiantzas 2011). However, in these cases, independently measured $\theta(h)$ data to determine unsaturated hydraulic conductivity $K(\theta)$ is required. Valiantzas *et al.* (2007) proposed a direct method based on a simple curve-fitting procedure applied to the experimental outflow data for a simple power and extended power form function which leads to direct calculation of the soil water diffusivity function from explicit formulae.

Alternatively, in many cases, parameter estimation methods together with outflow experiments for determining hydraulic properties have been used (e.g. Parker *et al.* 1985; van Dam *et al.* 1992; Bitterlich *et al.* 2004). However, an assumption of particular mathematical forms for the hydraulic properties is required.

The main disadvantage of the one-step outflow method is the weakness to predict $K(\theta)$ values near saturation, due to the fact that the outflow method cannot be applied at the first stage of outflow, where the flow rate is essentially controlled by the porous plate resistance (Passioura 1976). This disadvantage may be overcome using RETC code (van Genuchten *et al.* 1991) as has been studied recently in a sand sample by Bourazanis *et al.* (2016). More specifically, the comparison between $K(\theta)$ values near saturation measured by steady-state laboratory method and predictions obtained by RETC code using simultaneously experimental $\theta(h)$ values and $K(\theta)$ from one-step outflow method showed very good agreement.

The RETC code enables the calculation of the conceptual models parameters either by fitting only the water retention data for predicting the hydraulic conductivity function or by fitting simultaneously both water retention and hydraulic conductivity experimental data, assuming various analytical forms of $\theta(h)$ and $K(\theta)$, by including the effect of pore connectivity, i.e. parameter p of the Mualem model (Mualem 1976). Many researchers have used RETC code with different scenarios and number of model-fitting parameters with various results (van Genuchten & Leij 1992; Yates *et al.* 1992; Schaap & van Genuchten 2006; Kargas & Londra 2015; Bourazanis *et al.* 2016). However, in cases where the water retention and hydraulic conductivity experimental data are simultaneously used, it is rarely reported whether the experimental data were obtained from the same soil sample using the same apparatus. In addition, among the different methods of determining $K(\theta)$ relationship, there is a large difference in the range of water content and pressure-head measurements (Stolte *et al.* 1994). Also, Siltecho *et al.* (2015) demonstrated that the van Genuchten unsaturated soil parameters were significantly different according to the measurement methods employed.

These factors may play a significant role in the results of various prediction scenarios and the necessary number of fitting parameters.

From the research published so far, it seems that the prediction of soil hydraulic properties has not been considered when experimental $\theta(h)$ and $K(\theta)$ data are used simultaneously as input data in the RETC program when the $K(\theta)$ data have been obtained from the one-step outflow method. More specifically, when the $K(\theta)$ data are obtained by using the simplified equation of Valiantzas *et al.* (2007).

The main objectives of the present study were to experimentally determine, on the same soil sample and in the same apparatus, $\theta(h)$ and $K(\theta)$ relationships in six porous media using the one-step outflow method and then compare the experimental values with those predicted by assuming the Mualem–van Genuchten model (Mualem 1976; van Genuchten 1980) using RETC code (van Genuchten *et al.* 1991) for two prediction scenarios with three model fitting parameters (α , n , θ_r) each. In the case of the second scenario applied, the Mualem model parameter p as an additional fitting parameter was also examined.

MATERIALS AND METHODS

Porous media

Experiments to determine the water retention curves followed by the one-step outflow procedure to determine $D(\theta)$ and then $K(\theta)$ were performed in the laboratory for six disturbed porous media with different soil textures: a sand ($0.2 \text{ mm} < d < 0.5 \text{ mm}$), a sandy loam (13.2% clay, 8% silt, 78.8% sand), a loam (20% clay, 38% silt, 42% sand), a clay loam (28% clay, 37% silt, 35% sand), a silty clay loam (36.5% clay, 52% silt, 11.5% sand) and a clay soil (47% clay, 36% silt, 17% sand). Note that the clay soil aggregate was used with aggregation fraction 0.5–1.2 mm.

Experimental procedure

Water retention curve

Water retention curve measurements and one-step outflow experiments were performed in the laboratory using: (i) a Haines-type assembly (Haines 1930) for the sand and sandy loam soil; and (ii) Richards' pressure cell chambers (Kargas & Londra 2015) for the loam, clay loam, silty clay loam and clay soil. Initially, the water retention curves $\theta(h)$ were measured, followed by the one-step outflow experiment.

Disturbed soil samples of the sand and sandy loam soil, 2.5 cm high and 9.6 cm diameter, were placed on a tension plate apparatus in a Haines-type assembly, and samples of the loam, clay loam, silty clay loam and clay soil, 3 cm high and 7 cm diameter, were placed in a Richards' pressure cell chambers.

Soil samples were allowed to wet from the bottom of the tension plate gradually until saturation. After that, the samples were subjected to a drying-wetting cycle and the primary drying water-retention-curve data were obtained by applying: (i) negative pressure steps through the saturated tension plate, in the case of Haines-type assembly; and (ii) gas pressure steps to the top of the soil sample, in the case of Richards' cell, weighting the water lost at various pressure steps.

One-step outflow experiment

At the end of the water-retention-curve measurement, on the same samples, in the same apparatus, saturation of the

samples was performed, followed by the one-step outflow procedure.

A large negative or positive pressure step h_f (L) was suddenly applied at the bottom of the sample (Haines-type assembly) or at the top of the sample (Richards' cell), respectively, equal to the final pressure step used in the determination of the water retention curve ($h_f = -90 \text{ cm}$ for sand, $h_f = -134 \text{ cm}$ for sandy loam soil, $h_f = +700 \text{ cm}$ for loam, clay loam, silty clay loam and clay soil) and the cumulative outflow volumes V_i (L^3) were recorded with time t_i (T) ($i = 1, 2, 3 \dots N$). The time steps used were 5 seconds at the beginning of the experiment and then they were adjusted according to the outflow rate, depending on the soil type, reaching gradually 1,800 seconds at the end of the experiment. The total times were 6,450, 6,696, 12,098, 16,052, 18,372 and 24,035 seconds for sand, sandy loam, clay loam, loam, clay and silty clay loam soil, respectively.

Subsequently, the corresponding mean volumetric water content $\bar{\theta}_i$ ($\text{L}^3 \text{ L}^{-3}$) was calculated as $\bar{\theta}_i = \theta_s - V_i/V_o$, where θ_s is the volumetric water content at saturation ($\text{L}^3 \text{ L}^{-3}$) and V_o is the sample volume (L^3). Then, the dimensionless variable S which represents the fraction of remaining outflow water volume and is obtained from the original outflow data, $V(t)$,

$$S = \frac{\bar{\theta} - \theta_f}{\theta_s - \theta_f}, \quad 0 \leq S \leq 1 \quad (1)$$

was plotted against the square root of time $\sqrt{t}(\text{T}^{1/2})$ (Valiantzas *et al.* 2007).

After identifying the curve fitting region of the $S(\sqrt{t})$ plot corresponding to stage III of the outflow, in which the effect of the porous plate impedance becomes negligible (Valiantzas *et al.* 2007), a simple regression of a three-parameter power function (Valiantzas *et al.* 2007) was applied:

$$S(\sqrt{t}) = a(\sqrt{t})^b + c \quad (2)$$

and the a , b and c curve-fitting parameters were obtained.

In Figure 1, an example of schematic illustration of the experimental $S(\sqrt{t})$ function for silty clay loam soil, and the three-parameter power fitting function (Equation (2)) is presented. The three stages of outflow, according to Passioura (1976), are clearly identifiable. In the first stage,

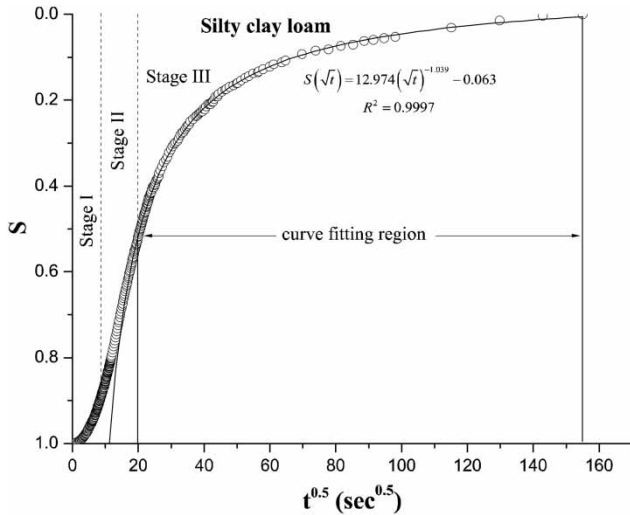


Figure 1 | Experimental fraction of water remaining for outflow with time, $S(\sqrt{t})$, for silty clay loam soil (open cycles) and fitted curve $S(\sqrt{t}) = a(\sqrt{t})^p + c$ (solid line).

corresponding to the initial part of the curve before the outflow becomes linear with \sqrt{t} , it is the plate impedance only that determines the outflow rate. In the second stage, during which the outflow varies linearly with \sqrt{t} , the effect of plate impedance has not yet become negligible. The third stage corresponds to the portion of the curve where cumulative outflow ceases to be linear with \sqrt{t} and the effect of plate impedance is minimal.

Then, soil water diffusivity as a function of mean volumetric water content $D(\bar{\theta})$ (L^2T^{-1}) was calculated from the one-step outflow data using the Valiantzas *et al.* (2007) equation:

$$D(\bar{\theta}) = -\frac{2L^2a^{2/b}}{\pi^2} \left(\frac{\bar{\theta} - \theta_f}{\theta_s - \theta_f} - c \right)^{-2/b} \left[b - 1 - (b/2)c \left(\frac{\theta_s - \theta_f}{\bar{\theta} - \theta_f} \right) \right] \quad (3)$$

where L is the length of the sample (L), θ_f is the final volumetric water content ($L^3 L^{-3}$), and a , b , c are the fitting parameters obtained from Equation (2). The proposed equation has been validated for various types of soils and substrates (Valiantzas *et al.* 2007; Kargas & Londra 2015; Bourazanis *et al.* 2016).

Then, the $K(\theta)$ (LT^{-1}) relationship was calculated using the equation (Childs & Collis-George 1950):

$$K(\theta) = D(\bar{\theta}) \frac{d\theta}{dh} \quad (4)$$

The slope $d\theta/dh$ (L^{-1}) was calculated from the experimental water retention curve.

The saturated hydraulic conductivity, K_s (LT^{-1}) was independently determined by the constant-head method (Klute & Dirksen 1986).

RETC code

The RETC program (van Genuchten *et al.* 1991) was used to calculate the fitting parameters of the widespread Mualem-van Genuchten model (Mualem 1976; van Genuchten 1980) on the experimental data of water retention curve and hydraulic conductivity as derived from the one-step outflow data. The water retention curve is described by van Genuchten (1980) as

$$\theta(h) = (\theta_s - \theta_r) \left(\frac{1}{1 + \alpha|h|^n} \right)^m + \theta_r \quad (5)$$

where θ_s and θ_r are the saturated and residual values of the volumetric water content θ ($L^3 L^{-3}$), and α (L^{-1}), m (-), n (-) are retention-curve-fitting parameters, $m = 1 - 1/n$ and $0 < m < 1$.

Combining Equation (5) with the model developed by Mualem (1976), $K(\theta)$ can be calculated as

$$K(\theta) = K_s \left(\frac{\theta - \theta_r}{\theta_s - \theta_r} \right)^p \left\{ 1 - \left[1 - \left(\frac{\theta - \theta_r}{\theta_s - \theta_r} \right)^{1/m} \right]^m \right\}^2 \quad (6)$$

where K_s is the saturated hydraulic conductivity and p (-) is a pore-connectivity parameter with a conventional value at 0.5 (Mualem 1976).

The model-fitting parameters described above were evaluated by RETC program from measured water retention and hydraulic conductivity data. The unknown parameters of the Mualem-van Genuchten (M-vG) model in the parameter optimization process to fit the water retention and unsaturated hydraulic conductivity functions were θ_r , α and n using two scenarios. In the first scenario, the experimental data of water retention curve and saturated hydraulic conductivity (K_s) were used as input data. In the second scenario, the experimental values of $\theta(h)$, K_s and $K(\theta)$ calculated from $D(\theta)$ values using experimental outflow data were used as input data and two types of conductivity model were examined for regression analysis. Type I: 'Conductivity versus Water Content' and Type II: 'Logarithmically

Transformed Conductivity versus Water Content'. The value of the parameter p was either taken as constant and equal to 0.5, a value widely used (Mualem 1976), or as a fitting parameter. Evaluation of the results was performed by comparing experimental and predicted values using root mean squared errors (RMSE).

RESULTS AND DISCUSSION

In any case studied, the M-vG model fitting parameters α , n , θ_r , as well as the experimental values θ_s , K_s for all porous media examined, are given in Table 1. It is worthy of note that high predicted θ_r values of the fine textured soils examined can be attributed to the fact that they come from mathematical fitting which is affected by the low pressure step ($h_f = +700$ cm) applied. In this pressure, a sufficiently large proportion might not be drained from the total pore space. This indicates the need to apply a higher pressure step for measuring the hydraulic properties and evaluating the fitting parameters. Also, the fact that θ_r values of clay soil are lower than those of clay loam and silty clay loam should be attributed to the nature of the sample. As presented in the materials and method section, clay sample is not a typical soil like others but includes only an aggregated fraction of 0.5–1.2 mm soil particles.

As shown in Figure 2, it is apparent that there is a very good agreement of the results between experimental and predicted values of $\theta(h)$ for the first scenario, indicating that the corresponding soil hydraulic parameters listed in Table 1 provide an adequate description of $\theta(h)$ relationship. This is demonstrated by taking into consideration the acceptable small values of RMSE listed in Table 2.

On the other hand, the soil hydraulic parameters of the first prediction scenario, which is the most common used, using as input data only the experimental $\theta(h)$ and K_s data, do not adequately describe the $K(\theta)$ relationship (Figure 3). The $K(\theta)$ curves show a variable and unpredictable behavior, suggesting a non-reliable estimation based only on retention data $\theta(h)$. This is also shown by the large values of RMSE (Table 2).

In Figure 3 a comparison between $K(\theta)$ values from experimental one-step outflow data and predictions obtained by RETC for the two prediction scenarios are

Table 1 | The Mualem-van Genuchten parameters α , n , θ_r obtained by RETC code

| Porous medium | RETC | | | Experimental | | |
|-----------------|------------------------------|---------|--|--|-------------------------------|--------|
| | α (cm ⁻¹) | n (-) | θ_r (cm ³ cm ⁻³) | θ_s (cm ³ cm ⁻³) | K_s (cm min ⁻¹) | |
| Sand | <i>1st scenario</i> | | | | | |
| | | 0.029 | 13.746 | 0.020 | 0.275 | 0.521 |
| | <i>2nd scenario</i> | | | | | |
| | Type I | 0.029 | 14.219 | 0.026 | 0.275 | 0.521 |
| | Type II | 0.030 | 15.978 | 0.057 | 0.275 | 0.521 |
| Sandy loam | <i>1st scenario</i> | | | | | |
| | | 0.019 | 1.941 | 0 | 0.470 | 0.292 |
| | <i>2nd scenario</i> | | | | | |
| | Type I | 0.025 | 1.666 | 0.008 | 0.470 | 0.292 |
| | Type II | 0.026 | 1.875 | 0.086 | 0.470 | 0.292 |
| Loam | <i>1st scenario</i> | | | | | |
| | | 0.013 | 1.257 | 0 | 0.547 | 0.049 |
| | <i>2nd scenario</i> | | | | | |
| | Type I | 0.014 | 1.250 | 0 | 0.547 | 0.049 |
| | Type II | 0.016 | 1.261 | 0.056 | 0.547 | 0.049 |
| Silty clay loam | <i>1st scenario</i> | | | | | |
| | | 0.013 | 1.154 | 0 | 0.493 | 0.0032 |
| | <i>2nd scenario</i> | | | | | |
| | Type I | 0.012 | 1.639 | 0.305 | 0.493 | 0.0032 |
| | Type II | 0.013 | 1.742 | 0.326 | 0.493 | 0.0032 |
| Clay loam | <i>1st scenario</i> | | | | | |
| | | 0.080 | 1.169 | 0 | 0.498 | 0.0247 |
| | <i>2nd scenario</i> | | | | | |
| | Type I | 0.029 | 4.563 | 0.308 | 0.498 | 0.0247 |
| | Type II | 0.026 | 2.342 | 0.259 | 0.498 | 0.0247 |
| Clay | <i>1st scenario</i> | | | | | |
| | | 0.083 | 1.644 | 0.229 | 0.569 | 0.547 |
| | <i>2nd scenario</i> | | | | | |
| | Type I | 0.057 | 1.291 | 0 | 0.569 | 0.547 |
| | Type II | 0.115 | 1.422 | 0.191 | 0.569 | 0.547 |

Note: Input data used were: (i) the experimental values of $\theta(h)$ and K_s (1st scenario); and (ii) the experimental values of $\theta(h)$, K_s and $K(\theta)$ from one-step outflow data (2nd scenario) for the two types of conductivity model (Type I and Type II), as well as the experimental θ_s and K_s values.

presented. The values of $K(\theta)$ were obtained by Equation (4) taking into account experimental one-step outflow data and water retention curve.

As shown in Figure 3, in the case of the second prediction scenario, using as input data simultaneously the experimental $\theta(h)$, $K(\theta)$ and K_s values for Type I of conductivity regression analysis, the prediction of $K(\theta)$ is satisfactorily improved compared to the first prediction scenario except in the case of clay soil, while for Type II of conductivity regression analysis, a very satisfactory prediction of $K(\theta)$ is obtained for all porous media studied.

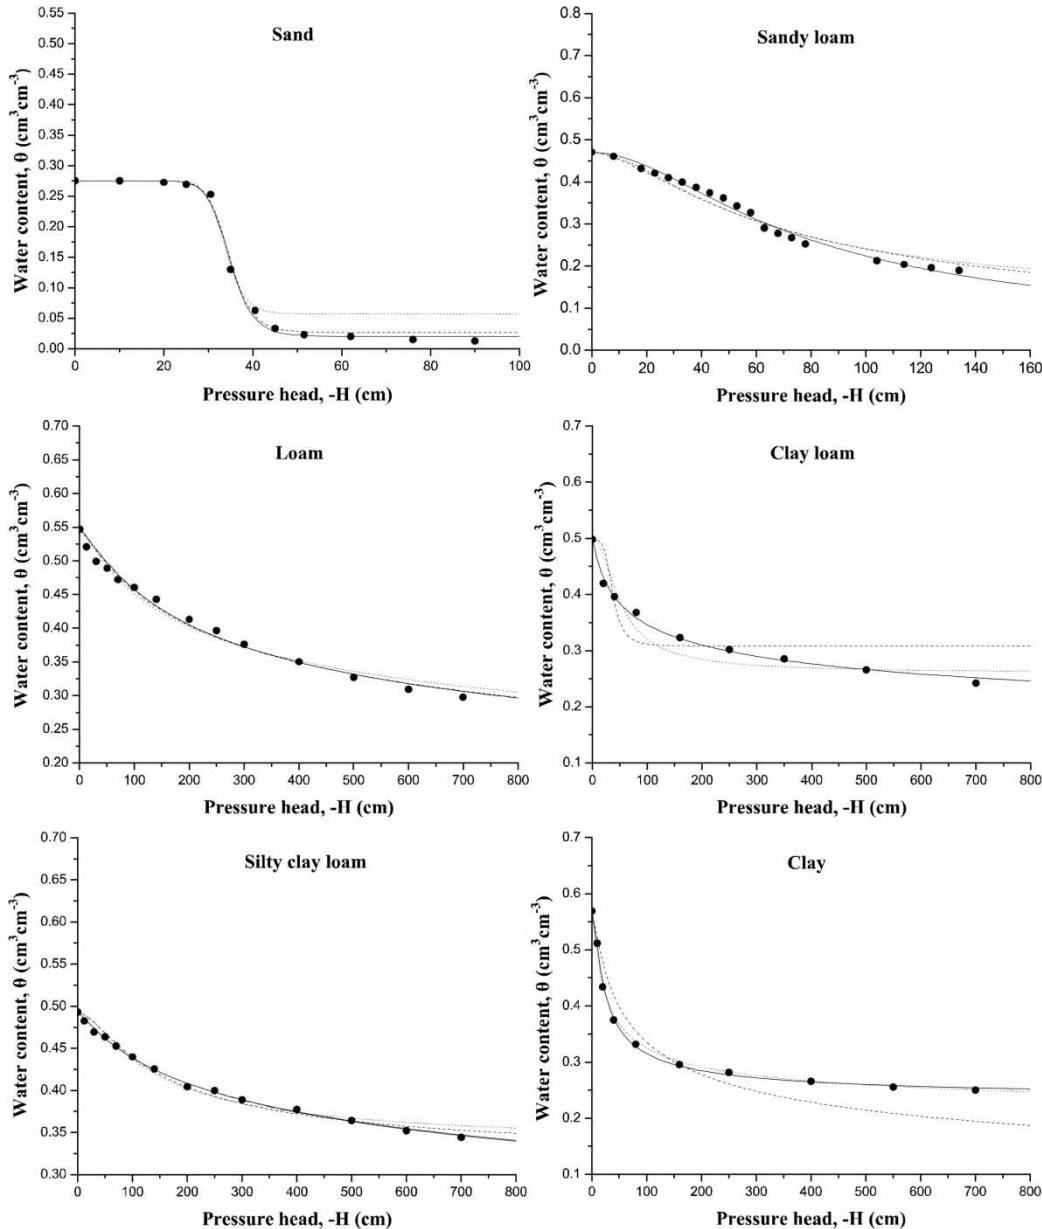


Figure 2 | Experimental water retention curve and the predictions obtained using the Mualem-van Genuchten model from RETC code using input data as described in the text. (Dots – experimental data; full line – 1st scenario; dashed line – Type I; dotted line – Type II.)

More specifically, better improvement in the prediction of $K(\theta)$ was observed in the case of Type II (logarithmically transformed conductivity) compared with both Type I (untransformed conductivity values) and the first scenario (Figure 3). This is also demonstrated in the RMSE values presented in Table 2. There is a decrease in the RMSE values indicating the abovementioned improvement. This effect is more pronounced for Type II.

Similar results were presented by Yates *et al.* (1992) which recommended that the logarithmically transformed values should be used since they better describe the conductivity across the entire range of observed values.

However, the cost of this improvement is a poorer characterization of $\theta(h)$ relationship. Although Type II of conductivity regression analysis accurately describe $K(\theta)$, it reduces the predictive accuracy of $\theta(h)$ compared

Table 2 | RMSE from comparing experimental and predicted values of water content, θ , and unsaturated hydraulic conductivity, K , for all prediction scenarios

| Porous medium | RETC | RMSE θ ($\text{cm}^3 \text{cm}^{-3}$) | RMSE K (cm min^{-1}) |
|-----------------|---------|--|-----------------------------------|
| Sand | | 1st scenario | |
| | | 0.0073 | 0.4802 |
| | Type I | 0.0083 | 0.4490 |
| | Type II | 0.0244 | 0.2424 |
| Sandy loam | | 1st scenario | |
| | | 0.0093 | 0.5324 |
| | Type I | 0.0167 | 0.1371 |
| | Type II | 0.0169 | 0.0390 |
| Loam | | 1st scenario | |
| | | 0.0091 | 0.2807 |
| | Type I | 0.0091 | 0.2294 |
| | Type II | 0.0105 | 0.0736 |
| Silty clay loam | | 1st scenario | |
| | | 0.0023 | 0.6936 |
| | Type I | 0.0056 | 0.1212 |
| | Type II | 0.0068 | 0.0385 |
| Clay loam | | 1st scenario | |
| | | 0.0060 | 1.6694 |
| | Type I | 0.0394 | 0.3185 |
| | Type II | 0.0258 | 0.1082 |
| Clay | | 1st scenario | |
| | | 0.0047 | 0.4132 |
| | Type I | 0.0340 | 0.5419 |
| | Type II | 0.0081 | 0.0507 |

with the first prediction scenario for all porous media studied. This can also be seen from the results in Table 2 where, for the water content, there is an increase in RMSE values.

In order to remove this weakness, we investigated the case of increasing the model fitting parameters. We studied the Mualem model parameter p as an additional fitting parameter using RETC for Type II. As shown in Table 3, the fitting parameter p , in all porous media studied, had values with remarkable deviation from the conventional value of 0.5 ranging from -0.591 to 2.622 resulting from RETC code analysis. Similar behavior has also been noticed by other researchers (Leij *et al.* 1992; Yates *et al.* 1992; Kargas & Londra 2015).

Taking into consideration the RMSE values shown in Table 3, it appears that Type II method with four fitting

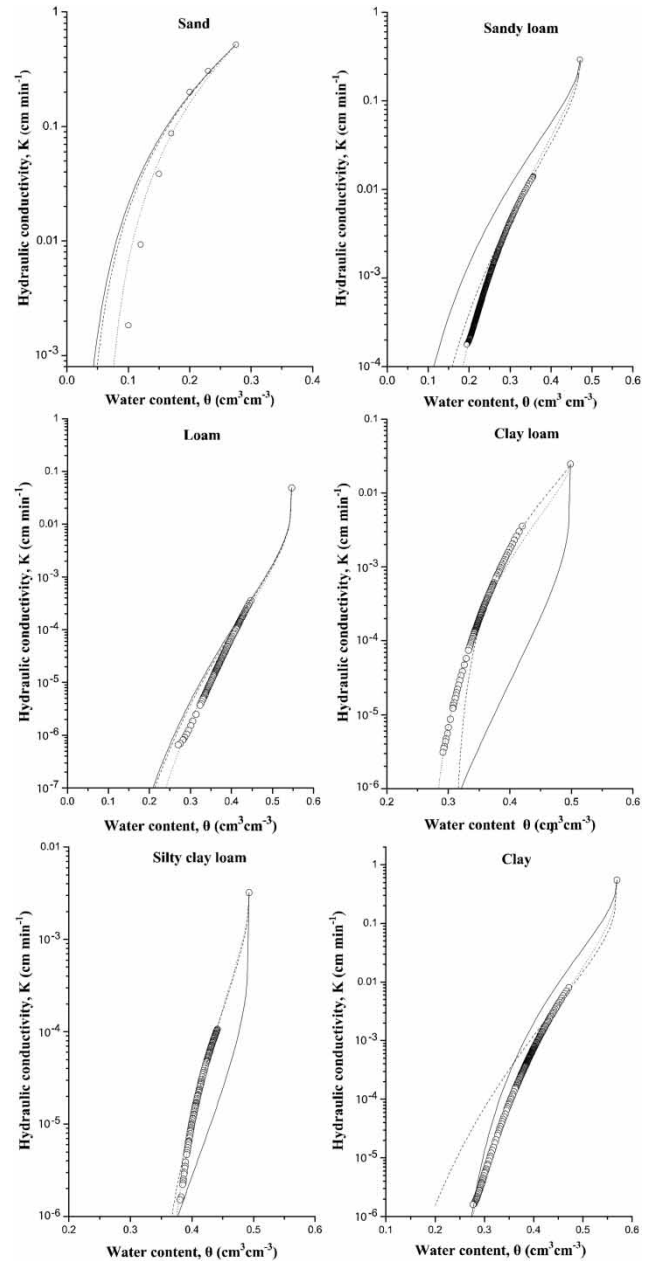


Figure 3 | $K(\theta)$ values from experimental one-step outflow data and the prediction values obtained by the Mualem-van Genuchten model from RETC code using input data as described in the text. (dots – $K(\theta)$ from experimental one-step outflow data; full line – 1st scenario; dashed line – Type I; dotted line – Type II).

parameters compared with the corresponding one with three fitting parameters provides an improvement in the description of the water retention curve for all porous media studied (except clay soil). On the other hand, increasing of fitting parameters provides an improvement (lower RMSE values) of hydraulic conductivity or leads

Table 3 | The Mualem-van Genuchten fitting parameters α , n , θ_r , p obtained by RETC code using as input data simultaneously the experimental values of $\theta(h)$, K_s and $K(\theta)$ from experimental one-step outflow data for Type II conductivity regression analysis (logarithmically-transformed conductivity)

| Porous medium | α (cm ⁻¹) | n (-) | θ_r (cm ³ ·cm ⁻³) | p (-) | RMSE θ (cm ³ cm ⁻³) | RMSE K (cm min ⁻¹) |
|-----------------|------------------------------|---------|---|---------|---|----------------------------------|
| Sand | 0.029 | 15.213 | 0.025 | 1.915 | 0.0078 | 0.1800 |
| Sandy loam | 0.0197 | 1.981 | 0.017 | 2.491 | 0.0092 | 0.0246 |
| Loam | 0.012 | 1.2796 | 0.010 | 2.622 | 0.0094 | 0.0622 |
| Silty clay loam | 0.012 | 1.763 | 0.323 | 0.814 | 0.0065 | 0.0397 |
| Clay loam | 0.037 | 2.022 | 0.268 | -0.591 | 0.0202 | 0.1278 |
| Clay | 0.132 | 1.400 | 0.195 | 0.0001 | 0.0107 | 0.0577 |

to similar results to those obtained by Type II with three fitting parameters.

Similar results were obtained by Yates *et al.* (1992) when they applied two prediction scenarios using as input data: (i) the experimental values of $\theta(h)$ and K_s with four fitting parameters, and (ii) simultaneously the experimental values of $\theta(h)$ and $K(\theta)$ for the two types of conductivity regression analysis (logarithmically transformed conductivity–untransformed conductivity) with five or six fitting parameters. More specifically, the simultaneous method with five or six parameters was found to be better, but there were only minor differences between two types of simultaneous methods.

Additionally, from the results we can reasonably assume that the use of RETC using simultaneously experimental $\theta(h)$ and $K(\theta)$ data from outflow measurements using the Valiantzas *et al.* (2007) equation for Type II conductivity regression analysis, may improve the description of the $K(\theta)$ near saturation. In this way, the weakness of one-step outflow method predicting $K(\theta)$ at saturation may be overcome. This approach seems to be especially suited for large-scale studies that require realistic simulations in the wet region, e.g. during infiltration into soils.

CONCLUSIONS

In six porous media with different soil texture, two basic hydraulic properties, water retention curve and hydraulic conductivity were determined on the same sample using an easy and fast methodology. The experimental $K(\theta)$ values obtained by one-step outflow data were compared with those predicted by the Mualem-van Genuchten model using

RETC code for two prediction scenarios with three fitting parameters α , n , θ_r and two types of conductivity regression analysis (Type I, untransformed conductivity; Type II, logarithmically transformed conductivity). From the results of this group of soils, it appears that the first scenario using only the experimental $\theta(h)$ and K_s values supplies soil hydraulic parameters that provide an adequate description of $\theta(h)$ relationships compared to the other methods studied. However, this scenario is unable to adequately predict $K(\theta)$ relationships. In the case where RETC with input data the experimental $\theta(h)$, $K(\theta)$ and K_s values for Type II was used, the obtained $K(\theta)$ predictions were in very good agreement with experimental values. However, this method causes a decreasing agreement between experimental and predicted $\theta(h)$ relationship compared with the method of the first prediction scenario. The best method for predicting both the $\theta(h)$ and $K(\theta)$ relationships, for this group of soils, is to use Type II regression analysis with p as an additional fitting parameter compared to the other methods examined. Overall, the combination of RETC with the one-step outflow method is a powerful tool which may be used successfully as a routine procedure for the determination of $K(\theta)$ even in the case of $K(\theta)$ values near saturation.

REFERENCES

- Arrey, I. A., Odiyo, J. O., Makungo, R. & Kataka, M. O. 2018 *Effect of hysteresis on water flow in the vadose zone under natural boundary conditions, Siloam Village case study, South Africa*. *Journal of Hydroinformatics* **20**, 88–99. doi:10.2166/hydro.2017.091.
- Bitterlich, S., Durner, W., Iden, S. C. & Knabner, P. 2004 *Inverse estimation of the unsaturated soil hydraulic properties from column outflow experiments using free-form parameterizations*. *Vadose Zone Journal* **3**, 971–981.

- Bordoni, M., Bittelli, M., Valentino, R., Shersich, S. & Meisina, C. 2017 Improving the estimation of complete field soil water characteristic curves through field monitoring data. *Journal of Hydrology* **552**, 283–305.
- Bourazanis, G., Londra, P., Kargas, G., Argyrokastritis, I. & Kerkides, P. 2016 Evaluation of porous medium hydraulic properties using experimental methods and RETC code. *Archives of Agronomy and Soil Science* **62**, 1147–1157.
- Brooks, R. H. & Corey, A. T. 1964 *Hydraulic Properties of Porous Media*. Hydrology Paper No. 3, Civil Engineering Department, Colorado State University, Fort Collins, CO.
- Burdine, N. T. 1953 Relative permeability calculations from pore-size distribution data. *Petr. Trans., Am. Inst. Mining Metall. Eng.* **198**, 71–77.
- Childs, E. C. & Collis-George, N. 1950 The permeability of porous materials. *Proc. Roy. Soc. London, Ser. A* **201**, 392–405.
- Doering, E. J. 1965 Soil water diffusivity by the one-step method. *Soil Science* **99**, 322–326.
- Ghazanfari, S., Pande, S., Cheema, M. J. M., Alizadeh, A. & Farid, A. 2016 The role of soil moisture accounting in estimation of soil evaporation and transpiration. *Journal of Hydroinformatics* **18**, 329–344.
- Haines, W. B. 1930 Studies in the physical properties of soils. V. The hysteresis effect in capillary properties and the modes of moisture distribution associated therewith. *Journal of Agricultural Science* **20**, 97–116.
- Kargas, G. & Londra, P. A. 2015 Effect of tillage practices on the hydraulic properties of a loamy soil. *Desalination and Water Treatment* **54**, 2138–2146.
- Klute, A. & Dirksen, C. 1986 *Methods of Soil Analysis*. Part 1, 2nd edition Agron. Monogr. 9, ASA and SSSA, Madison, WI, pp. 687–734.
- Leij, F. J., van Genuchten, M. Th., Yates, S. R., Russell, W. B. & Kaveh, F. 1992 RETC: A computer program for analyzing soil water retention and hydraulic conductivity data. In: *Proc. Int. Workshop on Indirect Methods for Estimating the Hydraulic Properties of Unsaturated Soils* (M. Th. van Genuchten, F. J. Leij & L. J. Lund, eds). University of California, Riverside, CA, pp. 263–272.
- Londra, P. A. 2010 Simultaneous determination of water retention curve and unsaturated hydraulic conductivity of substrates using a steady-state laboratory method. *HortScience* **45**, 1106–1112.
- Londra, P. A. & Valiantzas, J. D. 2011 Soil water diffusivity determination using a new two-point outflow method. *Soil Science Society of America Journal* **75**, 1343–1346.
- Mualem, Y. 1976 A new model for predicting the hydraulic conductivity of unsaturated porous media. *Water Resources Research* **12**, 513–522.
- Parker, J. C., Kool, J. B. & van Genuchten, M. Th. 1985 Determining soil hydraulic properties from one-step outflow experiments by parameter estimation: II. Experimental studies. *Soil Science Society of America Journal* **49**, 1354–1359.
- Passioura, J. B. 1976 Determining soil water diffusivities from one step outflow experiments. *Australian Journal of Soil Research* **15**, 1–8.
- Schaap, M. G. & van Genuchten, M. Th. 2006 A modified Mualem-van Genuchten formulation for improved description of the hydraulic conductivity near saturation. *Vadose Zone Journal* **5**, 27–34.
- Siltecho, S., Hammecher, C., Sriboonlue, V., Clermont-Dauphin, C., Treloges, V., Antonino, A. C. D. & Angulo-Jaramillo, R. 2015 Use of field and laboratory methods for estimating unsaturated hydraulic properties under different land uses. *Hydrology and Earth System Sciences* **19**, 1193–1207.
- Stolte, J., Freijer, J. I., Bouten, W., Dirksen, C., Halbertsma, J. M., Van Dam, J. C., Van den Berg, J. A., Veerman, G. J. & Wosten, J. H. M. 1994 Comparison of six methods to determine unsaturated soil hydraulic conductivity. *Soil Science Society of America Journal* **58**, 1596–1603.
- Talsma, T. 1985 Prediction of hydraulic conductivity from soil water retention data. *Soil Science* **140**, 184–188.
- Valiantzas, J. D. 1989 A simple approximate equation to calculate diffusivities from one-step outflow experiments. *Soil Science Society of America Journal* **53**, 342–349.
- Valiantzas, J. D., Londra, P. & Salsalou, A. 2007 Explicit formulae for the soil water diffusivity using the one-step outflow technique. *Soil Science Society of America Journal* **71**, 1685–1693.
- van Dam, J. C., Stricker, J. N. M. & Droogers, P. 1992 Inverse method for determining soil hydraulic functions from one-step outflow experiments. *Soil Science Society of America Journal* **56**, 1042–1050.
- van Genuchten, M. Th. 1980 A closed-form equation for predicting the hydraulic conductivity of unsaturated soils. *Soil Science Society of America Journal* **44**, 892–898.
- van Genuchten, M. Th. & Leij, F. J. 1992 On estimating the hydraulic properties of unsaturated soils. In: *Proc. Int. Workshop on Indirect Methods for Estimating the Hydraulic Properties of Unsaturated Soils* (M. Th. van Genuchten, F. J. Leij & L. J. Lund, eds). University of California, Riverside, CA, pp. 1–14.
- van Genuchten, M. Th., Leij, F. J. & Yates, S. R. 1991 *The RETC Code for Quantifying the Hydraulic Functions of Unsaturated Soils*. USDA, Riverside, California.
- Yates, S. R., van Genuchten, M. Th., Warick, A. W. & Leij, F. J. 1992 Analysis of measured, predicted and estimated hydraulic conductivity using the RETC program. *Soil Science Society of America Journal* **56**, 347–354.

First received 7 November 2017; accepted in revised form 5 January 2018. Available online 14 February 2018