

Effects of environmental factors on the methane and carbon dioxide fluxes at the middle of Three Gorges Reservoir

Yu Qin*, Yujia Gou, Zongtai Yu and Wei Tan

Key Laboratory of Hydraulic and Waterway Engineering of the Ministry of Education, Chongqing Jiaotong University, 400074 Chongqing, China

*Corresponding author. E-mail: qinyu54001@163.com

ABSTRACT

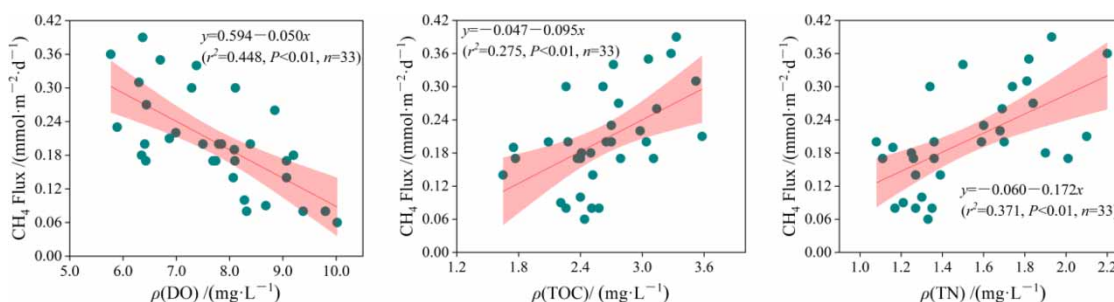
In recent years, scientists have paid special attention to the greenhouse gas emissions of the Three Gorges Reservoir. This study took Fuling to Wanzhou, located at the middle section of the Three Gorges Reservoir, as the research locations. From August 2017 to August 2018, the partial pressure of carbon dioxide (CO₂) and methane (CH₄) and the flux of CO₂ and CH₄ at the water–gas interface were studied. Spearman's correlation between the partial pressure and discharge flux of CO₂ and CH₄ in water and environmental variables was analyzed. The research results showed that the variation of partial pressure and flux was consistent. At different sample locations, there was no statistical difference in CO₂ and CH₄ fluxes, but under different operating periods, the CO₂ and CH₄ fluxes were significantly different. The highest values happened during the drainage period as well as the low-water period, respectively. Total organic carbon and total nitrogen were significantly positively correlated, and dissolved oxygen was extremely negatively correlated. The high value of CH₄ flux in the middle of the reservoir area was related to the spatial distribution of the sediment and the amount of sediment deposition.

Key words: GHG flux, influencing factors, middle section of reservoir area, sediment deposition, surface waters, Three Gorges Reservoir

HIGHLIGHTS

- This paper focuses on the greenhouse gas change in the middle section of the Three Gorges Reservoir area, which has received relatively little attention at present.
- The research time span of this paper is long, and the analysis of greenhouse gas (GHG) is comprehensive.

GRAPHICAL ABSTRACT



1. INTRODUCTION

The study of greenhouse gas (GHG) source and sink changes in reservoirs has been an interdisciplinary frontier and hotspot in the field of global river ecological environment research and water conservancy and hydropower engineering in the past 20 years (Abril *et al.* 2014; Sawakuchi *et al.* 2014). According to some studies, reservoirs emit about 70 million tons of methane (CH₄) and 100 million tons of carbon dioxide (CO₂) every year, and reservoirs have become an important source of GHG in the atmosphere; what is more, the amount of CH₄ released from reservoirs accounts for 20% of the total CH₄ emissions from human activities (McCully 2002). The infrared absorption function of CH₄ molecule is stronger than that of CO₂, which

This is an Open Access article distributed under the terms of the Creative Commons Attribution Licence (CC BY-NC-ND 4.0), which permits copying and redistribution for non-commercial purposes with no derivatives, provided the original work is properly cited (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

makes the global warming efficiency of CH₄ 20–32 times that of CO₂ (Rodhe 1990; Lemer & Roger 2001), and plays an important role in global warming. At present, the preliminary consensus is that the reservoir will have a high GHG flux in the initial 10–20 years and gradually stabilize after 20 years (Tremblay *et al.* 2004). Therefore, the main factors affecting the change of GHG source and sink of reservoirs are the age of reservoirs and the climate zone of reservoirs (Barros *et al.* 2011; Kumar *et al.* 2019). At the same time, the differences in rainfall, air temperature, wind speed and relative humidity among the crops on the two sides verified by the SAWT model also have indirect effects on the reservoir (Dash *et al.* 2021).

Dissolved oxygen (DO), chlorophyll concentration, temperature, surface water temperature, salinity and turbidity are known as water quality variables (Shamshirband *et al.* 2019). According to the existing studies, the release form of carbon is mainly CO₂ in the case of abundant oxygen in water, while the form is mainly CH₄ and CO₂ in the case of anoxic or anaerobic conditions. Therefore, an important indirect factor in the production, diffusion and release of GHG is the concentration of DO in water. In the tropical reservoirs, part of CH₄ generated in sediments rose to the water surface through diffusion (Rosa *et al.* 2003). However, due to the gradual increase in the concentration of DO in the rising process, most of the CH₄ was oxidized to CO₂ by CH₄-oxidizing bacteria on the anaerobic–aerobic critical surface. As a result, the CH₄ release from the water–gas interface was significantly reduced, while the CO₂ release was increased. Changes in concentrations of C and N in water also affect the primary productivity of aquatic plants and the metabolic process of plankton, and the concentration of pollutants changes along the river, thus indirectly affecting the concentrations of CO₂ and CH₄ in water and the release fluxes of CO₂ and CH₄ at the water–air interface (Yang *et al.* 2013; Kargar *et al.* 2020).

After the completion of the Three Gorges Reservoir, several kilometers to tens of kilometers of river water were inundated to form slow or still water reaches in the lower reaches of the mainstream and tributaries of the Yangtze River, and river water was significantly reduced in the tributaries. The original diversified and fast-flowing river system disappeared, and a complex lake–river system with slow or even stationary water flow appeared (Nilsson & Berggren 2000). It is worth noting that the Three Gorges Reservoir is a typical channel canyon reservoir. After the establishment of the reservoir, the water level of the natural channel increases, and the flow velocity gradually slows down. The changes of the natural river hydrodynamic environment brought about by the construction of the dam and the water impoundment process also lead to the accumulation of sediment in the reservoir with the increase of the operating years. While the self-purification capacity of water body is weakened, for the river–lake transitional water body, the carbon which is from biogeographic transformation and GHG source and sink in the reservoir also presents transition and high heterogeneity in time and space (Morales-Pineda *et al.* 2014). For example, in the river area at the tail of the reservoir, the reservoir mainly degrades carbon from different sources because the upstream river has more organic matter from different sources. However, in the lake area at the head of the reservoir, due to the decrease of flow rate, the enhancement of light transmittance and the growth of algae, the reservoir mainly presents the process of endogenous carbon synthesis. The differences described above will, to some extent, lead to gradient changes in the source and sink of GHG in reservoirs in time and space (Li 2018; Li *et al.* 2018b). In the past 10 years, many teams in China have been monitoring and analyzing GHG and reservoir carbon cycle in the Three Gorges Reservoir (Li *et al.* 2016a; Liu *et al.* 2017; Li 2018). The main views are as follows: (1) The GHG source and sink volume of the water body in the Three Gorges Reservoir does not have the characteristics of high release flux as previously reported. On the contrary, it is at a low level in the global case base (Li *et al.* 2018b). (2) The mainstream of the Three Gorges Reservoir mainly degrades substances of different sources, while the algae growth in the backwater area of tributaries may present a local carbon sink phenomenon (Qin *et al.* 2017a).

At present, there are few reports on the characteristics and influencing factors of GHG sources and sinks in the middle section of the Three Gorges Reservoir. The middle section of the Three Gorges Reservoir (Fuling–Wanzhou section), as a transition section from ‘fluvial facies’ to ‘lacustrine facies’, is different from rivers and lakes in terms of channel characteristics (‘S’ type) (Li *et al.* 2016b), habitat characteristics, ecological structure and function, and key source factors (Li *et al.* 2018b). In addition, the current literature reports mainly focus on the macro characteristics of reservoir GHG sources and sinks, and the relevant literature reports focus on the spatial heterogeneity of reservoir GHG and its influencing factors are still limited. Therefore, the study of the typical sections of the Three Gorges Reservoir can effectively improve the understanding of GHG emissions in the reservoir ecosystem and clarify its impact on the global carbon cycle, which is of self-evident importance. In the preliminary investigation, the gas concentration in the water body of the Three Gorges Reservoir was initially tracked and monitored. The study found that the highest concentration of GHG in the water body appeared in the middle section of the reservoir, and there was no significant change in the concentration along with the depth of the river. It is preliminarily judged that this characteristic is related to the spatial distribution of sediment deposition in the mainstream of the

Three Gorges Reservoir to some extent and may be affected by the operation of the reservoir ‘storing clear water and discharging muddy water’ (Maeck *et al.* 2013).

Therefore, this study selected three typical sections of Fuling (FL), Zhongxian (ZX) and Wanzhou (WZ), which are in the middle section of the Three Gorges Reservoir, as the objects to carry out a 1-year *in situ* monitoring experiment. Combined with environmental factors such as meteorological and climatic conditions, the study revealed the main factors affecting the change of GHG source and sink in the middle section of the Three Gorges Reservoir. This study provides theoretical and data support for further study of GHG effects of the reservoir and provides a basis for further revealing the biogeochemical process of GHG source and sink changes in the middle section of the Three Gorges Reservoir under the operation of the reservoir.

2. MATERIALS AND METHODS

2.1. Study site

The length of the Three Gorges Reservoir is about 663 km. The average water surface width of the mainstream reservoir section is 1,100 m, and the water area is about 1,084 km² (Li *et al.* 2013; Luo *et al.* 2018). According to the operational plan of the Three Gorges Project about ‘storing clear and releasing muddy’, the water level of the reservoir will be lowered to 145 m before the flood season begins at the end of June and gradually be increased to 175 m after the flood season ends at the end of September. The range is between 145 and 175 m. The drainage period is from February to May, while the low-water-level operation period is from June to September, and from October of each year to January of next year is the period of impoundment and high-water-level operation (short for ‘high-water-level period’). When the water level is at a low running stage, the backwater of the mainstream reaches the downstream of Chongqing Longevity area, 524 km away from the leading edge of the dam, which is called the ‘perennial backwater area’ (Li *et al.* 2015a).

In the preliminary investigation, our team tracked and monitored the gas concentration in the water body of the Three Gorges Reservoir. The study found that the highest concentration of GHG in the water body appeared in the middle section of the reservoir (Wanzhou–Fuling section), and there was no significant change in the concentration along the depth of the river (Figure 1). Based on the above analysis, in this study, we chose three sections, Fuling (FL), Zhongxian (ZX) and Wanzhou (WZ), as key research areas in the ‘perennial backwater area’ mentioned to carry out *in situ* observation for 1 year.

FL, which is located in the middle of Chongqing and located at the conjunctions of the Yangtze River and the Wujiang River, is 120 km from Chongqing above and 482 km from the Three Gorges Dam below. This reach, with a flow of 86 km and an average annual flow of about 11,200 m³/s, is a typical mountainous river course in the upper reaches of the Yangtze River. The annual runoff distribution of this reach is extremely uneven, with an average flow of 1,050 m³/s from June to October in the flood season, and its runoff accounts for 74.5% of the annual runoff.

ZX, 190 km above Chongqing and 386 km below the Three Gorges Dam on the Yangtze River, is located in the eastern and central part of Chongqing. The reach is flat and wide, with a uniform flow of 88 km and an average annual flow of about 12,400 m³/s.

WZ, located in the northeast of Chongqing, is a central city in the upper reaches of the Yangtze River. It is 328 km from Chongqing and 283 km from the Three Gorges Dam. This reach is a stable section of large mountain rivers, with a relatively straight course of 84.3 km and an average annual flow of about 13,700 m³/s.

The data obtained by the study will be divided according to the above three water-level running periods to analyze the changes of GHG flux source and sink in the Three Gorges Reservoir section. Total amount of water will influence the

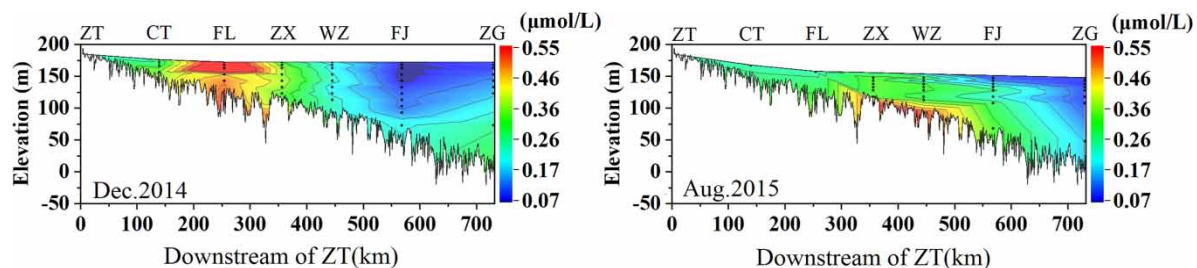


Figure 1 | Concentration distribution of CH₄ in water of the Three Gorges Reservoir (Li *et al.* 2020).

turbidity of the reservoir (Alizadeh *et al.* 2018). From August 2017 to August 2018, the water level changes during the study period of the Three Gorges Reservoir (Figure 2) (source: <https://www.ctg.com.cn/sxjt/sqkq/index.html>).

2.2. Sampling and analysis

From August 2017 to August 2018, this study conducted monthly monitoring and analysis on three sampling sites for a period of 12 months. The monitoring time of all sampling sites was controlled from 20th to 22nd of each month. Massive amounts of GHG gathering research will be at 9:00–11:00 (Wu 2016) as the representative of the flux of the day time, Wu (2012) to choose 9:00–11:00 in the morning in the Three Gorges Reservoir with monitoring, Zhao *et al.* (2011) monitored GHG emissions in the Xiangxi River Basin of the Three Gorges Reservoir from 9:00 to 14:00. Due to spatiotemporal differences in GHG fluxes, GHG fluxes at the same point and at different times will also change. To obtain more accurate data, the sampling time of this study is as much as possible controlled at 9:00–11.00 am. The sampling tool is a 5-L water sampler to collect the 0.5 m surface water of the above three sections, respectively (Gong *et al.* 2019; Liu *et al.* 2019), the water samples will be sent back to the laboratory immediately on the same day, all the test and analysis work will be completed within 48 h, and the relevant water environmental indicators and the characteristics of GHG flux at the water–air interface will be monitored simultaneously.

At present, there are two commonly used methods for monitoring the gas emission flux at the water–gas interface: one is static chamber method – gas chromatography; the other is the combination of headspace balance method – gas chromatography and thin boundary layer (TBL) model estimation method. Static box-gas chromatography is usually only able to obtain flux data at points, with high labor intensity and high cost of gas analysis, which makes it unsuitable for large area and long-term observation. Therefore, static box-gas chromatography is only suitable for the observation of static water bodies (Tremblay *et al.* 2005). However, the model estimation method is most commonly used in field monitoring due to its simplicity, flexibility and easy operation (Qin *et al.* 2017b). Considering the strong fluidity of the water body, the long distance between sampling points, the long duration of monitoring and the poor geographical and climatic conditions of the points, the feasibility of the static box method is weak. In addition, due to the disturbance of water outside the box, the flux data obtained by the static box method is relatively discrete. The comparative experiment shows that the flux results obtained by the TBL estimation method are generally more stable than the former method (Yao *et al.* 2015). Therefore, in this study, the GHG flux at the water–gas interface in the middle section of the Three Gorges Reservoir was obtained by using the headspace balance TBL model estimation method.

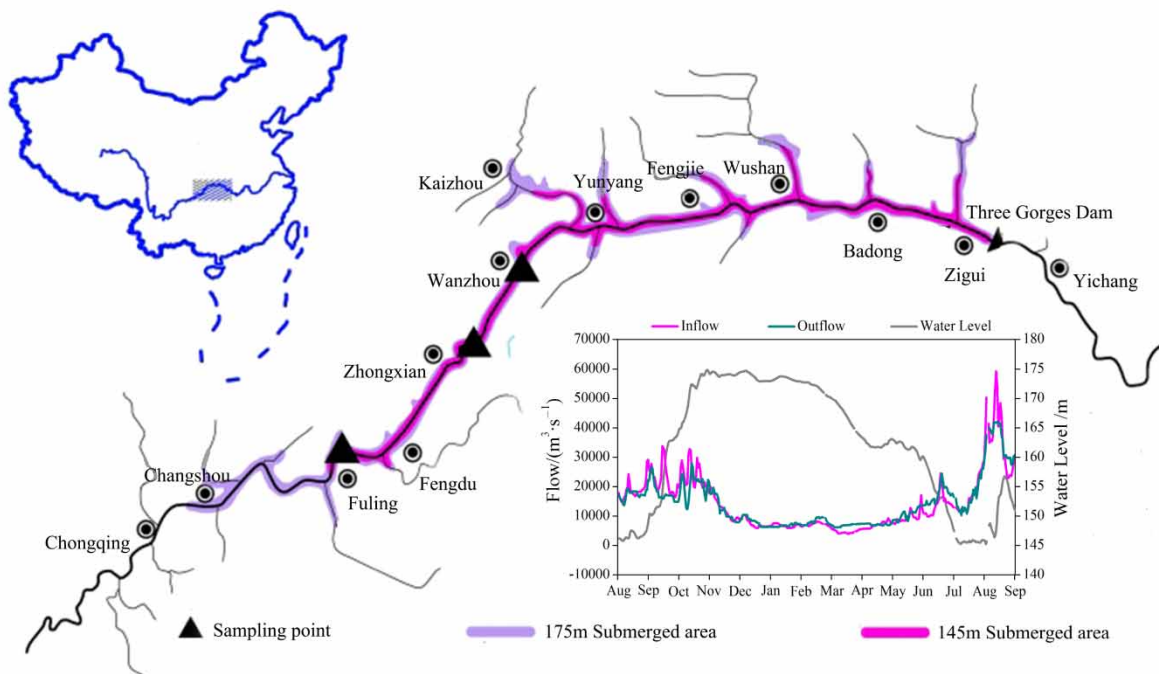


Figure 2 | Sampling point and flow water-level map of the Three Gorges Reservoir; sample list is showed in Table 1.

Table 1 | Basic information of the sampling sites

Sample sites	Location
FL	29°48'00"N, 107°27'00"E
ZX	30°24'57.63"N, 108°12'40.86"E
WZ	30°46'26.66"N, 108°24'46.74"E

At the sampling place, the headspace bottle is placed in a water collector filled with water and sealed in a completely submerged state. It is confirmed that there is no bubble in the headspace, put it upside down and send it back to the laboratory for analysis. The bottle is sealed in a completely submerged state. At the same time, it is confirmed that there is no bubble in the head empty bottle, it is placed upside down, and sent back to the laboratory for analysis. After the headspace bottle filled with water sample is taken out, two injection needles are inserted into the headspace bottle at the same time at room temperature, to the headspace bottle injection of 5 mL of high-purity nitrogen mechanical shock after 20 min, after waiting for two phase of water–gas balance to extract the upper air bottle, into an agilent7820A gas chromatograph, after TDX-01 chromatographic column separation in an Ni catalyst with a FID detector test, after obtaining the CO₂ and CH₄ concentration, Equation (1) is plugged in, to get water samples under test of CO₂ and CH₄ partial pressure (Kolb & Ettre 2006), the specific method to calculate the GHG see literature (Qin *et al.* 2017b):

$$P(\text{Gas}) = \frac{(P_{\text{final}} \times K_{\text{equilibrium}}) + \left(\left(\text{HS}/S \right) \times \frac{(P_{\text{final}} - P_{\text{initial}})}{V_m} \right)}{K_{\text{sample}}} \quad (1)$$

where $P(\text{Gas})$ is the gas partial pressure in the water sample to be measured, μatm ; P_{initial} and P_{final} are the partial pressure of the gas to be measured in the air above the bottle before and after equilibrium, μatm ; HS/S is the volume ratio of the gas in the bottle to the water; K_{sample} and $K_{\text{equilibrium}}$ are the corresponding solubility of the gas to be measured at the time of sampling and water temperature in the bottle before sample analysis, respectively, $\text{mol}\cdot\text{L}^{-1}\cdot\text{atm}^{-1}$; V_m is the mole of the gas volume, $\text{mol}\cdot\text{L}^{-1}$; the unit of partial pressure is uniformly converted into Pa, $1 \mu\text{atm} = 0.101325 \text{ Pa}$.

According to Fick's law (Rantakari *et al.* 2015), for freshwater, the gas exchange flux at the water–air interface can be calculated by the following equation:

$$\text{Flux} = k_x(C_{\text{water}} - C_{\text{air}}) \quad (2)$$

where Flux is the GHG diffusion flux, $\text{mmol}\cdot\text{m}^{-2}\cdot\text{d}^{-1}$; k_x is the gas exchange coefficient, $\text{cm}\cdot\text{h}^{-1}$; C_{water} is the GHG concentration in water, $\mu\text{mol}\cdot\text{L}^{-1}$; C_{air} is the GHG concentration in the atmosphere, $\mu\text{mol}\cdot\text{L}^{-1}$.

For the gas exchange coefficient k_x , the empirical model formula (Rik 1992) is adopted, the instantaneous wind speed (U_1) above the water surface measured in the field is used and the wind speed at 10 m above the water surface (U_{10}) is converted according to the following equation:

$$U_{10} = 1.22 \times U_1 \quad (3)$$

At the sampling place, the water temperature and DO were measured by YSI® Pro ODO (the accuracy of 0.1 °C, 0.01 $\text{mg}\cdot\text{L}^{-1}$, respectively); the pH value was measured by the multi-parameter water quality analyzer HACH® MS5 (the accuracy of 0.01); the instantaneous wind speed above the water surface was measured by AR-826 anemometer (the accuracy was 0.01 $\text{m}\cdot\text{s}^{-1}$); the temperature was measured by the thermometer on site (the accuracy was 0.1 °C); the atmospheric pressure is measured by a barometer on site (with an accuracy of 0.01 bpa); the field measuring instruments have passed the standard calibration procedures before sampling; and at the end of the sampling field test, the water samples from each section are taken back to the laboratory to complete the analysis and testing of other indicators, including total organic carbon (TOC) and total nitrogen (TN), within 48 h (Yang & Lv 2016). Inside the TOC was determined by Whatman GF/F glass fiber

filter membrane, which was dried at 450 °C for 4 h, and the TN was determined by alkaline potassium persulfate oxidation ultraviolet spectrophotometry.

2.3. Data analysis method

In this study, all the experimental and calculated data were entered into SPSS[®] or Origin[®] for statistical analysis, and one-way ANOVA was used to explain the differences of the data in different periods and spaces. Spearman's correlation analysis was used to analyze the correlation between CO₂ and CH₄ concentration and various environmental factors (DO, TOC and TN), or Origin was used for linear regression analysis, indicating the linear correlation between data changes. There are also Pearson's correlation analysis methods for correlation analysis, but Spearman's analysis is more suitable and more accurate because GHGs belong to non-normal distribution. Pearson's correlation analysis is more suitable for data with normal distribution (Dash *et al.* 2019).

3. RESULTS AND DISCUSSION

3.1. Results

3.1.1. Changes of CO₂ partial pressure in water and flux at the water-air interface

As shown in Figure 3, the average annual partial pressure of CO₂ in the middle of the Three Gorges Reservoir is 155.8 ± 38.2 Pa. The average annual partial pressure of CO₂ at FL point was 148.8 ± 34.3 Pa, reaching its maximum value in May of the next year; the average annual partial pressure of CO₂ at ZX point was 157.5 ± 38.3 Pa, reaching its maximum value in April of the next year; and the average annual partial pressure of CO₂ at WZ point was 161.2 ± 40.7 Pa, reaching its maximum value in April of the next year. The monthly changes of FL, ZX and WZ were similar. There was no significant difference in CO₂ partial pressure at each point (ANOVA, $P > 0.05$). The mean partial pressures of CO₂ in the high-water

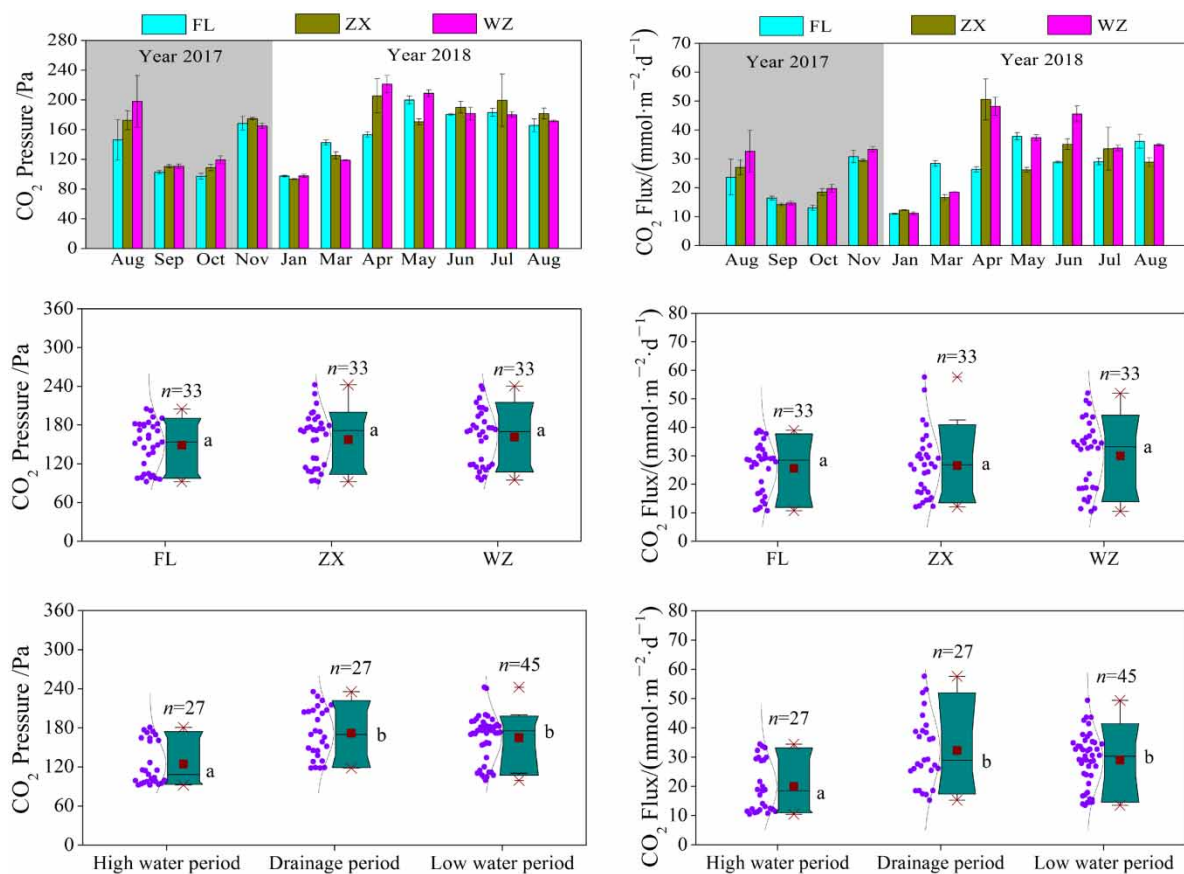


Figure 3 | CO₂ partial pressure of water and CO₂ flux at the water-air interface. (Note: a and b indicate differences between groups.)

stage, drainage stage and low-water stage were 124.6 ± 32.5 , 171.8 ± 36.3 and 165.1 ± 31.1 Pa, respectively. Under different operating conditions, the partial pressure of CO_2 changed significantly (ANOVA, $P = 0.03 < 0.05$), and the drainage stage and the low-water stage were significantly higher than the high-water stage.

The average annual CO_2 flux in the middle of Three Gorges Reservoir is $27.4 \pm 10.8 \text{ mmol}\cdot\text{m}^{-2}\cdot\text{d}^{-1}$. The average annual CO_2 flux at FL point was $25.6 \pm 8.6 \text{ mmol}\cdot\text{m}^{-2}\cdot\text{d}^{-1}$, reaching its maximum value in May of the following year; the average annual CO_2 flux at ZX point was $26.6 \pm 11.0 \text{ mmol}\cdot\text{m}^{-2}\cdot\text{d}^{-1}$, reaching its maximum value in April of the next year; and the average annual CO_2 flux at WZ point was $30.0 \pm 11.9 \text{ mmol}\cdot\text{m}^{-2}\cdot\text{d}^{-1}$, reaching its maximum value in April of the next year. The annual CO_2 flux is positive, which is the ‘source’ of atmospheric CO_2 . The monthly changes of FL, ZX and WZ were similar. There was no significant difference in CO_2 flux at each point (ANOVA, $P > 0.05$). The average CO_2 fluxes were 19.9 ± 8.5 , 32.2 ± 11.6 and $28.9 \pm 9.0 \text{ mmol}\cdot\text{m}^{-2}\cdot\text{d}^{-1}$ in high-water stage, discharge period and low-water stage, respectively. Under the conditions of different operating periods, CO_2 flux changes significantly (ANOVA, $P = 0.03 < 0.05$), and the drainage stage and low-water stage are significantly higher than the high-water stage, which are similar laws to the partial pressure of CO_2 .

3.1.2. Changes of CH_4 partial pressure in water and flux at the water–air interface

As shown in Figure 4, the average annual CH_4 partial pressure in the middle period of the Three Gorges Reservoir is 21.7 ± 8.4 Pa. The average annual CH_4 partial pressure at FL point was 18.6 ± 4.9 Pa, reaching its maximum value in May of the next year; the average annual CH_4 partial pressure at ZX point was 23.8 ± 9.3 Pa, reaching its maximum value in August; and the average annual CH_4 partial pressure at WZ point was 22.7 ± 9.4 Pa, reaching its maximum value in August of the next year. There was no statistical difference in CH_4 partial pressure at each point (ANOVA, $P > 0.05$). The mean CH_4 partial

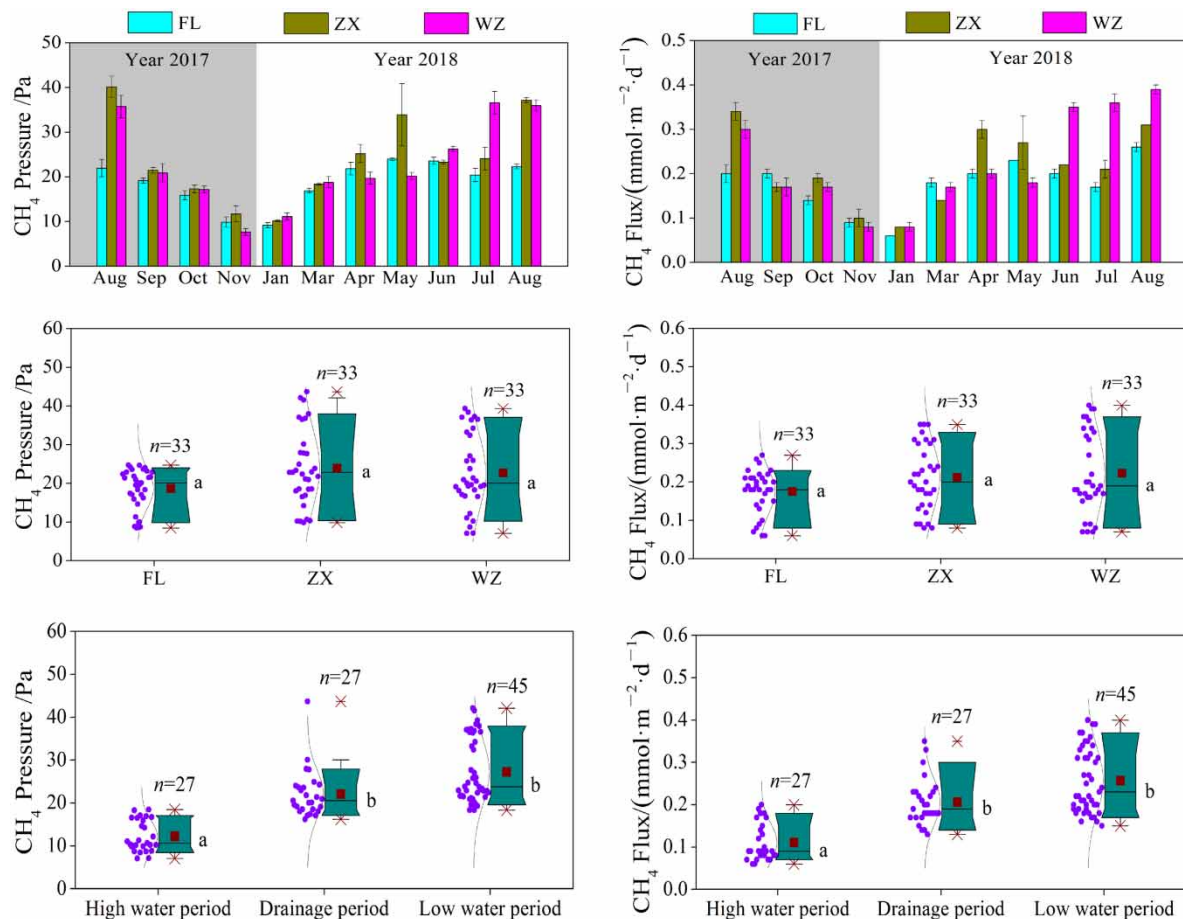


Figure 4 | CH_4 partial pressure of water and CH_4 flux at the water–air interface. (Note: a and b indicate differences between groups.)

pressure in high-water stage, drainage stage and low-water stage was 12.2 ± 3.4 , 22.0 ± 4.8 and 27.2 ± 7.1 Pa, respectively. Under different operating conditions, there were significant differences in CH_4 partial pressure (ANOVA, $P = 0.000 < 0.05$), and the low-water stage and drainage stage were significantly higher than the high-water stage.

The average annual CH_4 flux in the middle of Three Gorges Reservoir is $0.20 \pm 0.09 \text{ mmol}\cdot\text{m}^{-2}\cdot\text{d}^{-1}$. The average annual CH_4 flux at FL point was $0.17 \pm 0.05 \text{ mmol}\cdot\text{m}^{-2}\cdot\text{d}^{-1}$, reaching its maximum value in August of the next year; the annual average CH_4 flux at ZX point was $0.21 \pm 0.08 \text{ mmol}\cdot\text{m}^{-2}\cdot\text{d}^{-1}$, reaching its maximum value in August; and the annual average CH_4 flux at WZ point was $0.22 \pm 0.10 \text{ mmol}\cdot\text{m}^{-2}\cdot\text{d}^{-1}$, reaching its maximum value in August of the next year. The annual CH_4 fluxes of FL, ZX and WZ are all positive and are the 'source' of atmospheric CH_4 . There was no statistical difference in CH_4 flux at each point (ANOVA, $P > 0.05$). The average CH_4 flux in high-water stage, drainage stage and low-water stage is 0.11 ± 0.04 , 0.20 ± 0.04 and $0.25 \pm 0.07 \text{ mmol}\cdot\text{m}^{-2}\cdot\text{d}^{-1}$, respectively. In different operating periods, CH_4 fluxes were significantly different (ANOVA, $P = 0.000 < 0.05$), the low-water level and drainage stage were significantly higher than the high-water-level stage and the partial pressure of CH_4 fluxes and CH_4 presented similar laws.

3.1.3. Changes in physical and chemical indices of water quality

The change rules of DO, TOC and TN in the middle of the Three Gorges Reservoir at different points and different operating periods are shown in Figure 5. At different points, DO, TOC and TN showed similar variation patterns, in which DO reached a higher value the next January, and TOC and TN both reached a higher value the next July. There was no significant difference in annual DO, TOC and TN values at FL, ZX and WZ. In different operation periods, DO reaches the highest value in the high-water stage and the lowest value in the low-water stage. Both TOC and TN reached the lowest value in the high-water stage and the highest value in the low-water stage.

3.1.4. Main influencing factors of GHG flux at the water-gas interface

The correlation between the partial pressure of GHG and the GHG flux at the water-gas interface and environmental indicators in the middle section of the Three Gorges Reservoir is shown in Table 2. Correlation analysis shows that the partial pressures of CO_2 , CH_4 and fluxes of CO_2 and CH_4 at the water-gas interface in the middle part of the Three Gorges Reservoir are significantly positively correlated with TOC and TN, and extremely significantly negatively correlated with DO (Table 2). Correlation analysis of DO, TOC, TN and CH_4 fluxes is shown in Figure 6.

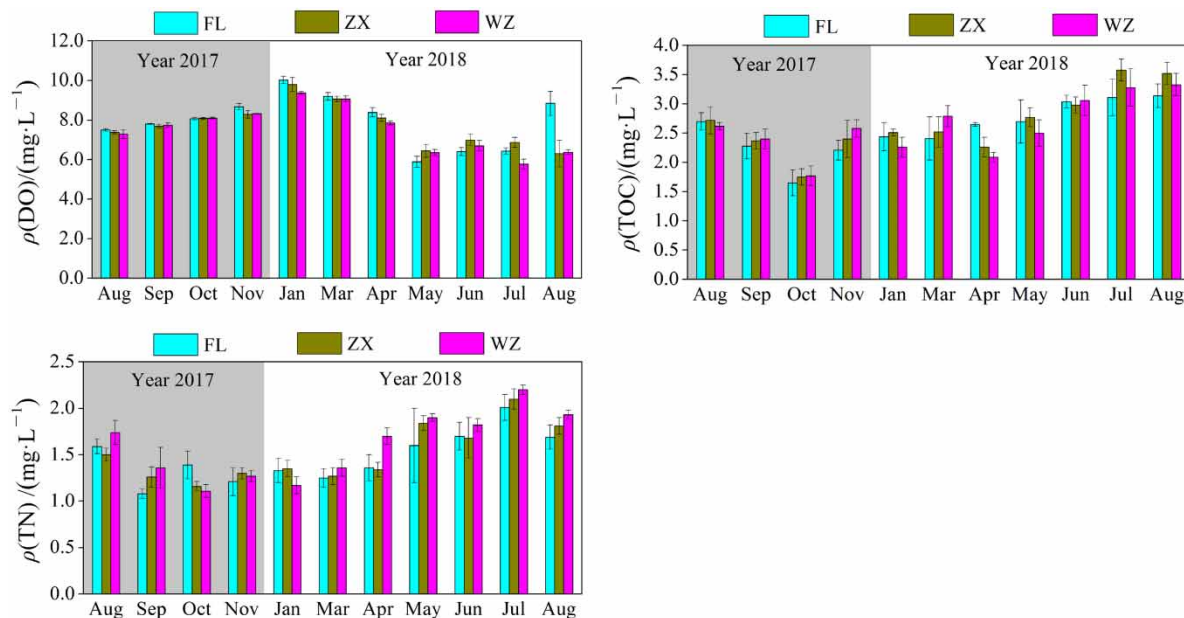


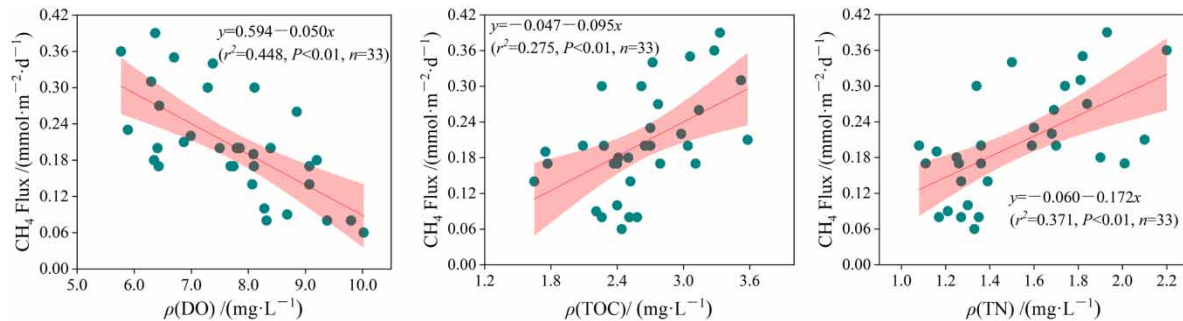
Figure 5 | Distribution of DO, TOC and TN in the water body of the middle part of the Three Gorges Reservoir.

Table 2 | Correlation between CO₂ and CH₄ partial pressure and flux and various physical and chemical indicators

	CO ₂ partial pressure	CH ₄ partial pressure	CO ₂ flux	CH ₄ flux
DO	-0.632**	-0.752**	-0.481**	-0.682**
TOC	0.425*	0.658**	0.380*	0.572**
TN	0.662**	0.699**	0.549**	0.621**

*indicates $P \leq 0.05$, indicating significant correlation.

**indicates $P \leq 0.01$, indicating extremely significant correlation.

**Figure 6** | Correlation between TOC, TN and CH₄ fluxes.

3.2. Discussion

3.2.1. Sediment deposition and its effects

More than 90% of suspended sediment in the Three Gorges Reservoir has been deposited in the perennial backwater area and in the ‘point’ form in the wide valley and curved reach in the past 10 years (Hu *et al.* 2013). Sediment deposition is related to river plane morphology, average flow rate, hydraulic residence time, sand-carrying capacity and relative sediment concentration (Li *et al.* 2016b). Sand-carrying capacity is greater than sediment concentration, resulting in scour, and conversely, sedimentation (Li *et al.* 2015b).

As shown in Figure 7, in the Zhutuo–Cuntan section of the tail river of the reservoir, the hydraulic retention time is short, the flow rate is large and the sand-carrying capacity is greater than the sediment content. Therefore, scour is dominant in this section. The Cuntan–Fuling section belongs to the fluctuating backwater area, and the sand-carrying capacity is weakened. In the Fuling–Wanzhou section, the perennial backwater area of the reservoir, the average flow velocity decreased, the hydraulic retention time increased and the sand-carrying capacity greatly weakened. In addition, the overall shape of the channel was ‘S’, resulting in a large number of sediment deposition, which was the most serious section in the reservoir area (Hu *et al.* 2013; Liu *et al.* 2014; Li *et al.* 2015b, 2016b). In the perennial backwater area of the first reservoir, affected by the impoundment of the Three Gorges Reservoir, the change of water level is basically synchronous with the water level in front of the Three Gorges Dam, the sand-carrying capacity is greatly reduced, the sand-carrying capacity is less than the sediment concentration and the sediment deposition is large.

According to the research (Yang *et al.* 2016), the average cumulative sediment deposition in the trunk stream of the Three Gorges Reservoir area was $3,430 \pm 644.0$ tons. In the Zhutuo–Cuntan section of the reservoir end river area, the sediment caused scour and the sediment flushing amount was $255.2 \pm 734,000$ tons. In the Cuntan–Fuling section of fluctuating backwater area, there was a small amount of silt deposition, which was 285 ± 2.588 million tons. In the perennial backwater area of the first part of the reservoir, the sediment state is deposition, the deposition amount is 960 ± 2.485 million tons, but the deposition is lower than that in the middle part of the reservoir. As shown in Figure 7, from 2014 to 2017, due to the comprehensive influence of water conservancy projects’ sand blocking, temporal and spatial distribution changes of rainfall, sand mining in river channels and other factors, the sediment transport quantity decreased significantly and the deposition rate slowed down somewhat.

The high CH₄ flux in the middle section of the Three Gorges Reservoir (Fuling–Wanzhou section) is correlated to the spatial distribution and deposition of sediment (Maeck *et al.* 2013). Compared to published literature, as shown in Figure 8,

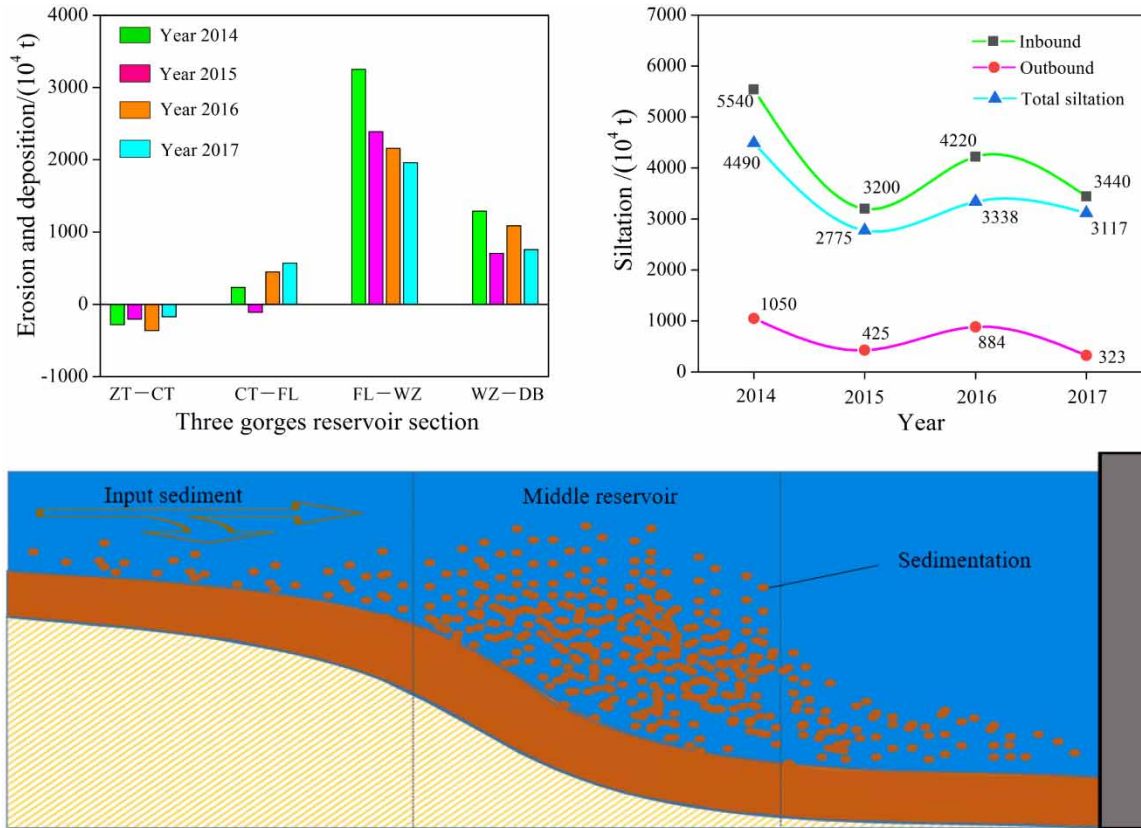


Figure 7 | Schematic diagram of sedimentation, sedimentation and sedimentation in the Three Gorges Reservoir.

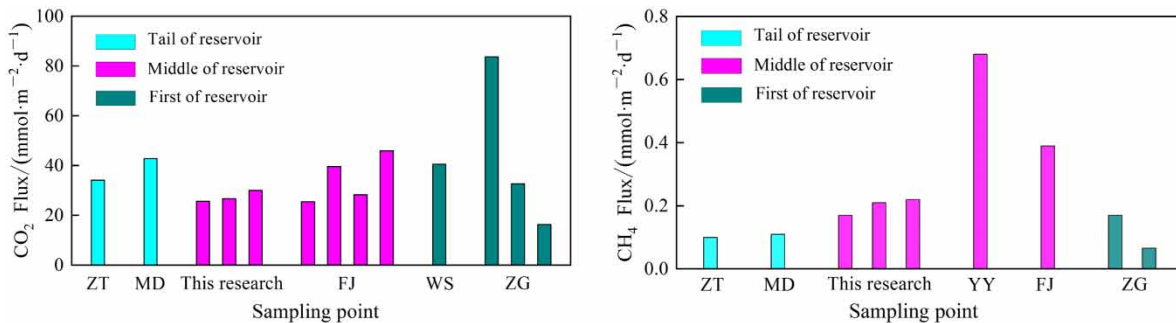


Figure 8 | Comparison of CO₂ and CH₄ fluxes in the first, middle and tail sections of the Three Gorges Reservoir area (Yang *et al.* 2012; Yang 2017; Yao *et al.* 2012; Wei *et al.* 2013; Li *et al.* 2014; Fu *et al.* 2016; Zhao 2016).

CO₂ and CH₄ fluxes at the water–gas interface in the Three Gorges Reservoir are 27.4 ± 10.8 and 0.20 ± 0.09 mmol·m⁻²·d⁻¹, respectively. Compared to the published literature, as shown in Figure 7, CO₂ and CH₄ fluxes at the water–gas interface in the reservoir area compare with the reservoir head of the Three Gorges Reservoir (Yang *et al.* 2012; Yao *et al.* 2012; Zhao 2016) and the tail of the reservoir (Yang 2017). There was no significant difference in CO₂ flux, but the CH₄ flux in the middle of the reservoir was higher than the flux at the head and tail of the reservoir. The above relationship characteristics are also supported in the correlation analysis of physical and chemical indexes of water quality. As more sediment deposition in the middle section of the reservoir leads to a high CH₄ flux, it is suggested that sediment deposition can be removed by dredging to slow down the CH₄ emission.

3.2.2. Influence of DO

DO has an important effect on the discharge of CH₄ in the reservoir (Schrier-Uijl *et al.* 2011). The content of DO in water determines the process of organic matter degradation in water. Usually, in the process of the carbon cycle, the sediments CH₄ produced in anaerobic conditions, through pore water into the sediment and water interface, and then enter the water upward diffusion, part of CH₄ in the process of diffusion was oxidized to CO₂, and during the period of water diffusion, CH₄ is further oxidation, only a small amount of CH₄ discharge into the atmosphere (Chen *et al.* 2009). Studies have shown that CO₂ flux is significantly negatively correlated with DO in water (Wang *et al.* 2012). Similarly, the concentration of CH₄ is significantly negatively correlated with the concentration of DO in water (Wang *et al.* 2009), indicating that the higher the DO in water, the more CH₄ is oxidized. Biological activities in the water can affect DO concentration in the water, that is, phytoplankton can increase DO in the water through photosynthesis; on the contrary, respiration of aquatic plants and decomposition of organic matter can consume DO in the water. DO produced by photosynthesis also affects GHG production and emissions (Arend *et al.* 2011). In this study, there was a significant negative correlation between DO and CH₄ flux (Furlanetto *et al.* 2012), and CH₄ flux increased with the decrease of DO. In the middle part of the Three Gorges Reservoir, the DO in the low-water-level period is significantly lower than that in the high-water-level period, and the content of DO in the water body decreases, which results in the CH₄ produced by the sediment at the bottom, cannot be fully oxidized during the rising process. Therefore, the content of CH₄ in the low-water-level period is higher than that in the high-water-level period.

3.2.3. Influence of TOC

The decomposition or mineralization of organic matter in lakes or reservoirs is essential for the production of CO₂ and CH₄. The main source of organic carbon in water is related to the system biological residues and exogenous input. Organic carbon is the direct carbon source of methanogenic bacteria decomposition and CO₂ production, and its content has an important influence on the production and emission of CO₂ and CH₄ in the reservoir (Sobek *et al.* 2012). Under anaerobic conditions, the decomposition of most organic matter at the bottom of the reservoir promotes the formation of CH₄ (Roland *et al.* 2017). DOC affects the CO₂ concentration of water to some extent, and this effect varies depending on the concentration, source and geographic location of the DOC (Zhao *et al.* 2008). During the silting process in the middle section of the Three Gorges Reservoir, a large amount of organic carbon is carried, providing a carbon source for methanogens at the bottom. Under the action of the methanogens and the DO in the water column, CO₂ and CH₄ are generated and released into the atmosphere (Jacinthe *et al.* 2012). When the content of organic matter in sediments and water is high, the number of methanogenic bacteria increases, and the increase of CH₄ production leads to the increase of emission flux. In this study, TOC in water was significantly positively correlated with CH₄ flux (Martinez-Cruz *et al.* 2017). As shown in Figure 6, CH₄ flux increased with the increase of TOC (Li *et al.* 2018a). In northern reservoirs with high DOC concentrations, CO₂ concentrations are usually strongly correlated with DOC concentrations, and aquatic metabolism may be the main driver of CO₂ oversaturation (Saidi & Koschorreck 2017).

3.2.4. Influence of TN

TN is often used to indicate the degree of water pollution by nutrients. The increase of water nutrient level is conducive to CH₄ production, mainly due to the increase of nutrient elements and organic carbon content transported from water to sediment, methanogens get more substrates and nutrients, dissolved nitrogen in rivers is a potential contributor to GHG emissions (Qu *et al.* 2017). Previous studies have shown that CH₄ production in lake and reservoir sediments increases with the increase of lake nutrient level (Davidson *et al.* 2015). On the one hand, phytoplankton will absorb nitrogen nutrients in the water under photosynthesis, resulting in a decrease in CO₂ concentration in the water, and atmospheric CO₂ will enter the water (Jiang *et al.* 2012). On the other hand, the increase of nitrogen concentration in water will improve primary productivity, increase water respiration and lead to the increase of CO₂ concentration in water. Thus, the transition leads to changes in the CO₂ 'source' and 'sink' processes between photosynthesis and respiration. The increase of nitrogen nutrients in the reservoir ecosystem (Morgane *et al.* 2019) can stimulate primary production and carbon sequestration (Knoll *et al.* 2013). The high concentration of nutrients can provide substrates for aquatic organisms to accelerate respiration, reduce DO in water and form an anaerobic environment, which is conducive to the generation and discharge of CH₄ in water. In this study, TN and CH₄ flux showed a very significant positive correlation, as shown in Figure 6, and CH₄ flux increased with the increase of TN content. The results show that the TN content in the water body is the environmental factor affecting the seasonal variation of CH₄ emission.

4. CONCLUSIONS

1. The average annual CO₂ flux in the middle of the Three Gorges Reservoir is $27.4 \pm 10.8 \text{ mmol}\cdot\text{m}^{-2}\cdot\text{d}^{-1}$. There was no statistical difference in the CO₂ flux between the measured points. The CO₂ flux during the drainage period and the low-water-level period was significantly higher than that during the high-water-level period, and reached the lowest value during the high-water-level period. The average annual CH₄ flux in the middle of the reservoir area is $0.20 \pm 0.09 \text{ mmol}\cdot\text{m}^{-2}\cdot\text{d}^{-1}$. There is no statistical difference in CH₄ flux between the measured points, and CH₄ flux in the drainage stage and the low-water stage is significantly higher than that in the high-water stage.
2. In the middle part of the Three Gorges Reservoir, there is a certain correlation between the spatial distribution and deposition amount of sediment and the emission of carbon flux of GHG. With the increase of sediment deposition, the emission of carbon flux of GHG also tends to increase. The partial pressure and flux of CO₂ and CH₄ in water were significantly positively correlated with TOC and TN and significantly negatively correlated with DO.
3. The high value of CH₄ flux at the water–gas interface in the middle section of the reservoir is related to the spatial distribution and deposition of sediment. In future studies, the GHG emission in the middle section of the reservoir should be further studied in combination with the physical and chemical characteristics of sediment.
4. This research focuses on the macroscopic exploration of the middle section of the Three Gorges Reservoir area (Wanzhou–Fuling section). However, there is still a lack of microscopic observations in this field, such as microbes, phytoplankton and zooplankton related to GHGs, which need to be further studied.
5. The research is based on long-term observation and is heavily influenced by field conditions. Further research can be carried out in the area of laboratory simulation experiment.

ACKNOWLEDGEMENT

This work was supported by the National Natural Science Foundation Project of China (No.51609026) and the Postgraduate Research Innovation Project of Chongqing Jiaotong University (CYS21352).

DATA AVAILABILITY STATEMENT

All relevant data are included in the paper or its Supplementary Information.

REFERENCES

- Abril, G., Martinez, J. M., Artigas, L. F., Moreira-Turcq, P., Benedetti, M. F., Vidal, L., Meziane, T., Kim, J.-H., Bernardes, M. C., Savoye, N., Deborde, J., Souza, E. L., Albéric, P., Landim de Souza, M. F. & Roland, F. 2014 [Amazon River carbon dioxide outgassing fuelled by wetlands](#). *Nature* **505** (7483), 395–398.
- Alizadeh, M. J., Kavianpour, M. R., Danesh, M., Adolf, J., Shamshirband, S. & Chau, K.-W. 2018 [Effect of river flow on the quality of estuarine and coastal waters using machine learning models](#). *Engineering Applications of Computational Fluid Mechanics* **12** (1), 810–823.
- Arend, K. K., Beletsky, D., Depinto, J. V., Ludsin, S. A., Roberts, J. J., Rucinski, D. K., Scavia, D., Schwab, D. J. & Höök, T. O. 2011 [Seasonal and interannual effects of hypoxia on fish habitat quality in central Lake Erie](#). *Freshwater Biology* **56** (2), 366–383.
- Barros, N., Cole, J. J., Tranvik, L. J., Prairie, Y. T., Bastviken, D., Huszar, V. L. M., del Giorgio, P. & Roland, F. 2011 [Carbon emission from hydroelectric reservoirs linked to reservoir age and latitude](#). *Nature Geoscience* **4** (9), 593–596.
- Chen, X. Y., Dan, H. C., Jiang, D. G., Li, H. & Dai, L. 2009 [Research on process of GHG emission from reservoir](#). *Water Resources and Power* **27** (5), 37–39.
- Dash, S. S., Sahoo, B. & Raghuvanshi, N. S. 2019 [A SWAT-Copula based approach for monitoring and assessment of drought propagation in an irrigation command](#). *Ecological Engineering* **127**, 417–430.
- Dash, S. S., Sahoo, B. & Raghuvanshi, N. S. 2021 [How reliable are the evapotranspiration estimates by Soil and Water Assessment Tool \(SWAT\) and Variable Infiltration Capacity \(VIC\) models for catchment-scale drought assessment and irrigation planning?](#) *Journal of Hydrology* **592**, 125838.
- Davidson, T. A., Audet, J., Svenning, J. C., Lauridsen, T. L., Søndergaard, M., Landkildehus, F., Larsen, S. E. & Jeppesen, E. 2015 [Eutrophication effects on GHG fluxes from shallow-lake mesocosms override those of climate warming](#). *Global Change Biology* **21** (12), 4449–4463.
- Fu, J. N., Cao, M., Deng, B., Ziran, Z., Chen, Y., Dang, C., Wang, Y. & Wang, F. 2016 [Partial pressure and diffusion flux of dissolved carbon dioxide in typical mainstream and tributaries of the Three Gorges Reservoir during high water level period](#). *Earth and Environment* **44** (1), 64–72.

- Furlanetto, L. M., Marinho, C., Palma, S. C., Albertoni, E. F., Figueiredo-Barros, M. P. & de Assis Esteves, F. 2012 Methane levels in shallow subtropical lake sediments: dependence on the trophic status of the lake and allochthonous input. *Limnologia* **42** (2), 151–155.
- Gong, W. J., Wen, S. L., Wang, H. W. *et al.* 2019 Characteristics of GHG occurrence and emission in summer and autumn of Daheiting Reservoir. *China Environmental Science* **39** (11), 4611–4619.
- Hu, J., Yang, S. F., Wang, X. K., Tao, W., Xin, L. & Zhong, J. 2013 Sedimentation in Yangtze River above Three Gorges Project since 2003. *Journal of Sediment Research* **1**, 39–44.
- Jacinto, P. A., Filippelli, G. M., Tedesco, L. P. & Raftis, R. 2012 Carbon storage and GHG emission from a fluvial reservoir in an agricultural landscape. *Catena* **94** (9), 53–63.
- Jiang, T., Guo, J. S., Li, Z., Fang, F., Bai, L. & Liu, J. 2012 A preliminary study on the characteristics of greenhouse gas fluxes at the water-air interface of Pengxi River, a tributary of the Three Gorges Reservoir, under different operating conditions. *Environmental Science* **33** (5), 1463–1470.
- Kargar, K., Samadianfar, S., Parsa, J., Nabipour, N., Shamshirband, S., Mosavi, A. & Chau, K.-W. 2020 Estimating longitudinal dispersion coefficient in natural streams using empirical models and machine learning algorithms. *Engineering Applications of Computational Fluid Mechanics* **14** (1), 311–322.
- Knoll, L. B., Vanni, M. J., Renwick, W. H., Dittman, E. K. & Gephart, J. A. 2013 Temperate reservoirs are large carbon sinks and small CO₂ sources: results from high-resolution carbon budgets. *Global Biogeochemical Cycles* **27** (1), 52–64.
- Kolb, B. & Ettre, L. S. 2006 *Static Headspace-Gas Chromatography: Theory and Practice*, 2nd edn. John Wiley and Sons, New Jersey, p. 349.
- Kumar, A., Yang, T. & Sharma, M. P. 2019 GHG measurement from Chinese freshwater bodies: a review. *Journal of Cleaner Production* **233**, 368–378.
- Lemer, J. & Roger, P. 2001 Production, oxidation, emission and consumption of methane by soils: a review. *European Journal of Soil Biology* **37**, 25–50.
- Li, Z., Bai, L., Guo, J., Fang, F. & Jiang, T. 2013 Comparative study on water-air CO₂, CH₄ flux in two tributaries in the Three Gorges Reservoir, China. *Environmental Science* **34** (3), 1009–1015.
- Li, S., Wang, C. Y., Cao, M., Qian, H., Xu, T., Zhou, Z., Deng, B. & Wang, F. 2014 Partial pressure and diffusion flux of dissolved carbon dioxide in the mainstream and tributary of the central Three Gorges Reservoir in summer. *Environmental Science* **35** (3), 885–891.
- Li, W. J., Yang, S. F. & Fu, X. F. 2015a Sedimentation characteristics of the Three Gorges Reservoir during its initial operation. *Advances in Water Science* **26** (5), 676–685.
- Li, W. J., Yang, S. F., Hu, J. & Fu, X. F. 2015b Experimental research on flocculation of fine sediment in Three Gorges Reservoir area. *Journal of Basic Science and Engineering* **23** (5), 851–859.
- Li, L., Pu, J. B., Li, J. H., Shi, Y., Qiong, X. & Tao, Z. 2016a Variations of CO₂ exchange fluxes across water-air interface and environmental meaning in a surface stream in subtropical karst area, SW China. *Environment Science* **37** (7), 2487–2495.
- Li, W. J., Li, N., Yang, S. F. & Wang, T. 2016b Analysis of the sedimentation in the Three Gorges Reservoir based on the sediment carrying capacity. *Advances in Water Science* **27** (5), 726–734.
- Li, S. Y. 2018 CO₂ oversaturation and degassing using chambers and a new gas transfer velocity model from the Three Gorges Reservoir surface. *Science of the Total Environment* **640**, 908–920.
- Li, L., Xue, B., Yao, S., Tao, Y. & Yan, R. 2018a Spatial-temporal patterns of methane dynamics in Lake Taihu. *Hydrobiologia* **822** (1), 143–156.
- Li, Z., Chen, Y. B., Li, C., Guo, J., Xiao, Y. & Lu, L. 2018b Advances of eco-environmental effects and adaptive management in river cascading development. *Advances in Earth Science* **33** (07), 675–686.
- Li, Z., Lu, H. L., Lv, P. Y., Zhang, Z. Y. & Guo, J. S. 2020 Imbalanced stoichiometric reservoir sedimentation regulates methane accumulation in China's Three Gorges Reservoir. *Water Resources Research* **56** (9), 26447.
- Liu, Y., Yang, S. F. & Hu, P. 2014 Discussion on the siltation characteristics of continuous bends in the early storage period of the Three Gorges Reservoir area. *Yangtze River* **45** (1), 1–4.
- Liu, S., Xi, X. L., Xia, X., Yang, X. & Ran, L. 2017 Hydrological and geomorphological control on CO₂ outgassing from low-gradient large rivers: an example of the Yangtze River system. *Journal of Hydrology* **550**, 26–41.
- Liu, W. T., Yao, X. L., Xue, J. Y., Zhao, Z., Zhang, L., Wang, X. & Cai, Y. 2019 Seasonal and spatial variations in GHG (CH₄ and CO₂) emission along the riparian zone of middle and lower reaches of Yangtze River. *Resources and Environment in the Yangtze Basin* **28** (11), 2718–2726.
- Luo, J. C., Mao, R. & Li, S. Y. 2018 pCO₂ in the main rivers of the Three Gorges Reservoir and its influencing factors. *Environmental Science* **39** (7), 3134–3141.
- Maeck, A., DelSontro, T., McGinnis, D. F., Fischer, H., Flury, S., Schmidt, M., Fietzek, P. & Lorke, A. 2013 Sediment trapping by dams creates methane emission hot spots. *Environmental Science & Technology* **47**, 8130–8137.
- Martinez-Cruz, K., Gonzalez-Valencia, R., Sepulveda, J. A., Plascencia-Hernandez, F., Belmonte-Izquierdo, Y. & Thalasso, F. 2017 Methane emission from aquatic ecosystems of Mexico City. *Aquatic Sciences* **79** (1), 159–169.
- Mccully, P. 2002 *Flooding the Land, Warming the Earth: GHG Emissions from Dams*. International Rivers Network, Berkeley, CA, USA.
- Morales-Pineda, M., Cozar, A., Laiz, I., Úbeda, B. & Gálvez, J. A. 2014 Daily, biweekly, and seasonal temporal scales of pCO₂ variability in two stratified Mediterranean reservoirs. *Journal of Geophysical Research Biogeosciences* **119** (4), 509–520.
- Morgane, L. M., Chantal, G.-O., Alain, M., Souchon, Y., Étrillard, C., Levain, A., Moatar, F., Pannard, A., Souchu, P., Lefebvre, A. & Pinay, G. 2019 Eutrophication: a new wine in an old bottle? *Science of the Total Environment* **651**, 1–11.
- Nilsson, C. & Berggren, K. 2000 Alterations of riparian ecosystems caused by river regulation. *BioScience* **50** (9), 783–792.

- Qin, Y., Zang, Y., Li, Z. & Ma, J. 2017a CH₄ fluxes during the algal bloom in the Pengxi River. *Environmental Science* **35** (11), 1578–1588.
- Qin, Y., Yang, B. X., Li, Z., Hao, B. & Du, H. 2017b CO₂ and CH₄ flux across water-air interface in summer in the downstream of Jinsha River, Southwest China. *Journal of Lake Sciences* **29** (04), 991–999.
- Qu, B., Aho, K. S., Li, C., Kang, S., Sillanpää, M., Yan, F. & Raymond, P. A. 2017 GHG emissions in rivers of the Tibetan Plateau. *Scientific Reports* **7** (1), 16573.
- Rantakari, M., Heiskanen, J., Mammarella, I., Tulonen, T., Linnaluoma, J., Kankaala, P. & Ojala, A. 2015 Different apparent gas exchange coefficients for CO₂ and CH₄: comparing a brown-water and a clear-water lake in the boreal zone during the whole growing season. *Environmental Science & Technology* **49** (19), 11388–11394.
- Rik, W. 1992 Relationship between wind speed and gas exchange over the ocean. *Journal of Geophysical Research* **97** (C5), 7373–7382.
- Rodhe, H. 1990 A comparison of the contribution of various gases to the greenhouse effect. *Science* **248** (4960), 1217–1219.
- Roland, F., Darchambeau, F., Morana, C., Bouillon, S. & Borges, A. V. 2017 Emission and oxidation of methane in a meromictic, eutrophic and temperate lake (Dendre, Belgium). *Chemosphere* **168**, 756–764.
- Rosa, L. P., Santos, M. A. D., Matvienko, B., Sikar, E., Lourenço, R. S. M. & Menezes, C. F. 2003 Biogenic gas production from major Amazon reservoirs, Brazil. *Hydrological Processes* **17** (7), 1443–1450.
- Saidi, H. & Koschorreck, M. 2017 CO₂ emissions from German drinking water reservoirs. *Science of the Total Environment* **581**, 10–18.
- Sawakuchi, H. O., Bastviken, D., Sawakuchi, A. O., Krusche, A. V., Ballester, M. V. R. & Richey, J. E. 2014 Methane emissions from Amazonian Rivers and their contribution to the global methane budget. *Global Change Biology* **20** (9), 2829–2840.
- Schrier-Uijl, A. P., Veraart, A. J., Leffelaar, P. A., Berendse, F. & Veenendaal, E. M. 2011 Release of CO₂ and CH₄ from lakes and drainage ditches in temperate wetlands. *Biogeochemistry* **102** (1–3), 265–279.
- Shamshirband, S., Nodoushan, E. J., Adolf, J. E., Manaf, A. A., Mosavi, A. & Chau, K.-W. 2019 Ensemble models with uncertainty analysis for multi-day ahead forecasting of chlorophyll a concentration in coastal waters. *Engineering Applications of Computational Fluid Mechanics* **13** (1), 91–101.
- Sobek, S., Delsontro, T., Wongfun, N. & Wehrli, B. 2012 Extreme organic carbon burial fuels intense methane bubbling in a temperate reservoir. *Geophysical Research Letters* **39** (1), L01401.
- Tremblay, A., Lambert, M. & Gagnon, L. 2004 Do hydroelectric reservoirs emit GHG? *Environmental Management* **33** (S1), S509–S517.
- Tremblay, A., Varfalvy, L., Roehm, C., Varfalvy, L. & Garneau, M. 2005 *GHG Emissions: Fluxes and Processes, Hydroelectric Reservoirs and Natural Environments*. Springer, New York, pp. 725–732.
- Wang, D. Q., Chen, Z., Sun, W., Hu, B. & Xu, S. 2009 Methane and nitrous oxide concentration and emission flux of Yangtze Delta plain river net. *Science China Chemistry* **52** (5), 126–135.
- Wang, C. H., Du Q. Y. & Zhao, D. Z. 2012 Study on the space-time characteristics of CO₂ emission flux in the reservoir and its response to environmental factors. *Journal of Hydroelectric Power* **31** (2), 148–153.
- Wei, H. B., Wu, X. Q., Cao, M., Fu, J., Jia, X., Deng, B. & Wang, F. 2013 Partial pressure and diffusion flux of dissolved carbon dioxide in mainstream and tributary (Zhuyi River) of the Three Gorges Reservoir in summer. *Journal of Shanghai University (Natural Science Edition)* **37** (4), 497–504.
- Wu, Y. 2012 *Study on GHG Flux from Newly Created Marshes and Carbon Sink in the Three Gorges Reservoir*. Chongqing University, Chongqing.
- Wu, M. 2016 *The Characteristics and Influencing Factors of GHG Emissions in Different Water Bodies in Chongzhou*. Sichuan Agricultural University, Ya'an.
- Yang, L., Zhang, Y., Hou Pei, Q., Sun, B., Zhang, Q., Wang, X. & Lu, F. 2012 Spatiotemporal variation and mechanism of nitrogen and phosphorus in the middle and lower reaches of the Three Gorges Reservoir. *Resources and Environment in the Yangtze Basin* **21** (6), 732.
- Yang, P., Gong, C., He, Q. H. & Huang, J. 2013 Yujiangkou fish and shrimp mixed pond water-gas interface GHG flux and main influencing factors. *Journal of Environmental Science* **33** (5), 1493–1503.
- Yang, B. X. & Lv, F. 2016 A summary of research status of headspace balance method. *Chemical Engineering & Equipment* (7), 206–207.
- Yang, S., Li, W., Hu, X., Hu, J. & Wang, T. 2016 Study on sediment deposition model and channel passing capacity improvement of three gorges reservoir. *Journal of Chongqing Jiaotong University (Natural Science Edition)* **35** (S1), 41–48.
- Yang, B. 2017 *Comparative study on greenhouse gas fluxes at the water-gas interface between the Three Gorges and the lower reaches of the Jinsha River*. Chongqing Jiaotong University.
- Yao, C. Z., Zhang, J. & Wu, Y. 2012 Partial pressure of water body dissolved carbon dioxide in mainstream and Xiangxi bay of Three Gorges Reservoir area in autumn. *Chinese Journal of Ecology* **31** (1), 152–157.
- Yao X, L. I. Z., Guo, J. S., Lin, C., Chen, Y. & LI, C. 2015 Comparison between closed static chamber method and thin boundary layer method on monitoring air-water CO₂ diffusion flux. *Journal of Lake Sciences* **27** (2), 289–296.
- Zhao, X. J., Zhao, T. Q., Zheng, H., Duan, X., Chen, F., Ouyang, Z. & Wang, X. 2008 Emissions of greenhouse gases in reservoirs and their influencing factors. *Environmental Science* **29** (8), 2377–2387.
- Zhao, Y., Zeng, Y., Wu, B. F., Wang, Q., Yuan, C. & Xu, Z. 2011 Observation on GHG emissions from Xiangxi River in Three Gorges Region. *Advances in Water Science* **22** (4), 546–553.
- Zhao, W. 2016 Temporal-Spatial patterns of methane emission flux and its influence factors in HuBei Part of Three Gorges Reservoir. *Acta Hydrobiologica Sinica* **22** (4), 776–781.