

Identification of antibiotics in wastewater: current state of extraction protocol and future perspectives

A. C. Faleye, A. A. Adegoke, K. Ramluckan, F. Bux and T. A. Stenström

ABSTRACT

The release and occurrence of antibiotics in the aquatic environment has generated increased attention in the past few decades. The residual antibiotic in wastewater is important in the selection for antimicrobial resistance among microorganisms and the possibility of forming toxic derivatives. This review presents an assessment of the advancement in methods for extraction of antibiotics with solid phase extraction and liquid–liquid extraction methods applied in different aquatic environmental media. These advanced methods do enhance specificity, and also exhibit high accuracy and recovery. The aim of this review is to assess the pros and cons of the methods of extraction towards identification of quinolones and sulphonamides as examples of relevant antibiotics in wastewater. The challenges associated with the improvements are also examined with a view of providing potential perspectives for better extraction and identification protocols in the near future. From the context of this review, magnetic molecular imprinted polymer is superior over the remaining extraction methods (with the availability of commercial templates and monomers), is based on less cumbersome extraction procedures, uses less solvent and has the advantage of its reusable magnetic phase.

Key words | antibiotics, extraction protocol, quinolones, sulphonamides, wastewaters

A. C. Faleye (corresponding author)
A. A. Adegoke
F. Bux
T. A. Stenström
Institute for Water and Wastewater Technology,
Durban University of Technology,
Durban,
South Africa
E-mail: kunle_faleye@yahoo.co.uk

A. C. Faleye
K. Ramluckan
Department of Chemistry, Faculty of Applied
Sciences,
Durban University of Technology,
Durban,
South Africa

INTRODUCTION

The prevalence of micro-pollutants like pharmaceuticals in the aquatic environment has become an issue of global importance in recent years. Pharmaceuticals are used in human and veterinary medicine as prophylaxis and therapeutics, boosting immunity as well as stimulating and improving the rate of growth in animal production (Luo *et al.* 2014). This is seen as a response to provide for the ever growing human population, to meet an increasing demand (Singer *et al.* 2003; Van Boeckel *et al.* 2015). This increase in antibiotic consumption may facilitate antibiotic resistance development in microorganisms. The treatment of antibiotic resistant bacteria in humans may demand increased doses of antibiotics, the combination of several drugs or the use of entirely new ones (Boehme *et al.* 2010).

Antibiotics are released to the aquatic environment through various routes. After administration to humans, they are excreted partly as incompletely metabolized products (Chang *et al.* 2010) and partly as unchanged active compound via urine and feces, ending up in the sewer system, and are subsequently released into the environment in the effluents after potential wastewater treatment (Kümmerer 2009). The wastewater treatment plants (WWTPs) have been shown to have low capacity towards the removal of antibiotics from the wastewater (Seifrtová *et al.* 2009; Wei *et al.* 2010). Hence, the effluents are major contributors of antibiotics into the aquatic environment. The use of sludge, from WWTPs or on-site sanitation facilities, as fertilizer with active antibiotic components also contributes to release of antibiotics to the soil environment

and can affect the microorganisms present therein (Bagner *et al.* 2000; Kumar *et al.* 2005). Subsequent run-off of organic fertilizers from agricultural land increases the spread of the antibiotics further into the aquatic environment (Michael *et al.* 2013; Pruden *et al.* 2013).

Animal excreta (manure) applied to agricultural fields as fertilizers are a source of contamination, as most of the antibiotics consumed by the animals end up in their excreta in the active form or modified (Toumi *et al.* 2015). Residual antibiotics in animal excreta enter the environment through run-offs from agricultural land or irrigation and are sometimes taken up by plants and transferable via the consumption of such plants (Venglovsky *et al.* 2009; Eggen *et al.* 2011). The active compounds of the antibiotics, or their biologically active metabolites, may also percolate from land or leaking sewers to the groundwater (Frey *et al.* 2015). The presence of these active components in the environment remains a potential risk whether at low (sub-lethal level) or high (toxic level) concentration (Jiang *et al.* 2013).

Quinolones (ciprofloxacin) are among the most used antibiotics in the world, and the wide spread of resistant strains has been well established (Acar & Goldstein 1997; Rocha *et al.* 2017). Lower respiratory tract infections are sometimes not susceptible to ciprofloxacin (Fuller & Low 2005; Pereyre *et al.* 2016; Pribul *et al.* 2017). This trend in bacterial resistance is on the increase, creating a haven of super resistant bacteria to the stronger antibiotics. The same fate of resistance applies to sulphonamide, which has led to reduction in its usage (Enne *et al.* 2001; Alonso *et al.* 2017). One of the causes of antibiotic resistance is the 'misuse of antibiotics', which leads to selection for resistance genes (Lukačičinová & Bollenbach 2017). The presence of these antibiotics in the water and food we consume (Jones *et al.* 2005) may lead to their unintentional misuse and further resistance development (Jones *et al.* 2003). This calls for a holistic approach to mitigate the presence and persistence of antibiotics in the environment from sources such as the wastewater.

Several methods have been developed for identifying and quantifying antibiotics in different aquatic regimes, such as sewage water (Lindberg *et al.* 2005; Li *et al.* 2007; Dorival-García *et al.* 2013), drinking water (Fick *et al.* 2009; Rodríguez *et al.* 2011; Dzomba *et al.* 2014), river water (Senta *et al.* 2008; Agunbiade & Moodley 2014;

Ngumba *et al.* 2016) and groundwater (Batt & Aga 2005; Olaitan *et al.* 2014). Prior to the analysis, the analyte of interest must be concentrated and extracted from the collected samples matrix using sample preparation steps which involve filtration and the use of different analyte-sequestering methods such as solvent extraction (Nabais & Cardoso 1995; Yan *et al.* 2011) and solid-phase extraction (SPE) methods (Dorival-García *et al.* 2013; Errayess *et al.* 2017).

Environmental detection and quantification of antibiotics is essential; hence, the extraction/analysis protocol is a vital part of the chemical risk assessment. The common traditional methods of extraction of antibiotics in wastewater are liquid-liquid extraction (LLE) and SPE. These have several shortfalls in their traditional set-up, including cumbersome procedure, use of expensive glassware, low efficiency in sample clean-up, low specificity towards the target analyte, and reduced recovery when compared with the related recent advanced methods.

Quinolones and sulphonamides are the two types of antibiotics focused on as examples in this review. Their selection is based on the rate of use of these antibiotics in relation to the prevalent diseases and with reference to available data on the rate of production/sales (Van Boeckel *et al.* 2014), their stability in the aquatic environment (wastewater) (Gaugain *et al.* 2013) and the impact of the antibiotics in relation to antibiotic resistance (Rodríguez-Mozaz *et al.* 2015). Their extraction procedures have a good base for comparison of LLE and SPE as well as the advanced states of the extraction methods that use similar detection instrumentation. These criteria were the basis for the screening of research papers for this review.

FACTORS INFLUENCING SAMPLE PREPARATION

All experiments are dependent on the quality of sampling. Sample collection and preparation (preservation, filtration and extraction) are the first steps and an essential part of the analytical procedure, followed by chromatographic separation, detection and data analysis. Proportionately, 80% of the analytical time is used for sampling and sample preparation (Buszewski & Szultka 2012). Sampling generally implies choosing a small fraction of a matrix that is representative of the quality of the whole matrix. Factors such

as frequency and time of sampling, temperature, sampling method and sampling equipment must be critically considered in order to have a good sample for antibiotics analysis (Ort *et al.* 2010).

A good knowledge of the physicochemical properties of the analytes (antibiotics) is an important precondition in sample preparation (Namieśnik *et al.* 2005). As highlighted in Table 1, the acid dissociation constant (pKa) is an indicator of the acid–base property of the antibiotics and determines its ionization rate, which enables an effective adjustment of the sample pH for preservation and extraction (Qiang & Adams 2004). Partition coefficient (log P) is an indicator of the degree of hydrophilicity and hydrophobicity of a substance and measures its solubility in two different phases. Antibiotics with high log P are hydrophobic in nature, whereas a low log P is hydrophilic (Pavlović *et al.* 2007). Cyclic or ring structures of antibiotics can also influence their solubility as well as the level of complexity (the bond structure within the rings) and number of rings. These parameters guide the selection of solvent and extraction media when choosing the extraction method.

It can be inferred that there is a tendency for the solubility of an antibiotic in water to increase with decreasing number of rings in the molecule.








Various models for predicting the solubility of drugs exist, based on parameters such as the log P of the drug, molecular weight and fragment pattern (Sanghvi *et al.* 2003; Lipinski *et al.* 2012; Knopp *et al.* 2015) as well as commercial computational means of predicting the solubility of drugs such as CLOGP (Daylight Chemical Information Systems) and ACD (Advanced Chemistry Development, Inc.). Most of these models require experimental procedures to justify the numerical solubility values assigned to drugs. None of the published models makes use of the number of ring structures to estimate the drug solubility.

Data of the different quinolones and sulphonamides as tabulated in Tables 2 and 3 indicate a relationship between the number of rings and the solubility of the antibiotics. Nalidixic acid (quinolone) and sulfacetamide (sulphonamide) have the smallest number of rings and the highest solubility values in relation to other antibiotics in the table.

Table 1 | Interrelatedness of physicochemical properties of some antibiotics (DrugBank 2017)

| Antibiotics | Class of antibiotics | pKa (acid) | Log P | Water solubility mg/mL | Number of rings per antibiotic |
|------------------|----------------------|------------|-------|------------------------|--------------------------------|
| Tetracycline | Tetracycline | −2.20 | −0.56 | 1.33 | 4 |
| Doxycycline | | −2.20 | −0.72 | 0.63 | 4 |
| Oxytetracycline | | 0.24 | −0.99 | 1.40 | 4 |
| Amoxicillin | Beta lactam | 3.23 | 0.75 | 0.96 | 3 |
| Flucloxacillin | | 3.75 | 2.69 | 0.06 | 4 |
| Ceftriaxone | | 3.19 | −0.01 | 0.11 | 4 |
| Erythromycin | Macrolide | 12.44 | 2.37 | 0.46 | 3 |
| Azithromycin | | 12.43 | 3.03 | 0.51 | 3 |
| Clarithromycin | | 12.46 | 3.18 | 0.22 | 3 |
| Sulfamethoxazole | Sulphonamides | 6.16 | 0.79 | 0.46 | 2 |
| Sulfanilamide | | −0.25 | −0.16 | 10.4 | 1 |
| Sulfadiazine | | 6.99 | 0.25 | 0.60 | 2 |
| Metronidazole | Imidazole | 15.44 | −0.15 | 5.92 | 1 |
| Albendazole | Benzimidazole | 9.51 | 3.22 | 0.02 | 2 |
| Ethambutol | Antituberculosis | 14.82 | −0.12 | 7.54 | 0 |
| Ethionamide | | 11.89 | 1.88 | 0.84 | 1 |
| Isoniazid | | 13.61 | −0.71 | 34.90 | 1 |

Table 2 | Relating quinolone structure (number of rings) to their solubility in water (DrugBank 2017)
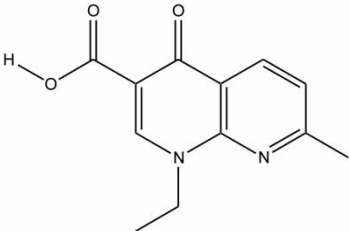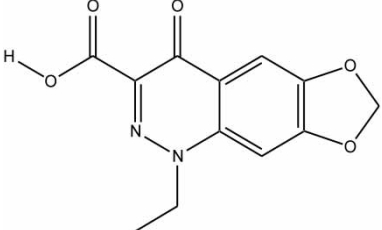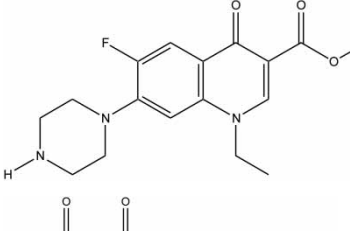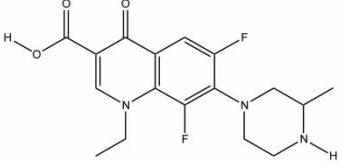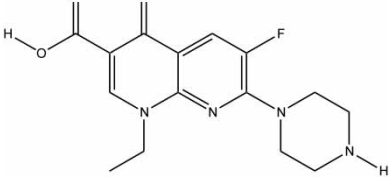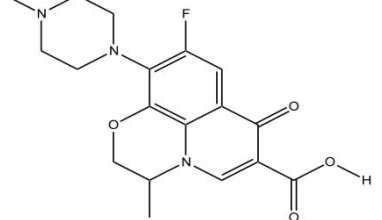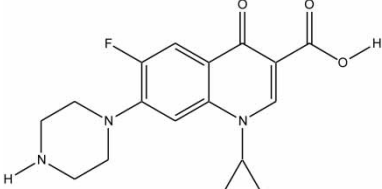
| Groups of quinolones | Class | Structure | Number of rings | Solubility in water (mg/mL) |
|----------------------|----------------|---|-----------------|-----------------------------|
| Nalidixic acid | 1st generation |  | 2 | 2.3 |
| Cinoxacin | |  | 3 | 0.96 |
| Norfloxacin | 2nd generation |  | 3 | 1.01 |
| Lomefloxacin | |  | 3 | 0.11 |
| Enoxacin | |  | 3 | 1.09 |
| Ofloxacin | |  | 4 | 1.44 |
| Ciprofloxacin | |  | 4 | 1.35 |

(continued)

Table 2 | continued

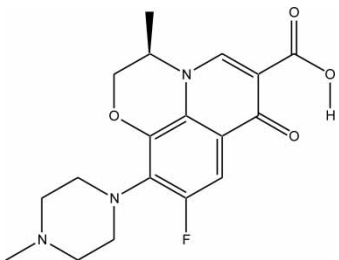
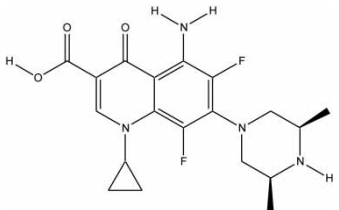
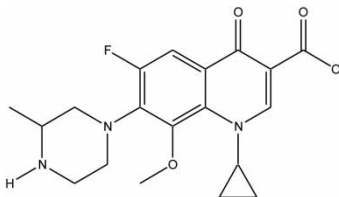
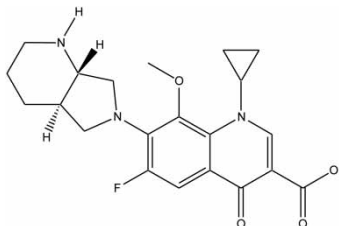
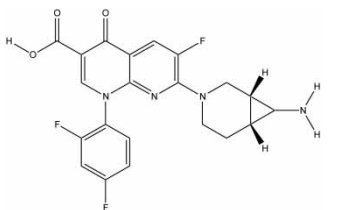
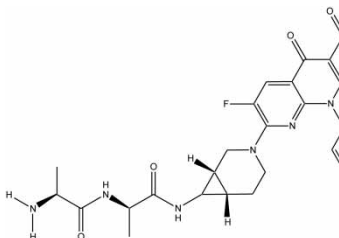
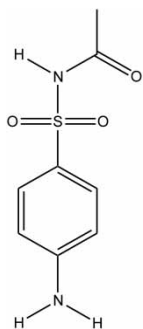
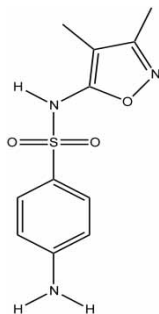
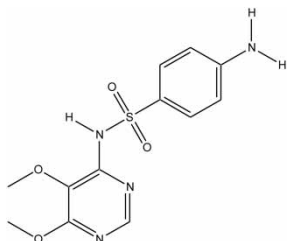
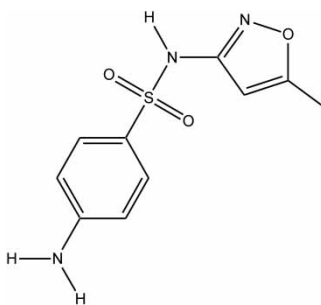
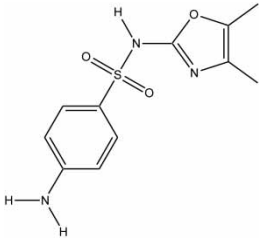
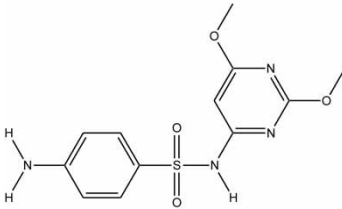
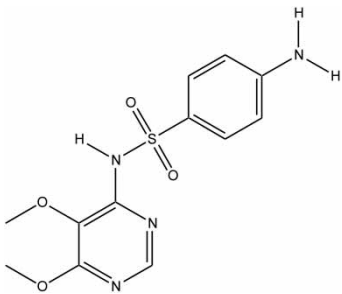
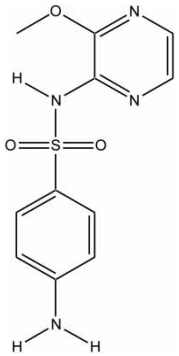
| Groups of quinolones | Class | Structure | Number of rings | Solubility in water (mg/mL) |
|----------------------|----------------|---|-----------------|-----------------------------|
| Levofloxacin | 3rd generation |  | 4 | 1.44 |
| Sparfloxacin | |  | 4 | 0.11 |
| Gatifloxacin | |  | 4 | 0.63 |
| Moxifloxacin | |  | 5 | 0.17 |
| Trovafoxacin | 4th generation |  | 5 | 0.07 |
| Alatrofloxacin | |  | 5 | 0.04 |

Table 3 | Relating sulphonamide structure (number of rings) to their solubility in water (DrugBank 2017)

| Groups of sulphonamide | Class | Structure | Number of rings | Solubility in water (mg/mL) |
|------------------------|---------------------|---|-----------------|-----------------------------|
| Sulfacetamide | Short acting |  | 1 | 4.21 |
| Sulfadiazine | |  | 2 | 0.60 |
| Sulfafurazole | |  | 2 | 0.31 |
| Sulfadoxine | Intermediate acting |  | 2 | 0.30 |
| Sulfamethoxazole | |  | 2 | 0.46 |

(continued)

Table 3 | continued

| Groups of sulphonamide | Class | Structure | Number of rings | Solubility in water (mg/mL) |
|------------------------|-------------------|---|-----------------|-----------------------------|
| Sulfamoxole | |  | 2 | 0.27 |
| Sulfadimethoxine | Long acting |  | 2 | 0.28 |
| Sulfadoxine | Ultra long acting |  | 2 | 0.30 |
| Sulfametopyrazine | |  | 2 | 0.41 |

Sulphonamide and quinolone extraction techniques from wastewater

In the fight against bacterial infection, sulphonamides were the pioneer group of drugs that achieved great success. The simplest and oldest form of sulphonamides is sulphanilamide, and all others are its derivatives, while quinolones are derivatives of nalidixic acid (Figures 1 and 2).

Sulphonamides and quinolones are mostly insoluble in water (Tables 2 and 3) at neutral pH and become more soluble in an acidic environment with high stability (Luo *et al.* 2011). The frequency of use of these antibiotics and their stability account especially for their detection in the aquatic environment (Senta *et al.* 2008).

SPE and LLE are widely used as a pre-concentration step. In SPE, analytes are extracted from liquid sample, based on the polarity of the compound. The analytes are

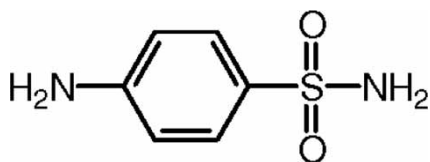


Figure 1 | Sulphanilamide.

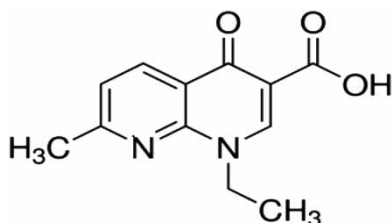


Figure 2 | Nalidixic acid.

retained on the sorbent, based on their affinity, and subsequently eluted for instrumental analysis. SPE makes use of a solid phase and a mobile phase to separate analytes based on their different degrees of affinity for the liquid or solid phase. SPE has been widely used with excellent recoveries (Mutavdžić Pavlović *et al.* 2010; Dorival-García *et al.* 2013; Płotka-Wasyłka *et al.* 2016), but is time consuming (conditioning, sample loading, washing and elution), especially when the sample volume is large (Płotka-Wasyłka *et al.* 2016).

LLE or solvent extraction is an extraction process that makes use of two immiscible solvents to separate compounds based on their relative solubility (Soniya & Muthuraman 2015). To the best of our knowledge, LLE has not been extensively used for the extraction of both sulphonamides and quinolones in recent years (after 2000). The drawbacks in pre-concentration have mainly been resolved. The use of a small volume of solvent in LLE enhances the efficiency and environmental friendliness (Gjelstad & Pedersen-Bjergaard 2013; Xing *et al.* 2015) and, in SPE, time required has been reduced in its further development with magnetic solid phase extraction (MSPE) and molecular imprinted polymers (MIPs) (Li *et al.* 2015).

Improvements in the traditional LLE and SPE methods are aimed at enhancing the speed and reducing the costs in the sample pre-concentration and adaptation to the analytical instrument to be used (Thurman & Snaveley 2000; Hanson 2013; Wen *et al.* 2014; Ahmad *et al.* 2015). These

advancements are exemplified in relation to efficiency and frequency of use with dispersive liquid-liquid microextraction (DLLME) and hollow-fiber liquid-phase microextraction (HF-LPME) for the LLE extraction and with MSPE and MIP for the SPE (Tables 4 and 5) (Vas & Vekey 2004; Prieto *et al.* 2011; Wen *et al.* 2014; Ebrahimpour *et al.* 2015). DLLME is a process in which two immiscible solvents (organic and aqueous) are used for the extraction of organic compounds from water samples, while HF-LPME involves the use of an acceptor solution concealed in a polypropylene fiber in an organic solvent (Sharifi *et al.* 2016).

Matrix effect on recovery

Matrix effect is the interference experienced as a result of the presence of other compounds that are not of interest when analyzing for the target substances at the instrumental detection point (Matuszewski *et al.* 2003; Petrović *et al.* 2005). The source of the samples is a determinant for the constituents, where, for example, wastewater from an animal farm will have different constituents compared with wastewater from a pharmaceutical company. Evaluation of the matrix effect is very important to ensure reliable analysis where co-elution of compounds can lead to signal enhancement or suppression and analytical inaccuracy (Bolong *et al.* 2009).

Several papers on matrix effect evaluation have been published (Lamble & Hill 1998; Matuszewski *et al.* 2003; Hamid & Eskicioglu 2012), and the most reliable with regard to antibiotics in water samples is the one where an isotope-labelled internal standard (surrogate) has been used (Zwiener & Frimmel 2004). These surrogates are not commercially available, and other methods, such as an external calibration method (addition of pure standard of analyte of interest at a fixed concentration) and standard addition method (addition of pure standard of analyte of interest at varying concentration), are used (Gros *et al.* 2006). In Table 4, Dasenaki & Thomaidis (2015) and Ye *et al.* (2007), compensated for the matrix effects using the standard addition method, while Pedrouzo *et al.* (2008) compared the use of both internal and external standard and obtained better results with the use of an internal standard. MIP possesses high selective properties, which enable reduction of the matrix

Table 4 | Comparisons between different extraction methods for the determination of sulphonamide in wastewater (extraction method abbreviations are given as a footnote to Table 5)

| Extraction methods | Extraction time (min) per sample volume (mL) | Solvent consumed per sample (mL) | Limit of detection (ng/L) | Matrices (sample source) | Percentage recovery (%) | References |
|---------------------|--|----------------------------------|--|---|--|---|
| SPE-HPLC-MS/MS | */50 mL | 12 | 6.6–22.0 | ^a . Wastewater influent ^b . Wastewater effluent | ^a . 38.5–78.1 ^b . 42.2–79.0 | Dasenaki & Thomaidis (2015), Pedrouzo <i>et al.</i> (2008), Ye <i>et al.</i> (2007), Peng <i>et al.</i> (2008) and Agunbiade & Moodley (2014) |
| SPE-HPLC-MS | 8 min/100 mL 20 min/250 mL | 9 | 20 | ^a . Wastewater influent ^b . Wastewater effluent | ^a . 25.0–56.0 ^b . 27.0–53.0 | |
| SPE-HPLC-MS/MS | 167 min/500 mL | 9 | 1–3 | Raw wastewater | 23.1–87.0 | |
| SPE-HPLC-DAD | 100 min/500 mL 30 min/150 mL | 29 | 70–80 200–250 | ^a . Wastewater influent ^b . Wastewater effluent | ^a . 64.0–72.0 ^b . 65.0–71.0 | |
| SPE-HPLC-DAD | 100 min/500 mL | 28 | 310 | Environmental water (river water) | 87.4–92.5 | |
| MIP-HPLC-MS/MS | 25 min/500 mL | 11 | 380–1,320 | Environmental water (river, lake, sewage water) | 76.8–32.8 | Chen <i>et al.</i> (2013), Lian <i>et al.</i> (2014) and Qin <i>et al.</i> (2012) |
| MIP-HPLC-DAD | 16 min/4 mL | 4 | 50 | Sea water | 88–79.2 | |
| MIP-HPLC-DAD | 333 min/500 mL | 7 | 4.1–19.3 | Wastewater influent | 84.1–98.6 | |
| MSPE-HPLC-UV | 15 min/500 mL | 6.5 | 20–30 | Environmental water (sewage effluent, tap water, lake water) | 70–102 | Sun <i>et al.</i> (2009), Li <i>et al.</i> (2007) and Tolmacheva <i>et al.</i> (2016) |
| MSPE-HPLC-UV | 35 min/150 mL | 4.5 | 150–350 | River water | 89–113 | |
| MSPE-HPLC-AD | 10 min/100 mL | 2.5 | 0.2–0.3 | River water | 84–105 | |
| DLLME-HPLC-DAD | 13 min/5 mL | 1.94 | +350–10,500 | Run off water | 78–117 | Herrera-Herrera <i>et al.</i> (2013), Xu <i>et al.</i> (2011) and Song <i>et al.</i> (2014) |
| DLLME-HPLC-FD | 12 min/10 mL | 1.05 | 10–20 | River water | 95–110 | |
| MA-DLLME-HPLC-UV | 1.5 min/2 mL | **0.1 | 330–850 | Environmental water (tap, pool, lake, river water) | 75.1–115.8 | |
| HF-LPME-HPLC-DAD-FD | 360 min/50 mL | 0.05 | +1,000–15,000 for DAD detection 300–33,000 for FD detection | Environmental water (wastewater influent, effluent, river water, tap water) | 36.2–101 | Payán <i>et al.</i> (2011b), Tao <i>et al.</i> (2009) and Yudthavorasit <i>et al.</i> (2011) |
| HF-LPME-HPLC-UV | 480 min/4 mL | 4.03 | 100–400 | Environmental water (fish, duck, pig farm water, river water) | 82.2–103.2 | |
| HF-LPME-UHPLC-MS/MS | 60 min/20 mL | 0.02 | 10–250 | River water | 79–118 | |

*Extraction time was not stated.

**0.16 g of ionic liquid was dissolved in 0.1 mL of acetonitrile.

+Poor detection limit as a result of the use of a less sensitive detector (DAD).

Table 5 | Comparative study of different types of extraction methodologies for the determination of fluoroquinolones in water

| Extraction methods | Extraction time (min) per sample/volume (mL) | Solvent consumed per sample (mL) | Limit of detection (ng/L) | Matrices (sample source) | Percentage recovery (%) | References |
|----------------------|--|----------------------------------|---------------------------|---|-------------------------|--|
| SPE-UPLC-MS/MS | 36 min/100 mL | 23 | 20–40 | Wastewaters (WWTP) | 98.5–103.9 | <i>Senta et al. (2008), Wang et al. (2010) and Dorival-García et al. (2013)</i> |
| SPE-HPLC-MS/MS | 40 min/200 mL | 14 | 6.5–13.2 | Wastewater (primary effluent) | 53–60 | |
| SPE-HPLC-MS/MS | 250 min/500 mL | 12 | 0.09–0.25 | Tap water | 61.4–91.3 | |
| ONLINE-MISPE-LC-FLD | 30 min/25 mL | 17.5 | 1–11 1–12 | Drinking water Fish farm water | 62–102 | <i>Rodríguez et al. (2011), Luaces et al. (2013) and Lian & Wang (2016)</i> |
| MISPE-FI-CL | 10 min/10 mL | 3 | 270 | Environmental water (mineral, tap and river water) | 84–119 | |
| MISPE-HPLC-FD | 20 min/5 mL | 2 | 200 | Sea water | 75.2–112.4 | |
| MSPE-HPLC-DAD | 17 min/50 mL | 0.5 | 50–120 | Environmental water (lake water, reservoir water) | 72.0–118 | <i>Liu et al. (2016), Huang et al. (2013) and Wu et al. (2016)</i> |
| MSPE-HPLC-DAD | 60 min/50 mL | 0.5 | 200–1,460 | Environmental water (lake water, reservoir water, surface water) | 52.1–104.5 | |
| MSPE-HPLC-UV | 9 min/10 ml | 0.4 | 200–1,000 | Environmental (tap water, river and lake) | 83.5–103.0 | |
| DLLME-LC-UV | 7 min/8 mL | 0.6 | 140–810 | Wastewater (wastewater from pharmaceutical factory) | 82.7–110.9 | <i>Yan et al. (2011), Vázquez et al. (2012) and Guan et al. (2016)</i> |
| DLLME-LC-FD | 19 min/10 mL | 0.5 | 0.8–13 | Ground water | 85–107 | |
| DLLME-UHPLC-MS/MS | 12 min/5 mL | 1.2 | 6–9.1 | Environmental water (tap water, river water, running water, wastewater) | 76.8–100 | |
| HF-LPME-UHPLC-MS/MS | 60 min/20 mL | 0.02 | 10–250 | River water | 78–118 | <i>Yudthavorasit et al. (2011), Payán et al. (2011a) and Denadai & Cass (2015)</i> |
| HF-LPME-HPLC-DAD-FD | 330 min/50 mL | 0.05 | 0.3–16 | Environmental water (river water, wastewater) | 97–100 | |
| HF-LPME-LC-QqQ-MS/MS | 4.5 min/0.5 mL | 0.05 | 5.3–31.8 | Environmental water (surface and wastewater) | 79.5–112 | |

Abbreviations for extraction methods: SPE-HPLC-MS/MS (solid phase extraction – high performance liquid chromatography tandem mass spectrometry); SPE-HPLC-DAD (solid phase extraction – high performance liquid chromatography – diode array detection); MIP-HPLC-MS/MS (molecular imprinted polymer high performance liquid chromatography tandem mass spectrometry); MIP-HPLC-DAD (molecular imprinted polymer high performance liquid chromatography diode array detection); MSPE-HPLC-UV (magnetic solid phase extraction – high performance liquid chromatography – ultraviolet light detection); MSPE-HPLC-AD (magnetic solid phase extraction – high performance liquid chromatography – amperometric detection); DLLME-HPLC-FD (dispersive liquid–liquid microextraction – high performance liquid chromatography – fluorescence detection); MA-DLLME-HPLC-UV (microwave assisted dispersive liquid–liquid microextraction – high performance liquid chromatography – ultraviolet light detection); HF-LPME-HPLC-DAD-FD (hollow-fiber liquid phase microextraction – high performance liquid chromatography – diode array detection tandem fluorescence detection); HF-LPME-HPLC-UV (hollow-fiber liquid phase microextraction – high performance liquid chromatography – ultraviolet light detection); HF-LPME-UHPLC-MS/MS (hollow-fiber liquid phase microextraction – ultra high performance liquid chromatography tandem mass spectrometry); HF-LPME-LC-QqQ-MS/MS (hollow-fiber liquid phase microextraction – ultra liquid chromatography triple-quadrupole tandem mass spectrometry); MISPE-FI-CL (molecularly imprinted polymer solid phase extraction – flow-injection chemiluminescence); ONLINE-MISPE-LC-FLD (online molecular imprinted solid phase extraction – liquid chromatography fluorescence detection); DLLME-LC-UV (dispersive liquid–liquid microextraction – liquid chromatography – ultraviolet light detection); DLLME-UHPLC-MS/MS (dispersive liquid–liquid microextraction – ultra high performance liquid chromatography tandem mass spectrometry).

effect significantly via targeted analyte sorbents. [Chen *et al.* \(2013\)](#) used external calibration to evaluate the reduction of the matrix effect of the MIP extract. Out of the papers reviewed, 25 made use of external calibration, while four utilized surrogate standards ([Castiglioni *et al.* 2005](#); [Senta *et al.* 2008](#); [Wang *et al.* 2010](#); [Dorival-García *et al.* 2013](#)) and one ([Renew & Huang 2004](#)) used both surrogate and standard addition methods. Despite the different sample sources, the recovery results presented here are reliable based on the use of one form of matrix check for result validation.

Solid phase extraction

SPE is currently more frequently used for sample clean-up in wastewater than previously due to enhanced ease of use and commercially available solid-phase sorbents with extraction kits including extraction manifolds. Sorbents packed in a cartridge are placed on the manifold, and the appropriate extraction solvent is used in the four-step extraction process. These steps are essentially: (1) conditioning of sorbent; (2) loading of sample; (3) washing of impurities (not in all cases); and (4) elution of the analyte.

Different types of sorbent can be used for the separation. The choice mainly depends on the chemical characteristics (polarity and functional group) of the analyte and the interaction of the functional groups of the analyte with the sorbent ([Babić *et al.* 2006](#); [Chen *et al.* 2010](#); [Mutavdžić Pavlović *et al.* 2010](#); [Plotka-Wasyłka *et al.* 2016](#)). Different sorbents have been used for the determination of many organic compounds, including different pharmaceuticals in water/wastewater environments ([Renew & Huang 2004](#); [Tong *et al.* 2009](#); [Jelic *et al.* 2011](#)).

Mainly the polymeric based sorbents (e.g. Oasis HLB and strata X) and the silica-based sorbents (e.g. Strata C18-E and C8) are preferred in wastewater analysis ([D'Archivio *et al.* 2007](#); [Mutavdžić Pavlović *et al.* 2010](#); [Masiá *et al.* 2014](#)). The polymeric based sorbents are preferred due to their compatibility with most analytes and their ability to perform within a broad pH range ([Karthikeyan & Meyer 2006](#); [Jiang *et al.* 2013](#); [Cheng *et al.* 2015](#); [Skendi *et al.* 2016](#)). The silica-based sorbents are restricted to more specific pH values within the neutral range. The silica in

the sorbent is unstable at both low and high pH values, where it tends to hydrolyze and thereby reduce the efficiency of the extraction process ([Kirkland *et al.* 1997](#)). Comparative assessments of sorbent efficiency have been carried out for optimal use in relation to the particular analyte of interest ([Mutavdžić *et al.* 2006](#); [Mutavdžić Pavlović *et al.* 2010](#); [Tayeb *et al.* 2015](#)). [Table 6](#) lists a few examples of the polymeric and silica-based sorbents used in the extraction of sulphonamides and fluoroquinolones from wastewater and aquatic recipients. [Hartig *et al.* \(1999\)](#) utilized LiChrolut EN SPE cartridges, which are polymeric sorbents, for the extraction of sulphonamides in secondary effluent and obtained a recovery between 77 and 100%. The polymeric sorbent Oasis hydrophilic-lipophilic (HLB) was used by [Tong *et al.* \(2009\)](#) for the extraction of 13 antibiotics, including sulfamerazine and ofloxacin. They obtained a recovery of over 90% for sulfamerazine, while the efficiency was much lower, 65%, for ofloxacin ([Table 6](#)). Non-specific/generic extraction methods tend to be advantageous (high recovery) to many antibiotics, while some may render low recoveries and require specific treatment, such as, for example, for ofloxacin ([Table 6](#)).

The highest recovery on the SPE was generally below 100% except for [Dorival-García *et al.* \(2013\)](#), which had a recovery of 103%. The advanced methods often gave 100% and above. The presence of phthalates from the SPE cartridges usually accounts for the above 100% recovery rates ([Table 6](#)). Since the choice of sorbent for SPE is based partly on economic considerations, further developments of the analytical procedure should account for this as well. The percentage recovery is calculated from the ratio of the experimental concentrations to the theoretical concentration of the antibiotics with reference to matrix effect elimination.

Modification and advancement in SPE ([Whang *et al.* 2012](#); [Xu & Lee 2012](#); [Zhu *et al.* 2013](#); [Li *et al.* 2015](#)) has included sorbent coating to enhance the performance, as exemplified by magnetic coatings ([Yu *et al.* 2013](#); [Zhang & Anderson 2014](#)) and micro extraction fibers ([Bagheri *et al.* 2012](#); [Pelit *et al.* 2015](#)). High recoveries have been obtained with magnetic adsorbents (MSPE), such as magnetic molecular imprinted polymer (MMIP) ([Mehdinia *et al.* 2011](#); [Herrero-Latorre *et al.* 2015](#)). These modifications have

Table 6 | Recovery of common SPE sorbents used for sulphonamide and fluoroquinolones

| Sorbent packaging | Sorbent mass/ sample volume | Matrices (sample source) | Antibiotics | Percentage recovery | Reference |
|--|--------------------------------|---|---|--|---|
| Oasis Hydrophilic-lipophilic (HLB) balanced | 60 mg/50 mL | Wastewater (swine wastewater) | Sulfamerazine Ofloxacin | 93%–98% 58–63% | Tong <i>et al.</i> (2009) |
| Oasis Hydrophilic-lipophilic (HLB) balanced | 60 mg/150 mL | Wastewater (municipal wastewater influent) | Sulfapyridine | 66–110% | Shaaban & Górecki (2012) |
| Anion-exchange cartridge (Isolute) + hydrophilic-lipophilic balanced (HLB) | 500 mg + 500 mg/1,000 mL | Wastewater (municipal wastewater effluent) | Ciprofloxacin Oxofloxacin | 90–154% 62–123% | Renew & Huang (2004) |
| Oasis Cation exchanger (MCX) | 60 mg/500 mL | Wastewater (municipal wastewater effluent) | Ciprofloxacin Oxofloxacin | 36–28% 3–25% | Castiglioni <i>et al.</i> (2005) |
| Oasis Hydrophilic-lipophilic (HLB) balanced | 500 mg/100 mL | Wastewater (municipal wastewater effluent) | Ciprofloxacin Oxofloxacin | 99–100% 99–102% | Dorival-García <i>et al.</i> (2013) |
| ^(a) Strata C8 | 200 mg/100 mL | Wastewater (water municipal wastewater effluent) | Sulfadiazine | ^(a) 37–47% ^(b) 28–40% | Mutavdžić Pavlović <i>et al.</i> (2010) |
| ^(b) Strata C18-E | | | Sulfamerazine | ^(a) 92–94% ^(b) 73–78% | |
| LiChrolut EN SPE cartridges | 200 mg/1,000 mL | Environmental water (water municipal wastewater effluent) | Sulfathiazole Sulfadiazine Sulfamerazine Sulfapyridine | 77–100% 88–107% 83–117% 77–97% | Hartig <i>et al.</i> (1999) |
| ^(a) Strata C8 | 200 mg/100 mL | Wastewater (water municipal wastewater effluent) | Norfloxacin | ^(a) 54–62% ^(b) 84–95% | Mutavdžić Pavlović <i>et al.</i> (2010) |
| ^(b) Strata C18-E | | | Sulfamerazine | ^(a) 71–74% ^(b) 97–99% | |

Note: Analysis utilized LC-MS/MS for the analysis and recovery percentages (ratio of experimental concentration to theoretical concentration).

partly taken over the traditional use of the SPE in sample pre-treatment.

Magnetic solid phase extraction

In the MSPE method, magnetic particles (MPs) are used as adsorbents. They are not packed into cartridges as in the traditional SPE, but are dispersed in the sample solutions to adsorb the analytes. A larger surface area to volume ratio is achieved, resulting in higher extraction efficiency. The ease of preparation of the MP adsorption step encourages its use (Šafaříková & Šafařík 1999). An external magnet is applied to collect the MPs and separate these from the liquid phase, as shown in Figure 3. This procedure excludes the need for time consuming centrifugations or filtrations of the sample during the clean-up process. It is a time and labor effective approach, overcoming the setbacks of the traditional SPE procedure, especially the sample loading step (Li *et al.* 2015). The MPs frequently used are ferrite- or iron-oxide nanoparticles and Fe_3O_4 (crystalline iron oxides of maghemite or magnetite). Other types of MPs include silica-based MPs used in the purification of DNA (Rittich & Španová 2013), alumina coated nanoparticles used for metal/metalloid pre-concentration and/or separation (Giakissikli &

Anthemidis 2013), MMIP (Chen *et al.* 2010) and also polydimethylsiloxane (PDMS) used for the determination of phthalate diesters in water samples (Jeddi *et al.* 2014).

After completion of the extraction process, the extract is subjected to further analysis, such as liquid chromatography-tandem mass spectrometry (LC-MS/MS), in order to detect and determine the analytes quantitatively and qualitatively. The reusability of the magnetic sorbent is ensured by regenerating it through washing with an organic solvent such as methanol (Sarafraz-Yazdi *et al.* 2015). The separation of MPs depends on the type of MPs (sorbents), and is connected with the interaction of analyte molecules with the surface functional groups of the sorbents, in a similar manner as the traditional extraction in the solid phase (Aguilar-Arteaga *et al.* 2010).

The mechanism of the MSPE is based on the different types of interaction between the analyte and the magnetic sorbent; ionic, dipole-dipole, dipole-induced dipole, hydrogen bonding and dispersion forces (Wierucka & Biziuk 2014; Shi & Ye 2015). Similarly to the traditional SPE, the reverse-phase sorbent of the MSPE is a weak polar or non-polar compound, and the interactions are mostly with hydrophobic compounds through Van der Waal forces. In the normal phase sorbent, polar compounds

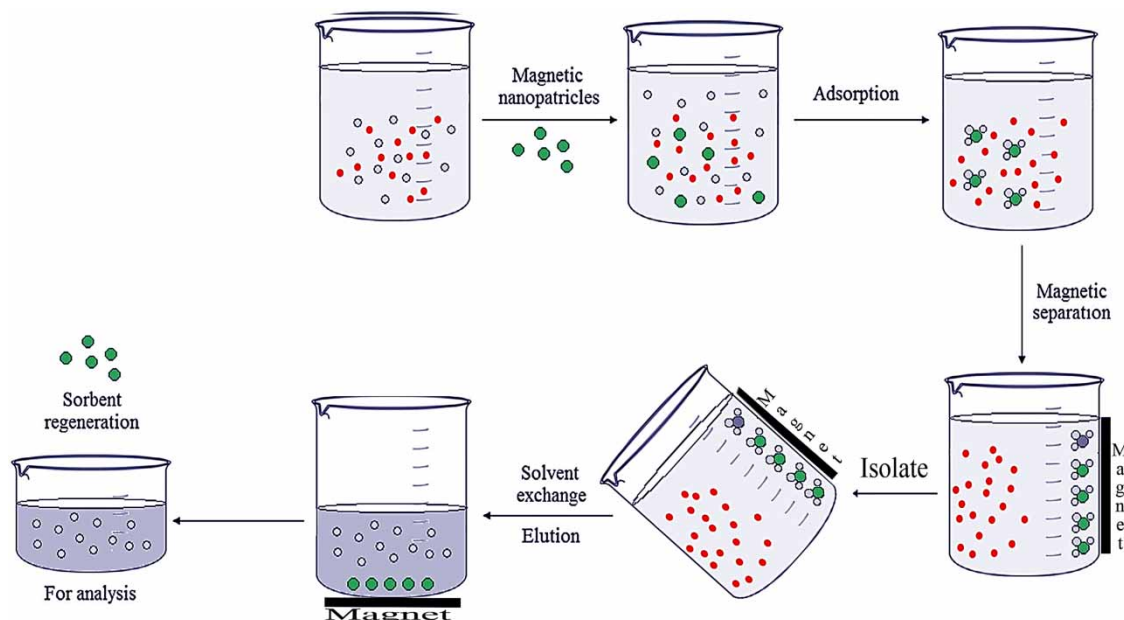


Figure 3 | Application for enriching analyte as MSPE-NP sorbent (Wierucka & Biziuk 2014).

are used as the stationary phase, and the mobile phase is non-polar. The interaction is based on hydrogen bonding, dipole-dipole interactions and π - π interactions. A good knowledge of the analyte of interest, such as ionization and solubility, will guide in the selection of sorbent for the extraction protocol. These properties would determine the level of affinity for the sorbent and the extraction efficiency of the analyte from the sample solution (Wierucka & Biziuk 2014).

Another important factor is the choice of the eluting solvent. To ensure effective and quantitative elution, the solvent should have the right elution strength that matches the desired analyte (Sun *et al.* 2009). The amount of solvent and time used for the MSPE is generally small when compared with other types of SPE and LLE (Tables 4 and 5). Sun *et al.* (2009) made use of a magnetic hemimicelles solid phase extraction (MMHSPE) for several sulfonamides from environmental water samples (Sun *et al.* 2009). The process was time effective, making use of 15 min/500 mL with low solvent consumption of 6.5 mL. In addition, a recovery of close to 100% with low standard deviation (within 1–6%) was recorded, indicating a better result when compared with other SPE processes used in the same category.

In addition to the better yield, the high efficiency of the regenerated MPs makes MSPE economical and unique in a wastewater environmental analyte clean-up process (Šafaříková & Šafařík 1999).

Molecular imprinted polymer

Another methodological extraction SPE-based alternative is the MIP. These are polymers that have been processed using the molecular imprinting technique, which leaves cavities in the polymer matrix with an affinity for a chosen 'template' molecule (Figueiredo *et al.* 2016). MIPs are prepared by forming complexes with a template molecule (target molecule or its derivatives) and a functional monomer(s) that either covalently or non-covalently links with the template molecule followed by co-polymerization in the presence of cross-linker (Takeuchi & Sunayama 2014). The efficiency of this method has been proven by many researchers; for example, Luaces *et al.* (2013) prepared fluoroquinolone-selective MIP beads for the determination

of trace amounts of enrofloxacin in environmental waters, and a recovery of 84–119% was recorded. Other records of the use of MIP in the determination of sulphonamides and quinolones are listed in Tables 4 and 5.

MMIPs are produced by coating MIPs with MPs such as Fe_3O_4 . The MMIPs possess the template-binding property of the MIP and the magnetic property of the MPs, hence making it a multifunctional method of extraction (Tan & Tong 2007; Zhou *et al.* 2010). The main difficulty encountered in the use of MIPs is the production, which includes template bleeding and cumbersome synthesis procedures (Figueiredo *et al.* 2016). Careful laboratory methods (synthesis of selective template) are currently being used for the production of templates (Luaces *et al.* 2013; Lian *et al.* 2014), but commercial availability of the imprinted polymer would make the use of MIPs much easier and faster. The possibility of making use of an external electrical current to generate the magnetic force needed in this extraction method, with the aim of generating an appropriate force to attract a particular analyte (based on their ionic charges) at a particular time, will greatly enhance the speed and efficiency of this method in the very near future.

Liquid-liquid extraction

As a result of the advancement in SPE (e.g., MSPE, MIP), conventional LLE is currently infrequently used, mainly due to three drawbacks: (1) time consuming extraction period; (2) cumbersome procedure and use of expensive glassware; (3) large quantity of extraction solvent needed.

Due to these drawbacks, literature references are limited on traditional LLE for clean-up of antibiotics in wastewater, especially for antibiotics like quinolones and sulphonamides. Specifically, after the year 2000, so far as we can ascertain, there is little or no available literature for the extraction of quinolones and sulphonamides in wastewater using LLE.

LLE is, however, still undergoing further development, as demonstrated by Leong *et al.* (2014) and others in the use of miniaturized pre-concentration techniques, and the use of dispersive liquid and phase extractions (Leong *et al.* 2014; Ahmad *et al.* 2015; Bendicho *et al.* 2015).

Micro-extraction techniques are environmentally friendly, less expensive and simple to operate, which has renewed the interest in a miniaturized LLE method. The improvements involve the reduction of the acceptor to donor phase ratio, thereby miniaturizing the solvent use (Sara-fraz-Yazdi & Amiri 2010) in the liquid-phase micro extraction (LPME) method. Several alternative methodological approaches exist: HF-LPME, DLLME and pressurized liquid extraction (PLE) are a few examples. PLE is an advanced form of LLME, not further detailed here (Li *et al.* 2013; Vazquez-Roig & Picó 2015). The extracts from the PLE method are mostly enhanced by a further clean-up procedure, which governs the recovery (Vazquez-Roig & Picó 2015).

Hollow-fiber liquid-phase microextraction

In HF-LPME, a hollow fiber containing an organic solvent is used to prevent direct mixing of acceptor solution with the sample solution (Hu *et al.* 2013), as illustrated in Figure 4, with the vial filled with the aqueous sample. A porous rod (typically made of polypropylene) placed in a glass vial is used as the main component in HF-LPME (Psillakis & Kalogerakis 2003). Before extraction, the porous rod (HF) is immersed in an organic solvent to immobilize this in the pores, and excess solvent is removed. A hydrophobic solvent is used as a thin barrier within the wall of the HF to ensure that the organic does not mix with the aqueous sample during the extraction process. Depending on the type of phase involved in HF-LPME, the acceptor solution can be either an 'organic solvent' in the hollow fiber, which makes it a two-phase extraction process, or an

acidic or alkaline 'aqueous solution', which makes it a three-phase extraction process.

In the two-phase extraction process, the targeted analytes are extracted from the aqueous sample into the organic solvent (acceptor solution) present both in the porous HF wall and inside the core of the HF. In the three-phase process, the analytes are extracted from the aqueous sample via the organic solvent in HF pores, then into the aqueous acceptor solution in the core of the HF (Sara-fraz-Yazdi & Amiri 2010).

The HF-LPME process has proven to be a simple, low cost, small solvent use sample preparation technique. The low solvent consumption is exemplified in the extraction of sulphonamides and quinolones in Tables 4 and 5. More specifically, Yudthavorasit *et al.* (2011) made use of 0.02 mL of solvent for the pre-concentration of 11 antibiotics, which included sulphonamides and quinolones, in 20 mL water samples. With this method, an excellent percentage recovery of 79–118% was recorded. Based on the assessment of the solvent consumed by other methods, HF-LPME uses the least solvent.

A prolonged contact time of 60 min and above between the aqueous sample and HF-LPME must be ensured to achieve maximum extraction of the intended analyte. This makes the process time consuming for the extraction of sulphonamides and quinolones when compared with other methods.

Dispersive liquid-liquid micro-extraction

The DLLME technique is generally based on the dispersion of extracting solvent in a sample matrix, and it is composed

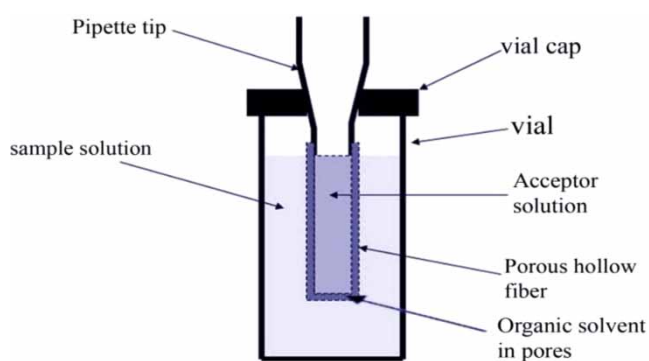


Figure 4 | Hollow-fiber liquid-phase microextraction (HF-LPME) (Gjelstad & Pedersen-Bjergaard 2013).



of a disperser solvent (an amphiphilic compound) that is applied to an aqueous sample to form a turbid solution. Extraction is achieved due to the large contact surface area between the droplets of the extractant solvent and the sample. After the introduction of the extractant, the sample mixture is centrifuged and the extraction solvent usually sediments at the bottom of the tube, after which it is drawn up with a micro syringe for further analysis (Herrera-Herrera *et al.* 2013). The simple extraction process and low consumption of organic solvent make the DLLME a good method of extraction. The main drawbacks of DLLME are its inability to extract hydrophilic compounds into the extraction solvent, the volume of samples restricted to the volume of the vial, and time spent in centrifugation (Tables 4 and 5). A maximum volume of 10 mL is mostly used for the analysis (Tables 4 and 5) and a larger volume would mean longer time of extraction. Current further developments deal with some of these constraints, where the centrifugation (which prevents automation) is replaced with the use of a process referred to as the ionic liquid-based DLLME, and the hydrophilic limitation is being investigated via the use of ion-pair based emulsification liquid phase micro extraction (IP ELPME) (Ebrahimpour *et al.* 2015).

SOCIETAL IMPACT

The release and persistence of antibiotic residues in the wastewater, receiving water bodies and the environment lead to the emergence of antimicrobial resistance among environmental isolates. This also triggers selection for antibiotic resistant genes. Quantitative and qualitative analysis of antibiotics in the environment is, therefore, vital for effective planning against the result of an ecological resistance pool effect and spread to humans through several transmission routes.

Different approaches have been employed by many researchers to quantify the antibiotic residues in the environment, mainly in the aquatic environment. Despite this being an issue of global concern, few reports are available on this study area, particularly from developing countries. This review presents a critical assessment of advances in methods of extraction evaluation for antibiotic micropollutants in wastewater with a focus on sulphonamides and

quinolones. A comparative analysis on these antibiotics in wastewater was done, using the few available reports, with a view to identifying quick and effective ways of extracting and quantifying them in the environment. Structural elucidation of various antibiotics with respect to their physicochemical properties was correlated with their solubility, towards enhancing the extraction protocols. Funding of research is mostly a great challenge; with the level of finance of developing nations in mind, and the fact that resistant bacteria are not boundary restricted, there is a need to develop an efficient and cost-effective method towards the quantification/identification of antibiotics in the environment. Valuable perspectives for improvement in these protocols based on a few existing gaps were presented.

CONCLUSION AND FUTURE TRENDS

The progress in the advancement in extraction methods over the last years is well documented and is constantly being updated in the literature.

The improvement in the LLE (DLLME, HF-LPME) has greatly reduced the volume of solvent used in the extraction process, thereby decreasing its environmental impact. However, the inability to reuse the solvent used in the process of extraction is a disadvantage, due to higher costs. Also, the centrifugation process of DLLME prevents direct automation, albeit several modalities are being researched (Herrera-Herrera *et al.* 2013).

MIP processes are very selective and sensitive for analytical methods, and the fact that they can be used to solve selectivity/sensitivity problems in a less cumbersome way makes them an efficient process of extraction, while the non-availability of commercial template and monomers makes the process less practicable. The polymers used in MIP are not like the conventional SPE sorbents that are universal, as the imprinted polymers must be synthesized for the specific analyte or class of analytes to be extracted.

The possibility of having a more robust and advanced sample preparation technique, which will utilize a highly selective filtration system, with an onsite filtration ability and a hybrid extraction method, which will involve an advanced method of both LLE and SPE, will create a less cumbersome process for the analytical chemist. An

automated highly sensitive and rugged analytical system that will be able to analyze samples with little or no pre-instrumental treatment, enhancing analyte quantification through reduction in analyte lost, will be of future interest.

FUNDING

This work was supported by the National Research Foundation and the SARChI Chair, Institute of Water and Wastewater Technology, Durban University of Technology, Durban, South Africa.

REFERENCES

- Acar, J. & Goldstein, F. 1997 Trends in bacterial resistance to fluoroquinolones. *Clinical Infectious Diseases* **24**, S67–S73.
- Aguilar-Arteaga, K., Rodriguez, J. A. & Barrado, E. 2010 Magnetic solids in analytical chemistry: a review. *Analytica Chimica Acta* **674**, 157–165.
- Agunbiade, F. O. & Moodley, B. 2014 Pharmaceuticals as emerging organic contaminants in Umgeni River Water System, Kwazulu-Natal, South Africa. *Environmental Monitoring and Assessment* **186**, 7273–7291.
- Ahmad, W., Al-Sibaai, A. A., Bashammakh, A. S., Alwael, H. & El-Shahawi, M. S. 2015 Recent advances in dispersive liquid-liquid microextraction for pesticide analysis. *TRAC Trends in Analytical Chemistry* **72**, 181–192.
- Alonso, C. A., Zarazaga, M., Ben Sallem, R., Jouini, A., Ben Slama, K. & Torres, C. 2017 Antibiotic resistance in *Escherichia coli* in husbandry animals. The African Perspective. *Letters in Applied Microbiology* **64**, 318–334.
- Babić, S., Ašperger, D., Mutavdžić, D., Horvat, A. J. M. & Kaštelan-Macan, M. 2006 Solid phase extraction and HPLC determination of veterinary pharmaceuticals in wastewater. *Talanta* **70**, 732–738.
- Bagheri, H., Piri-Moghadam, H. & Naderi, M. 2012 Towards greater mechanical, thermal and chemical stability in solid-phase microextraction. *TRAC Trends in Analytical Chemistry* **34**, 126–139.
- Baguer, A. J., Jensen, J. & Krogh, P. H. 2000 Effects of the antibiotics oxytetracycline and tylosin on soil fauna. *Chemosphere* **40**, 751–757.
- Batt, A. L. & Aga, D. S. 2005 Simultaneous analysis of multiple classes of antibiotics by ion trap LC/MS/MS for assessing surface water and groundwater contamination. *Analytical Chemistry* **77**, 2940–2947.
- Bendicho, C., Costas-Mora, I., Romero, V. & Lavilla, I. 2015 Nanoparticle-enhanced liquid-phase microextraction. *TRAC Trends in Analytical Chemistry* **68**, 78–87.
- Boehme, C. C., Nabeta, P., Hillemann, D., Nicol, M. P., Shenai, S., Krapp, F., Allen, J., Tahirli, R., Blakemore, R., Rustomjee, R., Milovic, A., Jones, M., O'Brien, S. M., Persing, D. H., Ruesch-Gerdes, S., Gotuzzo, E., Rodrigues, C., Alland, D. & Perkins, M. D. 2010 Rapid molecular detection of tuberculosis and rifampin resistance. *New England Journal of Medicine* **363**, 1005–1015.
- Bolong, N., Ismail, A., Salim, M. R. & Matsuura, T. 2009 A review of the effects of emerging contaminants in wastewater and options for their removal. *Desalination* **239**, 229–246.
- Buszewski, B. & Szultka, M. 2012 Past, present, and future of solid phase extraction: a review. *Critical Reviews in Analytical Chemistry* **42**, 198–213.
- Castiglioni, S., Bagnati, R., Calamari, D., Fanelli, R. & Zuccato, E. 2005 A multiresidue analytical method using solid-phase extraction and high-pressure liquid chromatography tandem mass spectrometry to measure pharmaceuticals of different therapeutic classes in urban wastewaters. *Journal of Chromatography A* **1092**, 206–215.
- Chang, X., Meyer, M. T., Liu, X., Zhao, Q., Chen, H., Chen, J.-A., Qiu, Z., Yang, L., Cao, J. & Shu, W. 2010 Determination of antibiotics in sewage from hospitals, nursery and slaughter house, wastewater treatment plant and source water in Chongqing region of Three Gorges Reservoir in China. *Environmental Pollution* **158**, 1444–1450.
- Chen, L., Zhang, X., Xu, Y., Du, X., Sun, X., Sun, L., Wang, H., Zhao, Q., Yu, A. & Zhang, H. 2010 Determination of fluoroquinolone antibiotics in environmental water samples based on magnetic molecularly imprinted polymer extraction followed by liquid chromatography–tandem mass spectrometry. *Analytica Chimica Acta* **662**, 31–38.
- Chen, H., Zhang, Y., Gao, B., Xu, Y., Zhao, Q., Hou, J., Yan, J., Li, G., Wang, H. & Ding, L. 2013 Fast determination of sulfonamides and their acetylated metabolites from environmental water based on magnetic molecularly imprinted polymers. *Environmental Science and Pollution Research* **20**, 8567–8578.
- Cheng, W., Jiang, L., Lu, N., Ma, L., Sun, X., Luo, Y., Lin, K. & Cui, C. 2015 Development of a method for trace level determination of antibiotics in drinking water sources by high performance liquid chromatography–tandem mass spectrometry. *Analytical Methods* **7**, 1777–1787.
- D'Archivio, A. A., Fanelli, M., Mazzeo, P. & Ruggieri, F. 2007 Comparison of different sorbents for multiresidue solid-phase extraction of 16 pesticides from groundwater coupled with high-performance liquid chromatography. *Talanta* **71**, 25–30.
- Dasenaki, M. E. & Thomaidis, N. S. 2015 Multianalyte method for the determination of pharmaceuticals in wastewater samples using solid-phase extraction and liquid chromatography–tandem mass spectrometry. *Analytical and Bioanalytical Chemistry* **407**, 4229–4245.
- Denadai, M. & Cass, Q. B. 2015 Simultaneous determination of fluoroquinolones in environmental water by liquid chromatography–tandem mass spectrometry with direct injection: a green approach. *Journal of Chromatography A* **1418**, 177–184.

- Dorival-García, N., Zafra-Gómez, A., Cantarero, S., Navalón, A. & Vílchez, J. 2013 Simultaneous determination of 13 quinolone antibiotic derivatives in wastewater samples using solid-phase extraction and ultra performance liquid chromatography–tandem mass spectrometry. *Microchemical Journal* **106**, 323–333.
- Drugbank 2017 Available from: <https://www.drugbank.ca> (accessed 19 January 2017).
- Dzomba, P., Zaranyika, M., Kugara, J. & Zhanda, T. 2014 Determination of oxytetracycline residues in untreated and treated drinking water in Bindura Town by RP-HPLC-UV visible spectrometry after ultrasonic assisted dispersive solid phase extraction (UA-DSPE). *World Journal of Pharmaceutical Research* **3** (2), 1568–1578.
- Ebrahimpour, B., Yamini, Y. & Rezazadeh, M. 2015 A sensitive emulsification liquid phase microextraction coupled with on-line phase separation followed by HPLC for trace determination of sulfonamides in water samples. *Environmental Monitoring and Assessment* **187**, 1–15.
- Eggen, T., Asp, T. N., Grave, K. & Hormazabal, V. 2011 Uptake and translocation of metformin, ciprofloxacin and narasin in forage-and crop plants. *Chemosphere* **85**, 26–33.
- Enne, V. I., Livermore, D. M., Stephens, P. & Hall, L. M. 2001 Persistence of sulphonamide resistance in *Escherichia coli* in the UK despite national prescribing restriction. *Lancet* **357**, 1325–1328.
- Errayess, S. A., Lahcen, A. A., Idrissi, L., Marcoaldi, C., Chiavarini, S. & Amine, A. 2017 A sensitive method for the determination of sulfonamides in seawater samples by solid phase extraction and UV–visible spectrophotometry. *Spectrochimica Acta Part A: Molecular and Biomolecular Spectroscopy* **181**, 276–285.
- Fick, J., Söderström, H., Lindberg, R. H., Phan, C., Tysklind, M. & Larsson, D. 2009 Contamination of surface, ground, and drinking water from pharmaceutical production. *Environmental Toxicology and Chemistry* **28**, 2522–2527.
- Figueiredo, L., Erny, G. L., Santos, L. & Alves, A. 2016 Applications of molecularly imprinted polymers to the analysis and removal of personal care products: a review. *Talanta* **146**, 754–765.
- Frey, S. K., Topp, E., Khan, I. U. H., Ball, B. R., Edwards, M., Gottschall, N., Sunohara, M. & Lapen, D. R. 2015 Quantitative *Campylobacter* spp., antibiotic resistance genes, and veterinary antibiotics in surface and ground water following manure application: influence of tile drainage control. *Science of the Total Environment* **532**, 138–153.
- Fuller, J. D. & Low, D. E. 2005 A review of *Streptococcus pneumoniae* infection treatment failures associated with fluoroquinolone resistance. *Clinical Infectious Diseases* **41**, 118–121.
- Gaugain, M., Chotard, M.-P. & Verdon, E. 2013 Stability study for 53 antibiotics in solution and in fortified biological matrices by LC/MS/MS. *Journal of AOAC International* **96**, 471–480.
- Giakisikli, G. & Anthemidis, A. N. 2013 Magnetic materials as sorbents for metal/metalloid preconcentration and/or separation. A review. *Analytica Chimica Acta* **789**, 1–16.
- Gjelstad, A. & Pedersen-Bjergaard, S. 2013 Perspective: hollow fibre liquid-phase microextraction—principles, performance, applicability, and future directions. *Scientia Chromatographica* **5**, 181–189.
- Gros, M., Petrović, M. & Barceló, D. 2006 Multi-residue analytical methods using LC-tandem MS for the determination of pharmaceuticals in environmental and wastewater samples: a review. *Analytical and Bioanalytical Chemistry* **386**, 941–952.
- Guan, J., Zhang, C., Wang, Y., Guo, Y., Huang, P. & Zhao, L. 2016 Simultaneous determination of 12 pharmaceuticals in water samples by ultrasound-assisted dispersive liquid–liquid microextraction coupled with ultra-high performance liquid chromatography with tandem mass spectrometry. *Analytical and Bioanalytical Chemistry* **408**, 8099–8109.
- Hamid, H. & Eskicioglu, C. 2012 Fate of estrogenic hormones in wastewater and sludge treatment: a review of properties and analytical detection techniques in sludge matrix. *Water Research* **46**, 5813–5833.
- Hanson, C. 2013 *Recent Advances in Liquid-Liquid Extraction*. Elsevier, The Netherlands.
- Hartig, C., Storm, T. & Jekel, M. 1999 Detection and identification of sulphonamide drugs in municipal waste water by liquid chromatography coupled with electrospray ionisation tandem mass spectrometry. *Journal of Chromatography A* **854**, 163–173.
- Herrera-Herrera, A. V., Hernández-Borges, J., Borges-Miquel, T. M. & Rodríguez-Delgado, M. Á. 2013 Dispersive liquid–liquid microextraction combined with ultra-high performance liquid chromatography for the simultaneous determination of 25 sulfonamide and quinolone antibiotics in water samples. *Journal of Pharmaceutical and Biomedical Analysis* **75**, 130–137.
- Herrero-Latorre, C., Barciela-García, J., García-Martín, S., Peña-Creciente, R. M. & Otárola-Jiménez, J. 2015 Magnetic solid-phase extraction using carbon nanotubes as sorbents: a review. *Analytica Chimica Acta* **892**, 10–26.
- Hu, B., He, M., Chen, B. & Xia, L. 2013 Liquid phase microextraction for the analysis of trace elements and their speciation. *Spectrochimica Acta Part B: Atomic Spectroscopy* **86**, 14–30.
- Huang, X., Wang, Y., Liu, Y. & Yuan, D. 2013 Preparation of magnetic poly (vinylimidazole-co-divinylbenzene) nanoparticles and their application in the trace analysis of fluoroquinolones in environmental water samples. *Journal of Separation Science* **36**, 3210–3219.
- Jeddi, M. Z., Ahmadkhanhiha, R., Yunesian, M. & Rastkari, N. 2014 Magnetic solid-phase extraction based on modified magnetic nanoparticles for the determination of phthalate diesters in water samples. *Journal of Chromatographic Science* **53**, 385–391.
- Jelic, A., Gros, M., Ginebreda, A., Cespedes-Sánchez, R., Ventura, F., Petrovic, M. & Barcelo, D. 2011 Occurrence, partition and removal of pharmaceuticals in sewage water and sludge during wastewater treatment. *Water Research* **45**, 1165–1176.
- Jiang, L., Hu, X., Xu, T., Zhang, H., Sheng, D. & Yin, D. 2013 Prevalence of antibiotic resistance genes and their relationship with antibiotics in the Huangpu River and the

- drinking water sources, Shanghai, China. *Science of the Total Environment* **458–460**, 267–272.
- Jones, O. A., Voulvoulis, N. & Lester, J. N. 2003 Potential impact of pharmaceuticals on environmental health. *Bulletin of the World Health Organization* **81**, 768–769.
- Jones, O. A., Lester, J. N. & Voulvoulis, N. 2005 Pharmaceuticals: a threat to drinking water? *Trends in Biotechnology* **23**, 163–167.
- Karthikeyan, K. & Meyer, M. T. 2006 Occurrence of antibiotics in wastewater treatment facilities in Wisconsin, USA. *Science of the Total Environment* **361**, 196–207.
- Kirkland, J. J., Henderson, J. W., Destefano, J. J., Van Straten, M. A. & Claessens, H. A. 1997 Stability of silica-based, endcapped columns with pH 7 and 11 mobile phases for reversed-phase high-performance liquid chromatography. *Journal of Chromatography A* **762**, 97–112.
- Knopp, M. M., Olesen, N. E., Holm, P., Langguth, P., Holm, R. & Rades, T. 2015 Influence of polymer molecular weight on drug–polymer solubility: a comparison between experimentally determined solubility in PVP and prediction derived from solubility in monomer. *Journal of Pharmaceutical Sciences* **104**, 2905–2912.
- Kumar, K., Gupta, S., Baidoo, S., Chander, Y. & Rosen, C. 2005 Antibiotic uptake by plants from soil fertilized with animal manure. *Journal of Environmental Quality* **34**, 2082–2085.
- Kümmerer, K. 2009 Antibiotics in the aquatic environment—A review—Part I. *Chemosphere* **75**, 417–434.
- Lamble, K. J. & Hill, S. J. 1998 Microwave digestion procedures for environmental matrices. Critical review. *Analyst* **123**, 103r–133r.
- Leong, M.-I., Fuh, M.-R. & Huang, S.-D. 2014 Beyond dispersive liquid–liquid microextraction. *Journal of Chromatography A* **1335**, 2–14.
- Li, J.-D., Cai, Y.-Q., Shi, Y.-L., Mou, S.-F. & Jiang, G.-B. 2007 Determination of sulfonamide compounds in sewage and river by mixed hemimicelles solid-phase extraction prior to liquid chromatography–spectrophotometry. *Journal of Chromatography A* **1139**, 178–184.
- Li, W., Shi, Y., Gao, L., Liu, J. & Cai, Y. 2013 Occurrence, distribution and potential affecting factors of antibiotics in sewage sludge of wastewater treatment plants in China. *Science of the Total Environment* **445**, 306–313.
- Li, J., Wang, Y.-B., Li, K.-Y., Cao, Y.-Q., Wu, S. & Wu, L. 2015 Advances in different configurations of solid-phase microextraction and their applications in food and environmental analysis. *TRAC Trends in Analytical Chemistry* **72**, 141–152.
- Lian, Z. & Wang, J. 2016 Determination of ciprofloxacin in Jiaozhou Bay using molecularly imprinted solid-phase extraction followed by high-performance liquid chromatography with fluorescence detection. *Marine Pollution Bulletin* **111**, 411–417.
- Lian, Z., He, X. & Wang, J. 2014 Determination of sulfadiazine in Jiaozhou Bay using molecularly imprinted solid-phase extraction followed by high-performance liquid chromatography with a diode-array detector. *Journal of Chromatography B* **957**, 53–59.
- Lindberg, R. H., Wennberg, P., Johansson, M. I., Tysklind, M. & Andersson, B. A. 2005 Screening of human antibiotic substances and determination of weekly mass flows in five sewage treatment plants in Sweden. *Environmental Science & Technology* **39**, 3421–3429.
- Lipinski, C. A., Lombardo, F., Dominy, B. W. & Feeney, P. J. 2012 Experimental and computational approaches to estimate solubility and permeability in drug discovery and development settings. *Advanced Drug Delivery Reviews* **64**, 4–17.
- Liu, C., Liao, Y. & Huang, X. 2016 Preparation of a boronic acid functionalized magnetic adsorbent for sensitive analysis of fluoroquinolones in environmental water samples. *Analytical Methods* **8**, 4744–4754.
- Luaces, M., Urraca, J., Pérez-Conde, M., Alfonso, N. M., Valdés-González, A., Gutiérrez, A. & Moreno-Bondi, M. 2013 Chemiluminescence analysis of enrofloxacin in surface water using the tris (1, 10-phenantroline)–ruthenium (II)/peroxydisulphate system and extraction with molecularly imprinted polymers. *Microchemical Journal* **110**, 458–464.
- Lukačšínová, M. & Bollenbach, T. 2017 Toward a quantitative understanding of antibiotic resistance evolution. *Current Opinion in Biotechnology* **46**, 90–97.
- Luo, Y., Xu, L., Rysz, M., Wang, Y., Zhang, H. & Alvarez, P. J. 2011 Occurrence and transport of tetracycline, sulfonamide, quinolone, and macrolide antibiotics in the Haihe River Basin, China. *Environmental Science & Technology* **45**, 1827–1833.
- Luo, Y., Guo, W., Ngo, H. H., Nghiem, L. D., Hai, F. I., Zhang, J., Liang, S. & Wang, X. C. 2014 A review on the occurrence of micropollutants in the aquatic environment and their fate and removal during wastewater treatment. *Science of the Total Environment* **473–474**, 619–641.
- Masiá, A., Campo, J., Blasco, C. & Picó, Y. 2014 Ultra-high performance liquid chromatography–quadrupole time-of-flight mass spectrometry to identify contaminants in water: an insight on environmental forensics. *Journal of Chromatography A* **1345**, 86–97.
- Matuszewski, B., Constanzer, M. & Chavez-Eng, C. 2003 Strategies for the assessment of matrix effect in quantitative bioanalytical methods based on HPLC–MS/MS. *Analytical Chemistry* **75**, 3019–3030.
- Mehdinia, A., Roohi, F. & Jabbari, A. 2011 Rapid magnetic solid phase extraction with *in situ* derivatization of methylmercury in seawater by Fe₃O₄/polyaniline nanoparticle. *Journal of Chromatography A* **1218**, 4269–4274.
- Michael, I., Rizzo, L., Mcardell, C., Manaia, C., Merlin, C., Schwartz, T., Dagot, C. & Fatta-Kassinos, D. 2013 Urban wastewater treatment plants as hotspots for the release of antibiotics in the environment: a review. *Water Research* **47**, 957–995.

- Mutavdžić, D., Babić, S., Ašperger, D., Horvat, A. & Kaštelan-Macan, M. 2006 Comparison of different solid-phase extraction materials for sample preparation in the analysis of veterinary drugs in water samples. *JPC-Journal of Planar Chromatography-Modern TLC* **19**, 454–462.
- Mutavdžić Pavlović, D., Babić, S., Dolar, D., Ašperger, D., Košutić, K., Horvat, A. J. & Kaštelan-Macan, M. 2010 Development and optimization of the SPE procedure for determination of pharmaceuticals in water samples by HPLC-diode array detection. *Journal of Separation Science* **33**, 258–267.
- Nabais, A. & Cardoso, J. 1995 Ultrafiltration of fermented broths and solvent extraction of antibiotics. *Bioprocess and Biosystems Engineering* **13**, 215–221.
- Namiešnik, J., Zabiegała, B., Kot-Wasik, A., Partyka, M. & Wasik, A. 2005 Passive sampling and/or extraction techniques in environmental analysis: a review. *Analytical and Bioanalytical Chemistry* **381**, 279–301.
- Ngumba, E., Gachanja, A. & Tuhkanen, T. 2016 Occurrence of selected antibiotics and antiretroviral drugs in Nairobi River Basin, Kenya. *Science of the Total Environment* **539**, 206–213.
- Olaitan, O. J., Anyakora, C., Bamiro, T. & Tella, A. T. 2014 Determination of pharmaceutical compounds in surface and underground water by solid phase extraction-liquid chromatography. *Journal of Environmental Chemistry and Ecotoxicology* **6**, 20–26.
- Ort, C., Lawrence, M. G., Rieckermann, J. R. & Joss, A. 2010 Sampling for pharmaceuticals and personal care products (PPCPs) and illicit drugs in wastewater systems: are your conclusions valid? A critical review. *Environmental Science & Technology* **44**, 6024–6035.
- Pavlović, D. M., Babić, S., Horvat, A. J. & Kaštelan-Macan, M. 2007 Sample preparation in analysis of pharmaceuticals. *TRAC Trends in Analytical Chemistry* **26**, 1062–1075.
- Payán, M. R., López, M. Á. B., Fernández-Torres, R., González, J. A. O. & Mochón, M. C. 2011a Hollow fiber-based liquid phase microextraction (HF-LPME) as a new approach for the HPLC determination of fluoroquinolones in biological and environmental matrices. *Journal of Pharmaceutical and Biomedical Analysis* **55**, 332–341.
- Payán, M. R., López, M. Á. B., Fernández-Torres, R., Navarro, M. V. & Mochón, M. C. 2011b Hollow fiber-based liquid phase microextraction (HF-LPME) for a highly sensitive HPLC determination of sulfonamides and their main metabolites. *Journal of Chromatography B* **879**, 197–204.
- Pedrouzo, M., Borrull, F., Marcé, R. M. & Pocurull, E. 2008 Simultaneous determination of macrolides, sulfonamides, and other pharmaceuticals in water samples by solid-phase extraction and LC-(ESI) MS. *Journal of Separation Science* **31**, 2182–2188.
- Pelit, F. O., Pelit, L., Dizdaş, T. N., Aftaşa, C., Ertaş, H., Yalçınkaya, E. E., Türkmen, H. & Ertaş, F. N. 2015 A novel polythiophene – ionic liquid modified clay composite solid phase microextraction fiber: preparation, characterization and application to pesticide analysis. *Analytica Chimica Acta* **859**, 37–45.
- Peng, X., Tan, J., Tang, C., Yu, Y. & Wang, Z. 2008 Multiresidue determination of fluoroquinolone, sulfonamide, trimethoprim, and chloramphenicol antibiotics in urban waters in China. *Environmental Toxicology and Chemistry* **27**, 73–79.
- Pereyre, S., Goret, J. & Bébéar, C. 2016 *Mycoplasma pneumoniae*: current knowledge on macrolide resistance and treatment. *Frontiers in Microbiology* **7**, 974–989.
- Petrović, M., Hernando, M. D., Díaz-Cruz, M. S. & Barceló, D. 2005 Liquid chromatography–tandem mass spectrometry for the analysis of pharmaceutical residues in environmental samples: a review. *Journal of Chromatography A* **1067**, 1–14.
- Plotka-Wasyłka, J., Szczepańska, N., De La Guardia, M. & Namiešnik, J. 2016 Modern trends in solid phase extraction: new sorbent media. *TRAC Trends in Analytical Chemistry* **77**, 23–43.
- Pribul, B. R., Festivo, M. L., Rodrigues, M. S., Costa, R. G., Rodrigues, E. C. D. P., De Souza, M. M. & Rodrigues, D. D. P. 2017 Characteristics of quinolone resistance in *Salmonella* spp. isolates from the food chain in Brazil. *Frontiers in Microbiology* **8**, 299.
- Prieto, A., Schrader, S., Bauer, C. & Möder, M. 2011 Synthesis of a molecularly imprinted polymer and its application for microextraction by packed sorbent for the determination of fluoroquinolone related compounds in water. *Analytica Chimica Acta* **685**, 146–152.
- Pruden, A., Larsson, D. J., Amézquita, A., Collignon, P., Brandt, K. K., Graham, D. W., Lazorchak, J. M., Suzuki, S., Silley, P. & Snape, J. R. 2013 Management options for reducing the release of antibiotics and antibiotic resistance genes to the environment. *Environmental Health Perspectives (Online)* **121**, 878–886.
- Psillakis, E. & Kalogerakis, N. 2003 Developments in liquid-phase microextraction. *TRAC Trends in Analytical Chemistry* **22**, 565–574.
- Qiang, Z. & Adams, C. 2004 Potentiometric determination of acid dissociation constants (pKa) for human and veterinary antibiotics. *Water Research* **38**, 2874–2890.
- Qin, S., Deng, S., Su, L. & Wang, P. 2012 Simultaneous determination of five sulfonamides in wastewater using group-selective molecularly imprinted solid-phase extraction coupled with HPLC-DAD. *Analytical Methods* **4**, 4278–4283.
- Renew, J. E. & Huang, C.-H. 2004 Simultaneous determination of fluoroquinolone, sulfonamide, and trimethoprim antibiotics in wastewater using tandem solid phase extraction and liquid chromatography–electrospray mass spectrometry. *Journal of Chromatography A* **1042**, 113–121.
- Rittich, B. & Španová, A. 2013 SPE and purification of DNA using magnetic particles. *Journal of Separation Science* **36**, 2472–2485.
- Rocha, I. V., Das Neves Andrade, C. A., De Lima Campos, T., Rezende, A. M., Leal, N. C., De Lacerda Vidal, C. F. &

- Xavier, D. E. 2017 Ciprofloxacin-resistant and extended-spectrum β -lactamase-producing *Escherichia coli* ST410 strain carrying the *mcr-1* gene associated with bloodstream infection. *International Journal of Antimicrobial Agents* **49** (5), 655–656.
- Rodríguez, E., Navarro-Villoslada, F., Benito-Peña, E., Marazuela, M. A. D. & Moreno-Bondi, M. C. 2011 Multiresidue determination of ultratrace levels of fluoroquinolone antimicrobials in drinking and aquaculture water samples by automated online molecularly imprinted solid phase extraction and liquid chromatography. *Analytical Chemistry* **83**, 2046–2055.
- Rodríguez-Mozaz, S., Chamorro, S., Martí, E., Huerta, B., Gros, M., Sánchez-Melsió, A., Borrego, C. M., Barceló, D. & Balcázar, J. L. 2015 Occurrence of antibiotics and antibiotic resistance genes in hospital and urban wastewaters and their impact on the receiving river. *Water Research* **69**, 234–242.
- Šafaříková, M. & Šafařík, I. 1999 Magnetic solid-phase extraction. *Journal of Magnetism and Magnetic Materials* **194**, 108–112.
- Sanghvi, T., Jain, N., Yang, G. & Yalkowsky, S. H. 2003 Estimation of aqueous solubility by the general solubility equation (GSE) the easy way. *QSAR & Combinatorial Science* **22**, 258–262.
- Sarafraz-Yazdi, A. & Amiri, A. 2010 Liquid-phase microextraction. *TRAC Trends in Analytical Chemistry* **29**, 1–14.
- Sarafraz-Yazdi, A., Rokhian, T., Amiri, A. & Ghaemi, F. 2015 Carbon nanofibers decorated with magnetic nanoparticles as a new sorbent for the magnetic solid phase extraction of selected polycyclic aromatic hydrocarbons from water samples. *New Journal of Chemistry* **39**, 5621–5627.
- Seifrtová, M., Nováková, L., Lino, C., Pena, A. & Solich, P. 2009 An overview of analytical methodologies for the determination of antibiotics in environmental waters. *Analytica Chimica Acta* **649**, 158–179.
- Senta, I., Terzić, S. & Ahel, M. 2008 Simultaneous determination of sulfonamides, fluoroquinolones, macrolides and trimethoprim in wastewater and river water by LC-tandem-MS. *Chromatographia* **68**, 747–758.
- Shaaban, H. & Górecki, T. 2012 Optimization and validation of a fast ultrahigh-pressure liquid chromatographic method for simultaneous determination of selected sulphonamides in water samples using a fully porous sub-2 μm column at elevated temperature. *Journal of Separation Science* **35**, 216–224.
- Sharifi, V., Abbasi, A. & Nosrati, A. 2016 Application of hollow fiber liquid phase microextraction and dispersive liquid-liquid microextraction techniques in analytical toxicology. *Journal of Food and Drug Analysis* **24**, 264–276.
- Shi, P. & Ye, N. 2015 Investigation of the adsorption mechanism and preconcentration of sulfonamides using a porphyrin-functionalized Fe_3O_4 -graphene oxide nanocomposite. *Talanta* **143**, 219–225.
- Singer, R. S., Finch, R., Wegener, H. C., Bywater, R., Walters, J. & Lipsitch, M. 2003 Antibiotic resistance – the interplay between antibiotic use in animals and human beings. *The Lancet Infectious Diseases* **3**, 47–51.
- Skendi, A., Irakli, M. N. & Papageorgiou, M. D. 2016 Optimized and validated high-performance liquid chromatography method for the determination of deoxynivalenol and aflatoxins in cereals. *Journal of Separation Science* **39**, 1425–1432.
- Song, Y., Wu, L., Lu, C., Li, N., Hu, M. & Wang, Z. 2014 Microwave-assisted liquid-liquid microextraction based on solidification of ionic liquid for the determination of sulfonamides in environmental water samples. *Journal of Separation Science* **37**, 3533–3538.
- Soniya, M. & Muthuraman, G. 2015 Comparative study between liquid-liquid extraction and bulk liquid membrane for the removal and recovery of methylene blue from wastewater. *Journal of Industrial and Engineering Chemistry* **30**, 266–273.
- Sun, L., Chen, L., Sun, X., Du, X., Yue, Y., He, D., Xu, H., Zeng, Q., Wang, H. & Ding, L. 2009 Analysis of sulfonamides in environmental water samples based on magnetic mixed hemimicelles solid-phase extraction coupled with HPLC–UV detection. *Chemosphere* **77**, 1306–1312.
- Takeuchi, T. & Sunayama, H. 2014 Molecularly imprinted polymers. In: *Encyclopedia of Polymeric Nanomaterials* (S. Kobayashi & K. Müllen, eds). Springer, Berlin, Heidelberg.
- Tan, C. J. & Tong, Y. W. 2007 Preparation of superparamagnetic ribonuclease A surface-imprinted submicrometer particles for protein recognition in aqueous media. *Analytical Chemistry* **79**, 299–306.
- Tao, Y., Liu, J.-F., Hu, X.-L., Li, H.-C., Wang, T. & Jiang, G.-B. 2009 Hollow fiber supported ionic liquid membrane microextraction for determination of sulfonamides in environmental water samples by high-performance liquid chromatography. *Journal of Chromatography A* **1216**, 6259–6266.
- Tayeb, M., Ismail, B. & Khairiatul Mardiana, J. 2015 Comparison of four different solid phase extraction cartridges for sample clean-up in the analysis of glufosinate ammonium from aqueous samples. *International Journal of Chemtech Research* **7**, 2612–2619.
- Thurman, E. & Snively, K. 2000 Advances in solid-phase extraction disks for environmental chemistry. *TRAC Trends in Analytical Chemistry* **19**, 18–26.
- Tolmacheva, V. V., Apyari, V. V., Furlotov, A. A., Dmitrienko, S. G. & Zolotov, Y. A. 2016 Facile synthesis of magnetic hypercrosslinked polystyrene and its application in the magnetic solid-phase extraction of sulfonamides from water and milk samples before their HPLC determination. *Talanta* **152**, 203–210.
- Tong, L., Li, P., Wang, Y. & Zhu, K. 2009 Analysis of veterinary antibiotic residues in swine wastewater and environmental water samples using optimized SPE-LC/MS/MS. *Chemosphere* **74**, 1090–1097.
- Toumi, J., Miladi, B., Farhat, A., Nouira, S., Hamdi, M., Gtari, M. & Bouallagui, H. 2015 Microbial ecology overview during anaerobic codigestion of dairy wastewater and cattle manure

- and use in agriculture of obtained bio-fertilisers. *Bioresource Technology* **198**, 141–149.
- Van Boeckel, T. P., Gandra, S., Ashok, A., Caudron, Q., Grenfell, B. T., Levin, S. A. & Laxminarayan, R. 2014 Global antibiotic consumption 2000 to 2010: an analysis of national pharmaceutical sales data. *The Lancet Infectious Diseases* **14**, 742–750.
- Van Boeckel, T. P., Brower, C., Gilbert, M., Grenfell, B. T., Levin, S. A., Robinson, T. P., Teillant, A. & Laxminarayan, R. 2015 Global trends in antimicrobial use in food animals. *Proceedings of the National Academy of Sciences* **112**, 5649–5654.
- Vas, G. & Vekey, K. 2004 Solid-phase microextraction: a powerful sample preparation tool prior to mass spectrometric analysis. *Journal of Mass Spectrometry* **39**, 233–254.
- Vázquez, M. P., Vázquez, P. P., Galera, M. M. & García, M. G. 2012 Determination of eight fluoroquinolones in groundwater samples with ultrasound-assisted ionic liquid dispersive liquid–liquid microextraction prior to high-performance liquid chromatography and fluorescence detection. *Analytica Chimica Acta* **748**, 20–27.
- Vazquez-Roig, P. & Picó, Y. 2015 Pressurized liquid extraction of organic contaminants in environmental and food samples. *TRAC Trends in Analytical Chemistry* **71**, 55–64.
- Venglovsky, J., Sasakova, N. & Placha, I. 2009 Pathogens and antibiotic residues in animal manures and hygienic and ecological risks related to subsequent land application. *Bioresource Technology* **100**, 5386–5391.
- Wang, Q.-J., Mo, C.-H., Li, Y.-W., Gao, P., Tai, Y.-P., Zhang, Y., Ruan, Z.-L. & Xu, J.-W. 2010 Determination of four fluoroquinolone antibiotics in tap water in Guangzhou and Macao. *Environmental Pollution* **158**, 2350–2358.
- Wei, X., Wang, Z., Fan, F., Wang, J. & Wang, S. 2010 Advanced treatment of a complex pharmaceutical wastewater by nanofiltration: membrane foulant identification and cleaning. *Desalination* **251**, 167–175.
- Wen, Y., Chen, L., Li, J., Liu, D. & Chen, L. 2014 Recent advances in solid-phase sorbents for sample preparation prior to chromatographic analysis. *TRAC Trends in Analytical Chemistry* **59**, 26–41.
- Whang, C.-W., Jen, J.-F. & Kumar, P. 2012 Recent advances in solid-phase microextraction for environmental applications-3.32. *Reference Module in Chemistry, Molecular Sciences and Chemical Engineering* **3**, 629–656.
- Wierucka, M. & Biziuk, M. 2014 Application of magnetic nanoparticles for magnetic solid-phase extraction in preparing biological, environmental and food samples. *TRAC Trends in Analytical Chemistry* **59**, 50–58.
- Wu, H., Shi, Y., Guo, X., Zhao, S., Du, J., Jia, H., He, L. & Du, L. 2016 Determination and removal of sulfonamides and quinolones from environmental water samples using magnetic adsorbents. *Journal of Separation Science* **39**, 4398–4407.
- Xing, H. Z., Wang, X., Chen, X. F., Wang, M. L. & Zhao, R. S. 2015 Accelerated solvent extraction combined with dispersive liquid–liquid microextraction before gas chromatography with mass spectrometry for the sensitive determination of phenols in soil samples. *Journal of Separation Science* **38**, 1419–1425.
- Xu, L. & Lee, H. 2012 Sorbent-phase sample preparation in environmental analysis. *Scholarbank@Nus* **3**, 541–567.
- Xu, X., Su, R., Zhao, X., Liu, Z., Zhang, Y., Li, D., Li, X., Zhang, H. & Wang, Z. 2011 Ionic liquid-based microwave-assisted dispersive liquid–liquid microextraction and derivatization of sulfonamides in river water, honey, milk, and animal plasma. *Analytica Chimica Acta* **707**, 92–99.
- Yan, H., Wang, H., Qin, X., Liu, B. & Du, J. 2011 Ultrasound-assisted dispersive liquid–liquid microextraction for determination of fluoroquinolones in pharmaceutical wastewater. *Journal of Pharmaceutical and Biomedical Analysis* **54**, 53–57.
- Ye, S., Yao, Z., Na, G., Wang, J. & Ma, D. 2007 Rapid simultaneous determination of 14 sulfonamides in wastewater by liquid chromatography tandem mass spectrometry. *Journal of Separation Science* **30**, 2360–2369.
- Yu, H., Ho, T. D. & Anderson, J. L. 2013 Ionic liquid and polymeric ionic liquid coatings in solid-phase microextraction. *TRAC Trends in Analytical Chemistry* **45**, 219–232.
- Yudthavorasit, S., ChiaoChan, C. & Leepipatpiboon, N. 2011 Simultaneous determination of multi-class antibiotic residues in water using carrier-mediated hollow-fiber liquid-phase microextraction coupled with ultra-high performance liquid chromatography tandem mass spectrometry. *Microchimica Acta* **172**, 39–49.
- Zhang, C. & Anderson, J. L. 2014 Polymeric ionic liquid bucky gels as sorbent coatings for solid-phase microextraction. *Journal of Chromatography A* **1344**, 15–22.
- Zhou, W.-H., Lu, C.-H., Guo, X.-C., Chen, F.-R., Yang, H.-H. & Wang, X.-R. 2010 Mussel-inspired molecularly imprinted polymer coating superparamagnetic nanoparticles for protein recognition. *Journal of Materials Chemistry* **20**, 880–883.
- Zhu, F., Xu, J., Ke, Y., Huang, S., Zeng, F., Luan, T. & Ouyang, G. 2013 Applications of *in vivo* and *in vitro* solid-phase microextraction techniques in plant analysis: a review. *Analytica Chimica Acta* **794**, 1–14.
- Zwiener, C. & Frimmel, F. H. 2004 LC-MS analysis in the aquatic environment and in water treatment technology—a critical review. *Analytical and Bioanalytical Chemistry* **378**, 862–874.

First received 26 April 2017; accepted in revised form 30 July 2017. Available online 15 September 2017