

WHOLE-BODY OPERATIONAL SPACE CONTROL FOR LOCOMOTION AND MANIPULATION

BY LUIS SENTIS, Ph.D.
HUMAN CENTERED ROBOTICS LAB,
THE UNIVERSITY OF TEXAS AT AUSTIN

In [Fingar, 2008], the US National Intelligence Council reported six potentially disruptive technologies for the year 2025, one of them being service robotics. The report states that, “[...] robots for elder care applications and the development of human augmentation technologies, mean that robots could be working alongside humans in looking after and rehabilitating people.” On a related note, the European company Fatronik published a study [Eizmendi, 2007] showing that by age 80, 42% of the Spanish population is currently disabled. Looking at population pyramids and expected population growth, we could expect that by the year 2100, more than 1 billion people will be disabled worldwide. It is in light of those statistics that service robotics may play a major role in providing life comfort after losing mobility. In this context, the Human Centered Robotics Lab (HCRL) at the University of Texas at Austin is interested in the study of robotic systems for the assistance, augmentation, and



FIGURE 1 Depiction of NASA's Valkyrie humanoid robot working alongside humans in firefighting activities.

representation of people to increase their social comfort, productivity, security and health.

HUMANOID ROBOTS FOR FIREFIGHTING

The US Office of Naval Research has a comprehensive program in Cognitive Science and Human Robot Interaction. One of its main missions is to develop a robotic workforce that

supports firefighting operations in Navy vessels. In 2012, the US Navy lost a Los Angeles class nuclear submarine due to an arson fire. Seven firefighters suffered from injuries. The vessel was irreparable and ultimately decommissioned in 2013. Events like this and other emergency scenarios greatly motivate the use of robotic systems that can skillfully move in cluttered spaces. The Human Centered Robotics Lab works with the US Office of Naval Research to study legged mobility and physical human robot interaction. Bipedal locomotion dates back to the 1970s in the former Yugoslavia [Vukobratovic, 2005] with the introduction of center of pressure models to describe human gait. It was followed by work on humanoid robots by Japanese researchers in the early 1970s [Kato, 1973], Honda Co. [Hirose, 2001] and the Japanese Ministry of Science and Technology [Kajita, 2002] based on a simple locomotion model called the Linear Inverted Pendulum Model. MIT pioneered agile bipedal locomotion using Rule Based Methods that enabled robots to run, jump and perform flips in the air [Raibert, 1984].

Sampling based methods have been successful for slow climbing [Bretl, 2005] and quasi-static mobility in rough terrains [Hauser, 2008] but not fast enough for fall recovery. Point foot robots have been recently able to balance unsupported [Ramezani, 2015, Buss, 2014]. Despite those advancements, we lack a general feedback control and planning framework that is not specialized to one type of agility. We also lack realtime plug and play control middleware for legged robots. In 2012 we started building a teen size bipedal robot, Hume (see **Figure 2**) equipped with series elastic actuators for fundamental studies on agility. Series elastic actuators are a technology developed by [Pratt, 1995] which adds a spring in series with an actuator's mechanical output. Its advantages or disadvantages over more rigid actuators are greatly disputed but there is a consensus that they better protect legged robots against shocks and that they provide better force control at low frequencies than rigid actuators equipped with load cells. Point foot bipeds are very interest-



FIGURE 2 The Hume biped robot designed by the Human Centered Robotics Lab and Meka Inc. for mobility in cluttered environments.



FIGURE 3 The UT-SEA Actuator Concept implemented in NASA's Valkyrie lower leg.

ing because they are relatively simple to build and excellent for testing dynamic balance.

To accomplish biped locomotion, a strong focus needs to be put forth at three levels: motion planning for foot placement, body pose estimation, and feedback control of the stance and swinging legs. This process is much different than in mobile manipulation systems, in that bipeds are underactuated systems that will fall very quickly if their feet don't regulate the walk. Equally importantly, body pose estimation is difficult because it needs to rely on inertial data, which suffers from drift when resolving the robot's global pose. When the above three technologies are achieved, for instance using a multi-body physics based simulation environment [Haan, 2009], there is still a long haul until the real robot can balance. This issue is a big hurdle because it leads to naive assumptions that ultimately achieve poor performance in the hardware. The cause of the divide between simulations and hardware is rooted in several key issues: (1) the increased use of expensive control algorithms which introduce realtime delays on the feedback servo processes; (2) the lack of passivity properties of force controlled actuators; (3) the design of slow serial communication processes which introduce additional servo latencies; and (4) the use of inaccurate models for kinematics and dynamics. We will discuss the first two issues below.

HIGH DIMENSIONAL CONTROL ALGORITHMS

Whole-body control algorithms [Sentis, 2007] consider the floating base rigid body dynamics of robots with physical constraints [Jain, 1991]. The control problem is posed as that of creating multiple control objectives while contacts and dependent degrees of freedom are modeled as constraints in an optimization problem. This problem can be solved using projection-based techniques like Operational Space methods [Khatib, 1986a] or Jacobian-transpose methods [Pratt, 2001]. The main advantage of projection operators is that they don't require time-consuming optimization. The second option is the use of optimal control methods [Stephens 2010, Todorov 2012], which allow for inequality constraints but at the cost of slower computa-

Most recently, colleagues and I co-founded the IEEE Technical Committee on Whole-Body Control, gathering about 100 researchers working on humanoid robotics. The

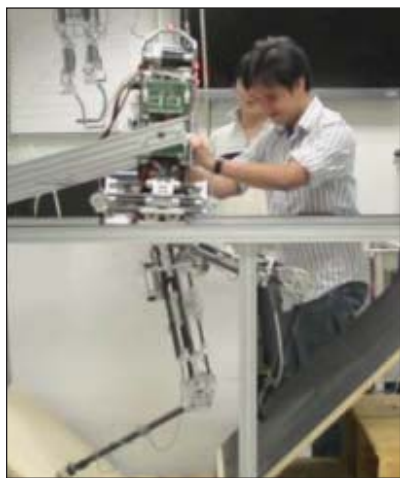


FIGURE 5. Multicontact control of the Hume biped standing on a V-shaped terrain while being disturbed by a student.

algorithm that my group at the University of Texas at Austin has developed is called Whole-Body Operational Space Control (WBOSC) and at its core, it uses floating base inverse dynamics as the robot model. Borrowing from the Operational Space formalism, Whole-Body Operational Space Control solves the floating base inverse dynamics problem with contact constraints and derives the so-called Contact-Consistent Task Jacobians which project operational space forces into actuator torques while complying with the contacts on the robot's body.

In **Figure 4** we show the Whole-Body Operational Space controller implemented in the Hume bipedal robot to perform dynamic locomotion and complex multicontact maneuvers. This type of implementation is the first to use internal force feedback control to balance in cluttered terrains like the one shown in **Figure 5**. This is achieved thanks to the feedback control of the internal forces to overcome the vertical forces exerted by gravity and the person pushing the robot down. Gain scheduling is another important capability of our whole-body controller. As the robot's legs make or break contact, the robot dynamics rapidly change. Although the models used in Whole-Body Operational Space Control attempt to compensate for these changes, the controllers need to be further specialized for each locomotion phase, and this is accomplished by scheduling the gains.

THE DARPA ROBOTICS CHALLENGE

In 2012, we teamed up with NASA Johnson Space Center to build a new humanoid robot to compete in DARPA's Robotics Challenge (DRC). The challenge emerged after the Fukushima Daiichi Nuclear Disaster of 2011 that could have been avoided if unmanned systems could have been deployed to deliver fuel or energy batteries to run the cooling systems.

For the challenge we performed a her-

culean effort to help build an entire humanoid robot from scratch, a whole-body control software to coordinate mobility and manipulation, and a supervisory system to program the robot's behaviors from afar.

ControlIt!

During the DRC we developed software that implemented the Whole-Body Operational Space Control methodology on Valkyrie and dubbed it ControlIt! ControlIt! is multi-threaded to significantly increase achievable servo frequencies using standard PC hardware. It builds upon state-of-the-art software such as Eigen 3.0.5, RBDL 2.3.2, and Robot Operating System (ROS) Hydro and Indigo, and the Gazebo simulator 4.1.0. A parameter binding mechanism enables tight integration between ControlIt! and external processes via an extensible set of transport protocols. A plugin-based architecture enables ControlIt!'s core software to be platform independent and the set of whole body control primitives to be runtime extensible. To support new robots, only two plugins and a URDF model need to be provided — the rest of ControlIt! remains unchanged. New whole body control primitives can be added at runtime by writing a Task or Constraint plugin. ControlIt! comes with plugin libraries containing existing task primitives, robot integration components, and a parameter binding transport layer that provide sufficient functionality for basic applications.

CONCLUSIONS

Whole-Body Operational Space control emerges as a capable framework for realtime unified control of motion and force of humanoid robots. By exploiting the rigid body dynamics of systems, it could theoretically outperform



FIGURE 6 The making of NASA's Valkyrie with the involvement of the HRCL. On the right, Valkyrie competes in the DRC Trial sessions in Miami in December 2013.

high-speed industrial manipulators while providing the grounds for new types of service-oriented applications that require contact. By relying on joint torque sensors, WBOSC opens up the potential to interact with the physical environment using any part of the robot's body while regulating the effective mechanical impedances to safe values. This capability is very important in human-centered applications because the robot could not only detect collisions on any mechanical linkage of its body but also respond to collisions with low impedance behaviors to provide safety.

Until recently no whole-body control software environment with a focus on usability and integration with modern math and communication libraries had been developed. With ControlIt! we provide a strict and easy way to use the WBOSC API consisting of compound tasks which define the operational space, and constraint sets which define the contacts with the environment as well as dependent degrees of freedom. ControlIt! is well integrated with the latest

Ubuntu operating system, the RTAI realtime Kernel, the Robot Operating System, visualization tools, and several libraries for algebraic and rigid body dynamic computations. Additionally, to shave time on computation, ControlIt! relies on a multi-threaded architecture in which the feedback servos, the global models and the task models are computed as separate processes. This implementation allows achieving rates that significantly reduce the tracking error for practical operations. ControlIt! is easy to connect to high level planners. During our participation in DARPA's Robotics Challenge, the behaviors of ControlIt! were programmed using NASA's Robot Task Commander software [Hart, 2013]. More recently, new behaviors have been programmed using Smach from the ROS framework. In the near future, we will support visual servoing to achieve adaptive manipulation of everyday objects in the environment. Also, we will pursue cloud based capabilities and an advanced user interface for programming and calibrating behaviors. ■

REFERENCES

- Bretl, Tim, et al. "Multi-step motion planning for free-climbing robots." *Algorithmic Foundations of Robotics VI*. Springer Berlin Heidelberg, 2005. 59-74.
- Buss, Brian G., et al. "Preliminary walking experiments with underactuated 3d bipedal robot marlo." *Intelligent Robots and Systems (IROS 2014), 2014 IEEE/RSJ International Conference on*. IEEE, 2014.
- Eizmendi, Gorka, Azkoita, Jose Miguel, "Technologies and active strategies for an ageing population", IHE Assistive Technology, 2007
- Fingar, Thomas, Global Trends 2025: A Transformed World, US National Intelligence Council, 2008
- Fok, Chien-Liang., Johnson, Gwen, and Sentis, Luis. "ControlIt!: A Middleware for Whole-Body Operational Space Control." *International Journal of Humanoid Robotics*. Under Review, 2015.
- Haan, J, Kim, B., and Lee, J. "srlib – Seoul National University Robotics Library," June 2009. [Online]. Available: <http://rstation.co.kr/srlib/index.html>
- Hart, Stephen W., et al. "Robot task commander with extensible programming environment." *U.S. Patent Application 13/803,017*.
- Hauser, Kris, et al. "Motion planning for legged robots on varied terrain." *The International Journal of Robotics Research* 27.11-12 (2008): 1325-1349.
- Hirose, Masato. "Development of humanoid robot ASIMO." *Proc. IEEE/RSJ Int. Conference on Intelligent Robots and Systems (Oct. 29, 2001)*. 2001.
- Jain, Abhinandan. "Unified formulation of dynamics for serial rigid multibody systems." *Journal of Guidance, Control, and Dynamics* 14.3 (1991): 531-542.
- Johnson, Matthew, et al. "Team IHMC's Lessons Learned from the DARPA Robotics Challenge Trials." *Journal of Field Robotics* 32.2 (2015): 192-208.
- Kajita, Shuuji, et al. "A realtime pattern generator for biped walking." *Robotics and Automation, 2002. Proceedings. ICRA'02. IEEE International Conference on*. Vol. 1. IEEE, 2002.
- Kato, Ichiro, Tsunoo, Mitsunobu, and Hirabayashi, Hisaaki. "Legs of the WABOT (Waseda Leg-5)— Human Type Hydraulic Walking Machine—." *Waseda Daigaku Rikogaku Kenkyujo Hokoku* 62 (1973): 3.
- Khatib, Oussama, and Burdick, Joel. "Motion and force control of robot manipulators." *Robotics and Automation. Proceedings. 1986 IEEE International Conference on*. Vol. 3. IEEE, 1986a.
- Khatib, Oussama. "Real-time obstacle avoidance for manipulators and mobile robots." *The international journal of robotics research* 5.1 (1986b): 90-98.
- Ott, Christian , Mukherjee, Ranjan, and Nakamura, Yoshihiko. "A Hybrid System Framework for Unified Impedance and Admittance Control." *Journal of Intelligent & Robotic Systems* (2014): 1-17.
- Paine, Nicholas, Oh, Sehoon, and Sentis, Luis. "Design and control considerations for high-performance series elastic actuators." *Mechatronics, IEEE/ASME Transactions on* 19.3 (2014): 1080-1091.
- Pratt, Gill A., and Williamson, Matthew M. "Series elastic actuators.", *Proceedings of the IEEE/RSJ Intelligent Robots and Systems, 1995*
- Pratt, Jerry, et al. "Virtual model control: An intuitive approach for bipedal locomotion." *The International Journal of Robotics Research* 20.2 (2001): 129-143.
- Radford, Nicolaus A., et al. "Valkyrie: NASA's First Bipedal Humanoid Robot." *Journal of Field Robotics* (2015).
- Raibert, Marc H., Brown, H. Benjamin, and Chepponis, Michael. "Experiments in balance with a 3D one-legged hopping machine." *The International Journal of Robotics Research* 3.2 (1984): 75-92.
- Ramezani, Alireza, et al. "Performance analysis and feedback control of ATRIAS, a three-dimensional bipedal robot." *Journal of Dynamic Systems, Measurement, and Control* 136.2 (2014): 021012.
- Righetti, Ludovic, and Schaal, Stefan. "Quadratic programming for inverse dynamics with optimal distribution of contact forces." *Humanoid Robots (Humanoids), 2012 12th IEEE-RAS International Conference on*. IEEE, 2012.
- Sentis, Luis. *Synthesis and control of whole-body behaviors in humanoid systems*. Diss. stanford university, 2007.
- Slovich, M., et al. "Hume: A bipedal robot for human-centered hyper-agility." *Dynamic Walking conference*. 2012.
- Stephens, Benjamin J., and Atkeson, Christopher G.. "Dynamic balance force control for compliant humanoid robots." *Intelligent Robots and Systems (IROS), 2010 IEEE/RSJ International Conference on*. IEEE, 2010.
- Todorov, Emanuel, Erez, Tom, and Tassa, Yuval. "MuJoCo: A physics engine for model-based control." *Intelligent Robots and Systems (IROS), 2012 IEEE/RSJ International Conference on*. IEEE, 2012.
- Vukobratović, Miomir, Borovac, Branislav, and Babković, Kalman. "Contribution to the study of anthropomorphism of humanoid robots." *International Journal of Humanoid Robotics* 2.03 (2005): 361-387.
- Zhao, Ye, Paine, Nicholas, and Sentis, Luis. "Sensitivity Comparison to Loop Latencies Between Damping Versus Stiffness Feedback Control Action in Distributed Controllers." *ASME 2014 Dynamic Systems and Control Conference*. American Society of Mechanical Engineers, 2014a.
- Zhao, Ye, Paine, Nicholas, and Sentis, Luis. "Feedback parameter selection for impedance control of series elastic actuators." *Humanoid Robots (Humanoids), 2014 14th IEEE-RAS International Conference on*. IEEE, 2014b.