

Removal of lead from aqueous solutions and wastewaters using water hyacinth (*Eichhornia crassipes*) roots

Farah Monowara Jahangiri^a, Hasina Tasmin Moutushi^a, Md. Moniruzzaman^b,
Sirajul Hoque^a and Mohammad Enayet Hossain^{a,*}

^a Department of Soil, Water and Environment, University of Dhaka, Dhaka 1000, Bangladesh

^b Bangladesh Council of Scientific and Industrial Research, Dhaka 1205, Bangladesh

*Corresponding author. E-mail: enayetswe@du.ac.bd

Abstract

Dried ground roots of water hyacinth (*Eichhornia crassipes*) were used for removal of Pb(II) from aqueous solution. Batch adsorption experiments were conducted with the dried roots (0.1 g dry weight) using 100 mg/L of Pb(II) aqueous solution adjusted at pH 5.0. Equilibrium was obtained in 90 min with a 92% removal of Pb(II). The effect of contact time, pH, adsorbent dosage, initial metal ion concentration on the adsorption of Pb(II) were also studied. Kinetic studies indicated that the adsorption of Pb(II) followed the pseudo-second-order model with a reaction rate constant (k) of 0.0127 mg/(g.min). Kinetics data conforming to the pseudo-second-order model suggest that chemisorption was the rate-limiting step in the adsorption process. The adsorption data were found to fit best into the Langmuir model ($R^2 = 0.986$). The maximum adsorption capacity was found to be ~50 mg Pb(II) per g of dried roots. To investigate the feasibility of using the water hyacinth roots in a more realistic situation, wastewaters collected from various sources were also tested with the biosorbent. Significant removal of Pb(II) (~88% to ~100%) was observed from the wastewaters at pH 5.0. High adsorption capacity, rapid kinetics, and its low cost make water hyacinth dried roots a good candidate for the removal of Pb(II) from wastewaters.

Key words: adsorption, isotherms, low-cost biosorbent, pseudo-second-order kinetic, wastewater, water hyacinth roots

Highlights

- Lead could be removed from wastewaters using non-living water hyacinth roots as biosorbent.
- 92% removal of lead from aqueous solution was achieved within 90 min.
- Kinetics indicated that the removal process was controlled by chemisorption.
- Langmuir model conformed to the isotherm data, suggesting a monolayer adsorption.
- The biosorbent removed ~88% to ~100% lead from the real wastewaters.

INTRODUCTION

Increasing industrial activities across the globe caused a concomitant increase in the use of heavy metals over the last few decades (Reddy *et al.* 2012). As a result, surface waters all over the world have been heavily contaminated with heavy metals. In Bangladesh, surface waters, especially rivers, have also been contaminated with trace metals due to the indiscriminate disposal of industrial

This is an Open Access article distributed under the terms of the Creative Commons Attribution Licence (CC BY 4.0), which permits copying, adaptation and redistribution, provided the original work is properly cited (<http://creativecommons.org/licenses/by/4.0/>).

effluents. There are over 30,000 factories in and around the capital city of Dhaka (Rampley *et al.* 2020). These factories are continuously discharging pollutants in the form of organics, heavy metals, pathogens, etc. Bhuiyan *et al.* (2015) found that chromium, arsenic, lead, and cadmium contents in water and sediment samples of the Buriganga river exceeded critical limits and the permissible limits set by the Bangladesh government. They attributed the elevated concentrations of these metals to industrial activities and urban sewage systems. Rampley *et al.* (2020) assessed the rivers (Turag, Tongi, Balu, and Buriganga) in and around Dhaka and observed high concentrations of aluminum, cadmium, chromium, iron, zinc, lithium, selenium, and nickel. Heavy metals discharged into aquatic habitats are likely to elevate the level of heavy metal concentrations in microorganisms, flora, and fauna residing in that habitat; these bioaccumulated heavy metals may then come along the food chain (Bhuiyan *et al.* 2015). Consequently, heavy metal pollution in rivers is a significant threat to aquatic systems and humans as well. There have been increasing ecological and public health concerns associated with these metals. The health risks stem from the potential of heavy metals being accumulated and biomagnified, leading to affecting the neurological system, kidney function, and other organs (Whitehead *et al.* 2019). These heavy metals are carcinogenic, mutagenic, and often teratogenic (Khlifi & Hamza-Chaffai 2010). Therefore, it is necessary to treat these metal-contaminated wastewaters before discharge to the environment.

The most applied physical and chemical treatment methods for heavy metal removal are chemical precipitation and subsequent liquid-solid separation by gravity settling; flotation or filtration; sorption (adsorption, ion exchange); membrane processes; electrolytic recovery and liquid-liquid extraction (Aklil *et al.* 2004). However, some of these methods have significant disadvantages: incomplete removal, high energy requirements, production of toxic sludge or waste products that also require disposal and make them economically unviable for the removal of heavy metals at lower concentrations (Aklil *et al.* 2004).

The adsorption process is one of the most popular and attractive options for the removal of heavy metal ions and other contaminants because of its simplicity, convenience, and high removal efficiency (Afkhami *et al.* 2007; Hossain *et al.* 2018). In common sorption processes, activated carbon and synthetic resins are usually used to gain high removal efficiency. However, due to their high production cost, these two sorbents have not gained widespread use and popularity (Zheng *et al.* 2009). Given this, considerable attention has been focused on the development of adsorbents from various types of biomaterials for the removal of metals from water and wastewater in recent times (Lim *et al.* 2008a; Gorme *et al.* 2010; Siboni *et al.* 2011). Using locally available low-cost biosorbents such as aquatic plants, clay materials, coconut shells, sawdust, chitosan, eggshell, agricultural wastes, etc. may be an alternative wastewater treatment technology because they are inexpensive and environmentally friendly (Munagapati *et al.* 2010; Sarkar *et al.* 2017). Low-cost organic biomass contains cellulose, lignin, hemicellulose, extractives, lipids, proteins, simple sugars, starch, etc. which have a variety of functional groups that facilitates complexation and sequestration of heavy metals (Hashem *et al.* 2005, 2007).

Water hyacinth (*Eichhornia crassipes*) (Family: Pontederiaceae) is one such promising aquatic plant owing to its superior tolerance to a contaminated environment, rapid growth (Zhang *et al.* 2014) and high economic value with diverse potential applications (Rezania *et al.* 2015). Water hyacinth grows profusely in the tropical and subtropical regions (Penfound & Earle 1948) as well as in Bangladesh. Due to its superior bioaccumulation abilities compared to most other aquatic macrophytes (Malik 2007), water hyacinth has gained widespread interest in environmental phytoremediation applications (Rezania *et al.* 2015). Water hyacinth was successfully used for the removal of Cd and Zn (Hasan *et al.* 2007). Water hyacinth has also been used as a biosorbent, where dried biomass was used for the removal of heavy metals. Sarkar *et al.* (2017) used dried shoot powder of water hyacinth for the removal of chromium and copper from standard solutions and tannery effluents and the removal efficacy was found to be high. However, bioaccumulation is

a biochemical process ($E_a \sim 63$ kJ/mol) and energy intensive, whereas biosorption is a physicochemical process ($E_a \sim 21$ kJ/mol) and energy-saving (Kadukova & Vircikova 2005). Moreover, compared to living systems, non-living dried biomass presents advantages such as ease of conservation and ease of transport and handling. Keeping all these in mind, we selected water hyacinth to study the heavy metal removal efficiency of its non-living dried roots. We selected lead as a contaminant because it is one of the heavy metals present in elevated concentrations in many rivers in Bangladesh; for example, the Buriganga (Bhuiyan *et al.* 2015), the Korotoa (Islam *et al.* 2015b), the Paira (Islam *et al.* 2015a), and the Bangshi (Rahman *et al.* 2014). Therefore, the present research was aimed at investigating the adsorption potential of dried water hyacinth roots for the removal of lead (Pb(II)) from its aqueous solution under various experimental conditions.

MATERIALS AND METHODS

Materials

Lead nitrate (PbNO_3), cadmium chloride ($\text{CdCl}_2 \cdot 2.5\text{H}_2\text{O}$), 80% acetic acid (CH_3COOH), nitric acid (HNO_3), sodium hydroxide (NaOH), hydrochloric acid (HCl), 72% sulfuric acid (H_2SO_4) used in this study were of American Chemical Society (ACS) grade. The standard solutions were prepared by dissolving the required amount of salts in ultrapure water. All glassware was dipped in 10% HNO_3 and washed with ultrapure water at least three times before use.

Preparation of adsorbent

Freshwater hyacinth plants were collected from a relatively less polluted area of the Monairkandi branch of river Meghna, Bangladesh. Water samples were also collected from the same spot. The collected plants and water samples were brought to the laboratory. The roots were immediately separated from the plant and washed with copious amounts of tap water. The roots were then washed five times with ultrapure water. The cleaned roots were cut into 1–2 mm segments and then dried at 70 °C until constant weight. After drying, the roots were ground and sieved through a 0.25 mm sieve. The prepared adsorbent was stored in a reagent bottle for future use.

Characterization of dried water hyacinth roots (DWHR)

The prepared adsorbent was analyzed for organic matter, mineral matter, cellulose, and lignin content. The adsorbent was also analyzed for lead (Pb), cadmium (Cd), chromium (Cr), and nickel (Ni) contents following standard methods. Lead, Cd, Cr, and Ni contents of the water samples collected from the site of water hyacinth sample collection were also determined. Fourier Transform Infrared (FT-IR) spectroscopy was used to observe and characterize the functional groups present in the roots. Fresh dried roots and spent (after Pb(II) sorption) roots were dried overnight in a vacuum drying oven (Labtech) and analyzed with Attenuated Total Reflectance (ATR) method with a Perkin Elmer FT-IR/NIR Spectrometer Frontier model.

Metal solutions

A standard 1,000 mg/L stock solution of Pb(II) was prepared. The synthetic solutions required in the sorption experiments were prepared from the standard solution through dilution. Deionized water was used in all cases.

Batch sorption experiments

In order to study the effect of contact time, pH, sorbent dosage, and metal concentration on Pb(II) sorption by DWHR, adsorption experiments were carried out at room temperature (25 ± 2 °C) using a rotatory shaker at 150 rpm. After agitation, the synthetic solutions were filtered through a Whatman filter paper No. 40 (8 μ m particle retention). The filtration was done to separate the dried root biomass from the synthetic solution. The dried roots were activated in deionized water for 2 h before every sorption experiments. Three replicates of the control and treatment were run during the sorption experiment with aqueous Pb(II) solutions.

Effect of contact time

The effect of contact time was studied conducting batch experiments with an initial Pb(II) concentration of 100 mg/L, pH 5.0 ± 0.05 , 0.1 g sorbent dosage, and at different times (5, 10, 15, 20, 30, 60, 90, 120, and 240 min). The pH was kept at 5.0 based on some previous studies.

Effect of sorbent dosage

Batch experiments were carried out with different dosages of DWHR (0.025, 0.05, 0.1, 0.2, and 0.25 g/50 mL) to determine the optimum dosage for metal removal. In this experiment, the initial metal concentration was kept constant at 100 mg/L, the pH was kept at 5.0 ± 0.05 , and the equilibrium time was kept at 90 min. The equilibrium time was set based on the contact time study.

Effect of pH

Pb(II) uptake onto DWHR as a function of pH was studied varying the metal solution pH from 1.5 to 6.0. The pH was adjusted using diluted NaOH and HCl. The synthetic solutions of 100 mg/L Pb(II) were agitated with 0.1 g/50 mL of sorbent dosage for 90 min of equilibrium time.

Effect of metal concentration and isotherm study

To understand the isotherm behavior of DWHR during Pb(II) removal, experiments were conducted at pH 5.0 ± 0.05 with 0.1 g/50 mL sorbent dosage, 90 min of equilibrium time, and varying metal concentrations of Pb(II) (50–300 mg/L).

Removal study with real wastewaters

In order to study the efficacy of DWHR in removing Pb (II) from wastewaters, wastewaters were collected from various sources. A variety of industries were selected for the removal studies, including battery, dyeing, and ship-breaking industries. All of them were known to contain a high amount of Pb(II) in their wastewaters. The lead-acid battery industry was located in Kamrangirchar, the automobile battery industry in Mirzapur, the dyeing industries in Tejgaon and Sreepur, and the ship-breaking industry in Jahanabad. Removal studies were first carried out with DWHR and the raw wastewaters. The concentration of Pb(II) was determined before and after the removal studies. The pH of the wastewaters was then adjusted at 5.0 and the removal studies were done again. The Pb(II) concentrations were again determined in the pH-adjusted wastewaters. The two sets of data were then analyzed. All the studies were done in triplicate.

Calculation of results

The results obtained from the sorption experiments were at first evaluated by Dixon's Test (at 5% level) to identify and reject if there were any outliers. The results of the concentration of three replicates of the control and the residual concentration of metals in the three replicates of the treated solution or wastewaters were then averaged and the mean results were then used to determine the percentage of metal removal and the amount of metal ions adsorbed on the adsorbent by the following formula:

$$\text{Removal (\%)} = \frac{C_0 - C_f}{C_0} \times 100$$

where, C_0 is the initial metal concentration and C_f is the residual metal concentration after treatment, and

$$q_{eq} = \frac{(C_0 - C_f)V}{m}$$

where, q_{eq} is the amount of metal ions (unit mass, mg) adsorbed per gram of dried roots, V is the volume of metal solution in liters and m is the dry mass of water hyacinth roots in grams.

Statistical analysis

All the calculations were performed using Microsoft Excel (version 2020). One-way analysis of variance (ANOVA) followed by Tukey's Post-hoc test was carried out by Minitab statistical software (version 19). The data were checked for normality and homoscedasticity before the parametric test (one-way ANOVA). Statistical significance was determined based on whether p values were <0.05 or not.

RESULTS AND DISCUSSION

The ash or mineral matter content of the water hyacinth root biomass was found to be 19.0%, which was almost identical (18.43%) to the findings of [Mukaratirwa-Muchanyereyi et al. \(2016\)](#). A number of other researchers also reported a more or less similar amount of mineral matter in water hyacinth roots; for example, 17% ([Kouraim et al. 2014](#)), 20.2%, and 16.29% ([Poddar et al. 1991](#)). The organic matter of the roots was found to be 81.0%, which was similar to the finding (81.57%) of [Mukaratirwa-Muchanyereyi et al. \(2016\)](#). The lignin and cellulose contents of the root biomass were 22.44% and 15.59%, respectively. [Kouraim et al. \(2014\)](#) found the lignin and cellulose contents of water hyacinth to be 15 and 28%, respectively. [Ahn et al. \(2012\)](#) reported the lignin content of water hyacinth roots varying from 3 to 28%. In a study with land plants, [Bhattacharya & Kumar \(2010\)](#) obtained cellulose content between 30 and 50%, and lignin content between 15 and 30%. Total nitrogen (N) content in the root biomass was found to be 0.86%, which is lower than the content found by [Kouraim et al. \(2014\)](#) and [Nghah & Hanafiah \(2008\)](#); their analyzed N contents were 2.0% and 1.2%, respectively. Therefore, the background concentrations obtained for water hyacinth in this study are in agreement with the previous findings of other researchers.

Generally, heavy metal contents in aquatic plants are higher than in the water bodies where the plants are growing ([Abdel-Sabour et al. 1996](#)). In the present study, Pb and Ni contents were below the detection limits (BDL) of the instrument (Table S1, Supplementary Material). However, Pb and Ni concentrations were 2.60 mg/kg and 3.90 mg/kg in the dried water hyacinth roots, respectively. [Abdel-Sabour et al. \(1996\)](#) worked with water hyacinth and reported that although the heavy metal content in the water of river Nile was below 0.012 mg/L, the roots of water hyacinth grown in that

water contained 25.1 mg/kg Pb, 1.0 mg/kg Cd, 3.2 mg/kg Cr, and 2.4 mg/kg Ni. In a recent work by Shafy *et al.* (2016), the Pb content of the roots of water hyacinth grown in the Nile river was found to vary from 54.8 mg/kg to 123.3 mg/kg across the year.

Characterization of water hyacinth roots

The FT-IR spectrum of DWHR revealed the presence of many functional groups, indicating the complex nature of the molecular structure of roots of water hyacinth. Figure 1 shows the peaks observed in the FT-IR spectra of freshwater hyacinth root biomass. The band at $3,340\text{ cm}^{-1}$ is attributed to O-H stretch vibration (Parikh 1974; Sundari & Ramesh 2012). The band at $2,924.17\text{ cm}^{-1}$ is attributed to C-H stretch vibration for alkanes (Liu *et al.* 2006). The band at $2,297.45\text{ cm}^{-1}$ was probably due to non-conjugated C=N stretching vibration (Parikh 1974). The peak at $1,628.41\text{ cm}^{-1}$ is assigned to the C=O stretch vibration of carboxylate (Liu *et al.* 2006; Southichak *et al.* 2006). Sundari & Ramesh (2012) reported a similar peak on water hyacinth nanofibers. The bands at $1,419\text{ cm}^{-1}$ and $1,321.6\text{ cm}^{-1}$ are attributed to C-H bending vibrations or C-H deformation (Pandey & Pitman 2003; Osman *et al.* 2010). The strongest peak in DWHR was observed at $1,004.62\text{ cm}^{-1}$, which is assigned to C-O stretches. The presence of C-O stretch indicates the presence of alcoholic hydroxyl groups (Lim *et al.* 2008b), especially that of primary alcohols. This hydroxyl group of primary alcohols can be found in coumaryl alcohols, which is one of the building units of lignin (Tan 2010). Thus, the strongest peak at $1,004.62\text{ cm}^{-1}$ confirms the lignin structure of water hyacinth roots (Neto *et al.* 1995). Besides, the peaks at 797.05 and 687.94 cm^{-1} are attributed to -CH=CH- (cis) bonds (Smith 2016). Thus, the most intense bands in the FT-IR of freshwater hyacinth root biomass are $1,004.62$, $1,628.41$ and $3,340\text{ cm}^{-1}$, attributed to C-O stretches typical of lignin, C=O stretch vibration of carboxylate and O-H stretches typical of cellulose, respectively (Cordeiro *et al.* 2011).

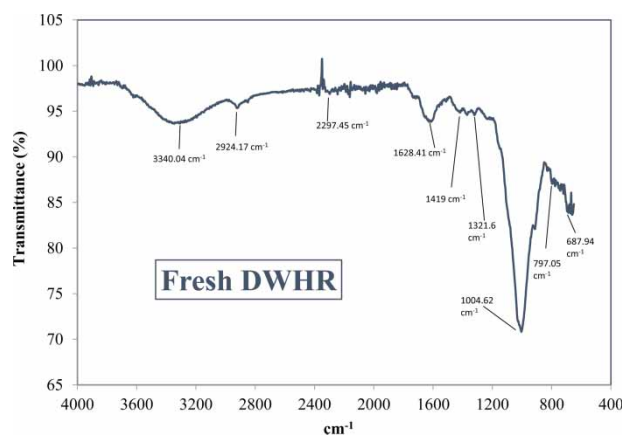


Figure 1 | FT-IR graph for fresh dried water hyacinth roots (DWHR).

The FT-IR study demonstrates the fact that the water hyacinth root biomass is mainly lignocellulosic in composition. The FT-IR spectrum also shows that pure water hyacinth root biomass contained a greater percentage of lignin than cellulose, which can be substantiated by the results of cellulose and lignin content analysis.

Sorption experiment

Effect of contact time

Batch studies were conducted to see the effect of contact time on the sorption of Pb(II) onto the roots of water hyacinth. It was revealed that the sorption was rapid for the first 60 min and equilibrium was

reached within 90 min (Figure 2). This was probably due to most of the cations being removed by the sorbent within the first 60 min of contact time. After very rapid adsorption, the rate of sorption slowed down. The driving force for sorption; that is, the concentration difference between the bulk solution and the solid-liquid interface, was initially higher, which resulted in a faster sorption rate initially. After the initial period, a decrease in the sorption rate was probably owing to the slower diffusion of solute into the interior of the sorbent (Zhu *et al.* 2008).

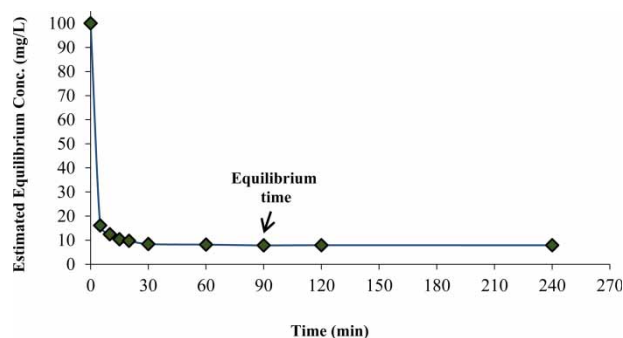


Figure 2 | Effect of contact time on Pb(II) removal by DWHR at 25 ± 2 °C (initial concentration = 100 mg/L, pH = 5.0, and sorbent dosage = 0.1 g).

Effect of pH

The effect of pH on metal sorption was studied by many researchers, and their findings indicated that the pH values of the solution could significantly influence biosorption (Bayramoğlu & Arica 2009; Ozdemir *et al.* 2009). The pH level affects the network of negative charges on the surface of the biosorbent, as well as the physico-chemistry and hydrolysis of the metal (Reddy *et al.* 2012). Therefore, in the present study, batch studies were performed at varying pH values (1.5, 3.0, 4.5, 5.0, 5.5, and 6.0) to find the optimum pH for maximum Pb(II) removal. At pH 6.0, there was a tinge of cloudiness in the solution indicating the onset of precipitation. Therefore, the pH study was performed within that scale.

The removal of Pb was observed to increase with increasing pH (from 1.5 to 5.0) (Figure 3). It was also seen that at highly acidic conditions (pH 1.5), the amount of metal removal was small (10.60% removal). This was due to the presence of a higher concentration of H^+ ions in the solution, which

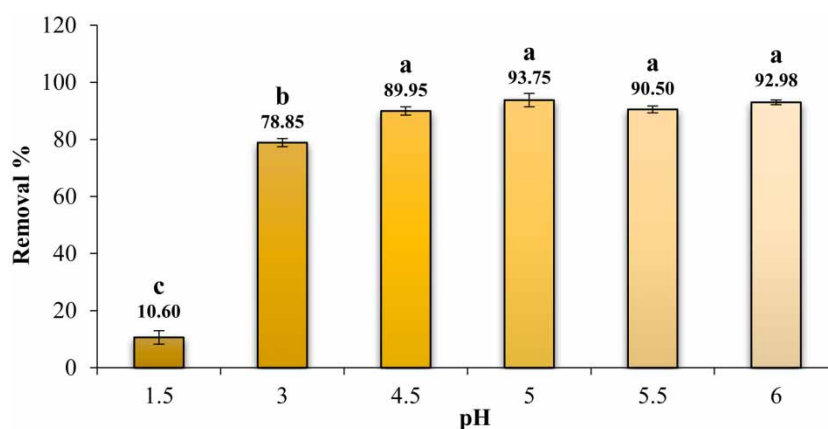


Figure 3 | Effect of pH on Pb(II) removal by DWHR at 25 ± 2 °C. Initial concentration = 100 mg/L, sorbent dosage = 0.1 g, and equilibrium time = 90 min. Differences were determined by a one-way ANOVA followed by Tukey's pairwise comparison ($p < 0.05$). Different letters above the bars indicate significant differences between different pH values.

competed with metal ions for the adsorption sites of the biosorbent (Shin *et al.* 2007). A sharp increase in metal ion binding was observed from pH 3.0 to 5.0. The highest removal (93.75%) was seen at pH 5.0. A decreased biosorption was observed at pH 5.5 and then the biosorption slightly increased at pH 6.0. It was already mentioned that at pH 6.0 there was a shade of cloudiness in the solution. Precipitation might have occurred at pH 6.0 that resulted in higher biosorption at pH 6.0 compared to pH 5.5. Thus, it can be suggested that relatively lower adsorption at lower pH values and above the optimum value (pH 5.0) was due to heavy protonation of the negatively charged binding sites and formation of metal hydroxides, respectively (Yan & Viraraghavan 2003).

Effect of sorbent dosage

The results showed that with an increase of DWHR dosage from 0.025 to 0.1 g, the Pb(II) removal increased from 37% to almost 93% (Figure 4). Even though 100% removal was achieved by 0.25 g dosage of roots, 0.1 g dosage was considered as the optimum dose given the fact that lower dosage will cost less capital and resource. Several researchers reported similar results, stating that the increase in sorbent amount causes a subsequent increase in adsorption sites that results in the increase in adsorption capacity (Parvathi *et al.* 2007; Saraswat & Rai 2010). Thus, the increment in the adsorption efficiency occurs until saturation with an increase in sorbent dosage.

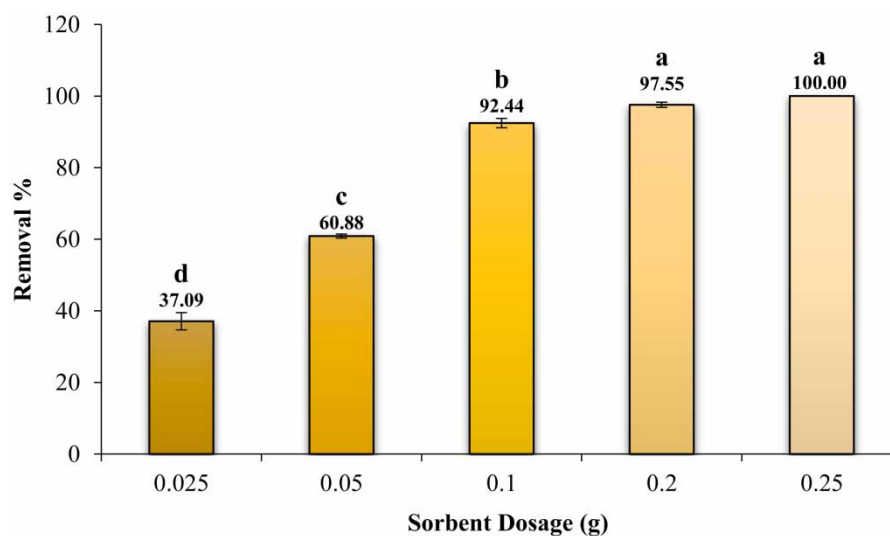


Figure 4 | Effect of sorbent dosage on Pb(II) removal by DWHR at 25 ± 2 °C. Initial concentration = 100 mg/L, pH = 5.0, and equilibrium time = 90 min. Differences were determined by one-way ANOVA followed by Tukey's pairwise comparison ($p < 0.05$). Different letters above the bar indicate the significance of differences between different adsorbent dosages.

Effect of metal concentration

It was observed that at the lowest concentration, the removal was the highest and the removal percentage gradually decreased with the increase in metal concentration (Figure 5). At 50 mg/L of initial concentration of Pb(II), the removal percentage was ~98%. On the other hand, the lowest percentage was observed at 300 mg/L (44%). Erdem *et al.* (2004) and Xiaofu *et al.* (2008) also reported that the adsorption efficiency of sorbents decreased with increasing initial metal concentration. El-Ashtoukhy *et al.* (2008) explained that at low concentrations, metals are adsorbed by specific sites. With increasing metal concentrations, the specific sites are saturated followed by the occupation of the exchange sites, which results in less adsorption efficiency.

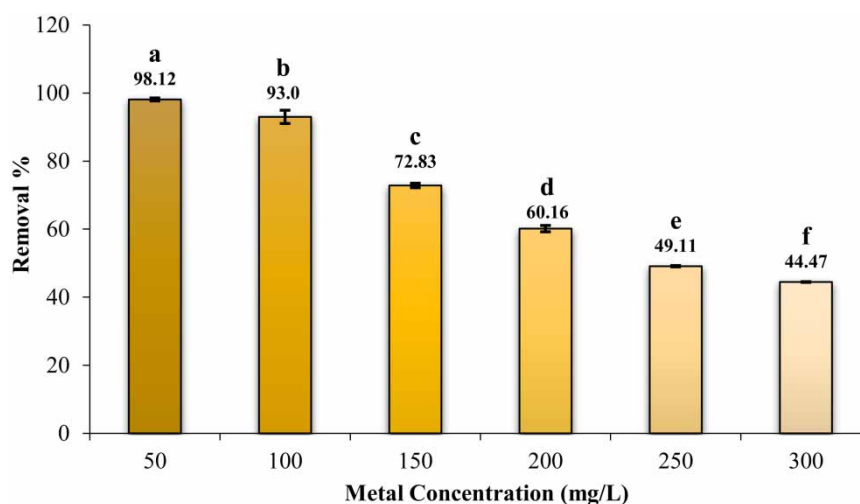


Figure 5 | Effect of metal concentration on Pb(II) removal by adsorption onto DWHR at 25 ± 2 °C. pH = 5.0, Sorbent dosage = 0.1 g, and equilibrium time = 90 min. Differences were determined by one-way ANOVA followed by Tukey's pairwise comparison ($p < 0.05$). Different letters above the bar indicate the significance of differences between different metal concentrations.

Adsorption kinetics

In order to evaluate the kinetic rate, the rate-controlling steps, and the adsorption mechanism of Pb(II) ions onto DWHR, the contact time (kinetic study) data were interpreted by the pseudo-first and pseudo-second-order models. The models were fit with the optimized values derived from the sorption study. The optimum conditions taken for the models are as follows: initial concentration = 100 mg/L, pH = 5.0, sorbent dosage = 0.1 g, and equilibrium time = 90 min. A conformation between experimental and calculated models are expressed in terms of the coefficient of variation (R^2 values are shown in Table 1). The relatively higher R^2 values are regarded to be the more applicable model to the adsorption of Pb(II).

Table 1 | Parameters constants of pseudo-first-order and pseudo-second-order kinetic models for Pb(II) sorption by DWHR, at 25 ± 2 °C (initial concentration = 100 mg/L, pH = 5.0, sorbent dosage = 0.1 g, and equilibrium time = 90 min)

Metal ion	Experimental $q_{e,exp}$ (mg/g)	Pseudo-first-order model			Pseudo-second-order model		
		$q_{e,cal}$ (mg/g)	k_1 (min^{-1})	R^2	$q_{e,cal}$ (mg/g)	k_2 g/(mg.min)	R^2
Pb(II)	39.74	5.71	0.0304	0.8475	40.82	0.0127	0.9999

Pseudo-first-order kinetic model

The pseudo-first-order kinetic model was proposed by Lagergren (1898), which was the earliest model describing the adsorption rate related to adsorption capacity. The integral form of the model was generally expressed as follows:

$$\log(q_e - q_t) = \log q_e - \frac{k_1}{2.303} t$$

where, q_e (mg/g) is the amount adsorbed at equilibrium time, q_t (mg/g) is the amount adsorbed at time (t) and k_1 (min^{-1}) is the adsorption rate constant.

If the pseudo-first-order kinetics is applicable, a linear relationship is obtained. The rate of variation is proportional to the first power of concentration if it is of strict surface adsorption. The relation between the initial solute concentration and adsorption rate will not be linear when pore diffusion limits the adsorption process. In the kinetic study, the first-order equation of Lagergren did not apply well during the entire contact time and was only applicable to the initial 60 min of the adsorption process. The plotting of $\log(q_e - q_t)$ versus **time** deviated considerably from the theoretical data after a short period (<20 min). The slope and intercept of the curve were used to determine the first-order constant k_1 , capacity q_e , and the corresponding linear regression correlation coefficient, R^2 value (Table 1, Figure S1, Supplementary Material).

The pseudo-first-order model failed to provide a realistic estimate of q_e (mg/g) of adsorbed Pb(II) as the experimental value of q_e (39.7 mg/g) was far higher than the fitted value (5.71 mg/g) as shown in Table 1. This underestimation of the amount of binding sites is probably because q_e was determined from the y-intercept ($t = 0$). The intercept is strongly affected by the short-term Pb(II) uptake, which is usually lower than the equilibrium uptake. This is a disadvantage of using the linearized first-order model. Therefore, the adsorption of analyte ions onto DWHR was not considered as being a first-order reaction even though the correlation coefficient R^2 is relatively high (0.8475).

Pseudo-second-order kinetic model

The pseudo-second-order model was developed based on the assumption that the rate-limiting step may be chemisorption promoted by either valence forces, through the exchange of electrons between the parties involved, or covalent forces, through the sharing of electrons between the biosorbent and sorbate (Ho & McKay 1999). The sorption rate is proportional to the square of the number of unoccupied sites. Vadivelan & Kumar (2005) reported that most of the adsorption system followed a pseudo-second-order kinetic model which can be linearly be expressed as,

$$\frac{t}{q_t} = \frac{1}{k_2 q_e^2} + \frac{1}{q_e} t$$

where, k_2 (g/(mg.min)) is the rate constant of adsorption. A plot of t/q_t versus t should give a linear relationship for the applicability of the second-order kinetic. The rate constant (k_2) and adsorption at equilibrium (q_e) can be obtained from the intercept and slope, respectively. The initial adsorption rate, h_0 (mg/(g.min)) is defined by,

$$h_0 = k_2 q_e^2$$

The parameter constants (Table 1, Figure S1) derived from the pseudo-second-order kinetic model indicate that the data fitted more into the pseudo-second-order model. The pseudo-second-order model provided a very close estimate of q_e (mg/g) of adsorbed Pb(II). Therefore, chemisorption most probably played the predominant role for the Pb(II) removal capacity of the dried water hyacinth roots.

Isotherm studies

Langmuir and Freundlich adsorption isotherms were tested for the adsorption data obtained by conducting an isotherm study with DWHR (0.1 g dry weight) with varying concentrations of Pb(II) solutions (50–300 mg/L).

The Langmuir model assumes that there is no interaction between the adsorbate molecules and the adsorption is localized in a monolayer (Langmuir 1918).

$$q_e = \frac{q_m b C_e}{1 + b C_e}$$

where C_e (mg/L) is the equilibrium concentration of the remaining ions in the solution; q_e (mg/g) is the amount of ions adsorbed per mass unit of adsorbent at equilibrium; q_m (mg/g) is the amount of ions at complete monolayer which is also called the sorption maximum, and b (L/mg) is the Langmuir constant related to the affinity of binding sites which is a measure of the energy of adsorption. The Langmuir equation can be described by the linearized form:

$$\frac{1}{q_e} = \frac{1}{q_m b} \times \frac{1}{C_e} + \frac{1}{q_m}$$

The Langmuir constants b and q_m are calculated from the slope ($1/q_m b$) and intercept ($1/q_m$) of the plots of $1/q_e$ (Y-axis) and $1/C_e$ (X-axis). The separation factor, R_L , is used to predict the affinity between adsorbate and adsorbent. R_L can be derived from the following equation.

$$R_L = \frac{1}{1 + b C_0}$$

The R_L value indicates the shape of the isotherm. R_L values between 0 and 1 indicate favorable adsorption (McKay *et al.* 1982). R_L value being equal to 0, 1 and >1 indicates irreversible, linear, and unfavorable adsorption, respectively.

The Freundlich isotherm model is an empirical relationship describing the adsorption of solutes from a liquid to a solid surface, and the model assumes that in the adsorption process different sites with different adsorption energies are involved (Freundlich 1906). The Freundlich isotherm can be applied for non-ideal sorption on heterogeneous surfaces and multilayer sorption. It also assumes that the adsorbent has a different affinity for adsorption. The Freundlich equation is expressed as:

$$q_e = K_F C_e^{1/n}$$

where K_F and n are Freundlich constants indicating adsorption capacity and intensity or the favorability of the sorption process, respectively. When the $1/n$ values are small, it implies that the adsorption occurs in a fairly wide concentration range. Adsorption is favorable for values $0.1 < 1/n < 1.0$ (Kadirvelu & Namasivayam 2000). Values of $1/n$ being less than unity are an indication that significant adsorption takes place at low concentrations but the increase in the amount adsorbed becomes less significant at higher concentrations (Baquero *et al.* 2003; Moreno-Piraján & Giraldo 2010). To determine the constants K_F and n , the Freundlich equation can be described by the linearized form:

$$\log q_e = \log K_F + \frac{1}{n} \log C_e$$

Values of K_F and n are calculated from the intercept and slope of the linear plots of $\log q_e$ vs. $\log C_e$.

Adsorption data fitted better into the Langmuir ($R^2 = 0.986$) than the Freundlich ($R^2 = 0.908$) isotherm (Table 2, Figure S2). The fact that the Langmuir isotherm most closely represented the experimental data could be interpreted as an indication of homogenous adsorption, leading to a monolayer binding. From the Langmuir isotherm model, the maximum sorption capacity was found to be 49.75 mg Pb/g (dry weight). The R_L values for Pb(II) ranged from 0.0038 to 0.02 (for 50–300 mg/L), indicating favorable adsorption process (Table 2). The magnitude of K_F and n from


Table 2 | Isotherm parameter constants for Pb(II) sorption onto roots of water hyacinth

Metal Ion	Langmuir isotherm				Freundlich isotherm		
	R ²	q _m (mg/g)	b (L/mg)	R _L	R ²	K _F (mg/g).(L/mg) ^{1/n}	n
Pb(II)	0.987	49.75	0.8627	0.0038–0.02	0.909	23.52	5.63

the Freundlich isotherm shows that it is possible for easy separation of heavy metal ions from aqueous solution and high adsorption capacity. Also, the higher the K_F value is, the greater the adsorption intensity.

FT-IR characterization of spent DWHR

FT-IR characterization of the functional groups was done on spent or used DWHR to confirm the adsorption mechanism and to determine the functional groups involved in the binding of Pb(II) ions onto the biosorbent. The infrared spectra of the biosorbent laden with Pb(II) (Figure 6) contained band of O-H stretch vibration, but the peaks shifted to a higher wave number at 3,361.04 cm⁻¹ and 3,346.40 cm⁻¹ respectively. The band at 2,924.17 cm⁻¹, C-H vibration, is also present in the spent biosorbent, but with a slight shift to a lower wave number to 2,919 cm⁻¹. The band at 2,297.45 cm⁻¹, attributed to non-conjugated C = N stretching vibration, was present only in the fresh DWHR but was absent in spent DWHR. The band at 1,628.41 cm⁻¹, assigned to C = O stretch vibration of carboxylate, was also present in spent DWHR but with a shift in lower wave number to 1,618.41 cm⁻¹. In the case of the band at 1,321.6 cm⁻¹, assigned to C-H bending, the peak shifted downwards to lower energy at 1,379 cm⁻¹ in spent DWHR. A new band at 1,237.45 cm⁻¹ was observed in Pb(II) laden DWHR, which can be assigned to carboxylate (Reddy *et al.* 2010). The strongest peak observed at the 1,004.62 cm⁻¹, attributed to the C-O stretch bond, was found to shift downward to lower energy at 1,027.69 cm⁻¹ indicating the involvement of the C-O functional group in the metal binding. When the FT-IR spectra were compared between fresh and spent DWHR (Figures 1 and 6), it can be seen that the Pb sorption occurred more at C-O and O-H functional groups, which are among the most intense bands present in the fresh DWHR. The shifts in the bands indicate that there were binding

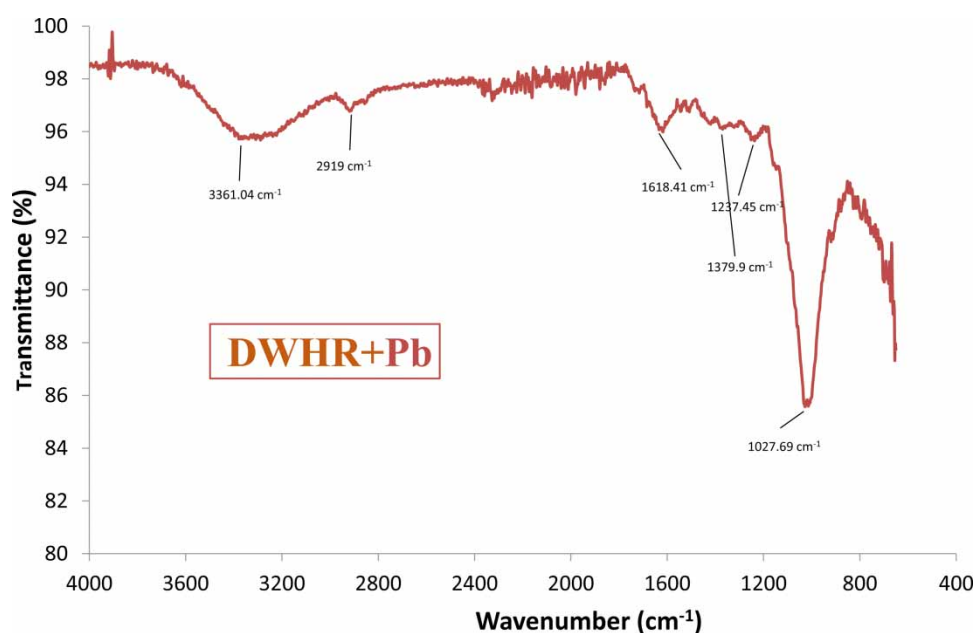**Figure 6** | FT-IR spectrum of spent DWHR laden with Pb.

processes taking place on the surface of the biosorbent, and the greater the shift, the stronger the bond between the biosorbent and the adsorbed metal (Karnib *et al.* 2014).

Removal study with real wastewaters

Removal study with real wastewaters was carried out with or without pH adjustment (Figure 7 and Table S2). The pH adjustment was done to simulate the batch experiment where the highest amount of Pb(II) was removed. The results of the removal of Pb(II) by DWHR from both raw and pH adjusted wastewaters (WW) are presented in Figure 7. The biosorbent worked efficiently in four of the wastewaters, removing 75–97% Pb(II). However, the DWHR biosorbent failed to remove a significant amount of Pb from the wastewaters of the automobile battery industry. When pH was adjusted to 5.0, the removal of Pb drastically increased from ~21% to ~93% in the automobile battery industry's wastewater. This increase in removal was in line with the removal of Pb found in the sorption experiment with aqueous solutions at the same pH. Other industrial wastewaters also showed an increase in Pb removal due to pH adjustment.

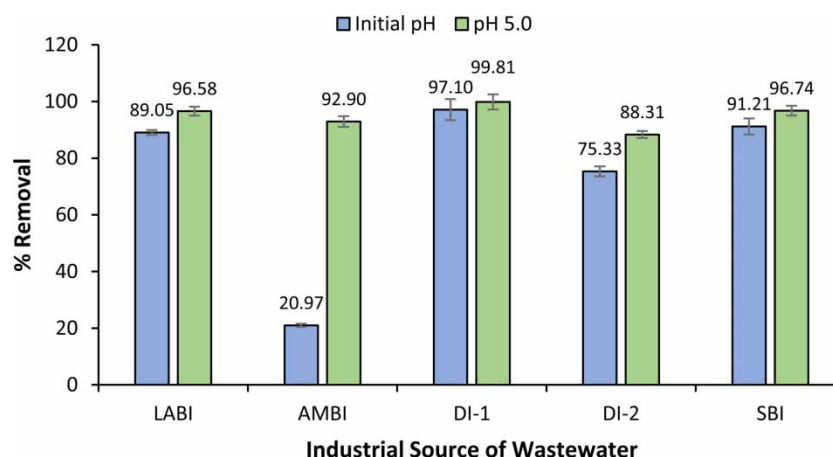


Figure 7 | Removal of Pb(II) by DWHR from industrial wastewaters at initial pH and at pH 5.0. Removal conditions: wastewater volume = 50 mL, sorbent dosage = 0.1 g, and equilibrium time = 90 min. LABI = Lead-acid battery industry (initial pH, 3.38), AMBI = Automobile battery industry (initial pH, 1.53) DI-1 = Dyeing industry-1 (initial pH, 6.66), DI-2 = Dyeing industry-2 (initial pH, 7.63), and SBI = Ship-breaking industry (initial pH, 6.43).

Possible implementation of the technology

Water hyacinth is a nuisance in tropical and subtropical countries, including Bangladesh. It suffocates aquatic life by preventing the diffusion of oxygen. It blocks waterways and thereby obstructs navigation. It affects tourism by reducing the aesthetic values of water bodies. To deal with water hyacinth, herbicides have previously been employed. However, using herbicides creates additional environmental problems. Moreover, the ultimate disposal of expired water hyacinth is a substantial problem, which renders countries incurring a huge loss. Therefore, the use of water hyacinth for the treatment of wastewater is an attractive option. In the present study, the maximum adsorption capacity was found to be 49.75 mg of Pb per gram of dried water hyacinth root biomass. In the wastewater, the adsorption capacity may be reduced by the interference from other heavy metals. Assuming that the Pb sorption will be reduced by half, the amount of root biomass required can be calculated for a wastewater having a concentration of 10 mg Pb/L. Using the figure of 25 mg of Pb per gram of dried root biomass and the Pb concentration of 10 mg/L, 400 g of dried water hyacinth root biomass would be required to remove 10 g of Pb from 1,000 L of water. Therefore, if a wastewater treatment plant

generates 10,000 L of Pb-laden wastewater per day, 4,000 g or 4 kg of dried water hyacinth biomass would be needed per day. However, a detailed cost-benefit analysis needs to be done to see the feasibility of using dried water hyacinth root in a wastewater treatment plant. Even though the water hyacinth biomass is not expensive, the costs involving water hyacinth transportation, handling and regeneration will need to be determined before the biosorbent could be employed in a real wastewater treatment plant.

CONCLUSIONS

The aim of the present study was to find a cheaper and locally available alternative to expensive sorbents for the removal of heavy metals (e.g. Pb) from wastewaters. In Bangladesh, there is a general reluctance on the part of the industrialists to operate effluent treatment plants that require expensive chemicals. To address that problem, a cheaper alternative was sought in this study. Non-living dried water hyacinth root was tested for its efficacy as a biosorbent and it was found to be an effective biosorbent for removal of Pb(II) from aqueous solution. The removal kinetics was found to be fast which enhances its applicability as a biosorbent. The Freundlich isotherm indicates that chemical sorption was responsible for Pb(II) removal by water hyacinth roots. The biosorbent also exhibited very promising Pb(II) removal in pH-adjusted wastewaters. A scale-up calculation was also done to determine the quantity of biosorbent required for Pb(II) removal from wastewater. The findings of this research have considerable implications for the possible future application of this biosorbent in wastewater treatment plants.

ACKNOWLEDGEMENTS

Gratitude is due to Soil and Environment Research Division, Bangladesh Council of Scientific and Industrial Research (BCSIR) Laboratories, Dhaka; NST Fellowship and Research Grant 2016-17 by the Ministry of Science and Technology, Government of Bangladesh; and Department of Soil, Water and Environment, University of Dhaka, for funding and supporting this research.

DATA AVAILABILITY STATEMENT

All relevant data are included in the paper or its Supplementary Information.

REFERENCES

- Abdel-Sabour, M., Abdel-Haleem, A. & Zohny, E. 1996 *Chemical Composition of Water Hyacinth (Eichhronia Crassipes) A Comparison Indication of Heavy Metal Pollution in Egyptian Water Bodies*. Vol. 4.
- Afkhami, A., Madrakian, T., Karimi, Z. & Amini, A. 2007 [Effect of treatment of carbon cloth with sodium hydroxide solution on its adsorption capacity for the adsorption of some cations](#). *Colloids and Surfaces A: Physicochemical and Engineering Aspects* **304**(1–3), 36–40.
- Ahn, D. J., Kim, S. K. & Yun, H. S. 2012 [Optimization of pretreatment and saccharification for the production of bioethanol from water hyacinth by *Saccharomyces cerevisiae*](#). *Bioprocess and Biosystems Engineering* **35**(1–2), 35–41.
- Aklil, A., Mouflih, M. & Sebti, S. 2004 [Removal of heavy metal ions from water by using calcined phosphate as a new adsorbent](#). *Journal of Hazardous Materials* **112**(3), 183–190.
- Baquero, M., Giraldo, L., Moreno, J., Suarez-Garcia, F., Martinez-Alonso, A. & Tascon, J. J. 2003 [Activated carbons by pyrolysis of coffee bean husks in presence of phosphoric acid](#). *Journal of Analytical and Applied Pyrolysis* **70**(2), 779–784.
- Bayramoğlu, G. & Arica, M. Y. 2009 [Construction a hybrid biosorbent using *Scenedesmus quadricauda* and Ca-alginate for biosorption of Cu \(II\), Zn \(II\) and Ni \(II\): kinetics and equilibrium studies](#). *Bioresource Technology* **100**(1), 186–193.

- Bhattacharya, A. & Kumar, P. 2010 Water hyacinth as a potential biofuel crop. *Electronic Journal of Environmental, Agricultural and Food Chemistry* **9**(1), 112–122.
- Bhuiyan, M. A. H., Dampare, S. B. & Suzuki, M. 2015 Source apportionment and pollution evaluation of heavy metals in water and sediments of Buriganga River, Bangladesh, using multivariate analysis and pollution evaluation indices. *Environmental Monitoring and Assessment* **187**(1), 4075.
- Cordeiro, N., Gouveia, C. & John, M. J. 2011 Investigation of surface properties of physico-chemically modified natural fibres using inverse gas chromatography. *Industrial Crops and Products* **33**(1), 108–115.
- El-Ashtoukhy, E.-S., Amin, N. K. & Abdelwahab, O. 2008 Removal of lead (II) and copper (II) from aqueous solution using pomegranate peel as a new adsorbent. *Desalination* **223**(1–3), 162–173.
- Erdem, E., Karapinar, N. & Donat, R. 2004 The removal of heavy metal cations by natural zeolites. *Journal of Colloid and Interface Science* **280**(2), 309–314.
- Freundlich, H. 1906 Concerning adsorption in solutions. *Zeitschrift Fur Physikalische Chemie–Stoichiometrie Und Verwandtschaftslehre* **57**(4), 385–470.
- Gorme, J. B., Maniquiz, M. C., Kim, S. S., Son, Y. G., Kim, Y.-T. & Kim, L.-H. 2010 Characterization of bottom ash as an adsorbent of lead from aqueous solutions. *Environmental Engineering Research* **15**(4), 207–213.
- Hasan, S. H., Talat, M. & Rai, S. 2007 Sorption of cadmium and zinc from aqueous solutions by water hyacinth (*Eichhornia crassipes*). *Bioresource Technology* **98**(4), 918–928.
- Hashem, A., Abdel-Halim, E., El-Tahlawy, K. F. & Hebeish, A. A. 2005 Enhancement of the adsorption of Co (II) and Ni (II) ions onto peanut hulls through esterification using citric acid. *Egyptian Journal of Chemistry* **23**(5), 367–380.
- Hashem, A., Akasha, R., Ghith, A. & Hussein, D. J. E. E. S. T. 2007 Adsorbent based on agricultural wastes for heavy metal and dye removal: a review. *Energy Education Science and Technology* **19**, 69–86.
- Ho, Y.-S. & McKay, G. 1999 Pseudo-second order model for sorption processes. *Process Biochemistry* **34**(5), 451–465.
- Hossain, M. E., Ritt, C. L., Almeelbi, T. B. & Bezbaruah, A. N. 2018 Biopolymer beads for aqueous phosphate removal: possible applications in Eutrophic Lakes. *Journal of Environmental Engineering* **144**(5).
- Islam, M. S., Ahmed, M. K., Habibullah-Al-Mamun, M. & Hoque, M. F. 2015a Preliminary assessment of heavy metal contamination in surface sediments from a river in Bangladesh. *Environmental Earth Sciences* **73**(4), 1837–1848.
- Islam, M. S., Ahmed, M. K., Raknuzzaman, M., Habibullah-Al-Mamun, M. & Islam, M. K. 2015b Heavy metal pollution in surface water and sediment: a preliminary assessment of an urban river in a developing country. *Ecological Indicators* **48**, 282–291.
- Kadirvelu, K. & Namasivayam, C. 2000 Agricultural by-product as metal adsorbent: sorption of lead (II) from aqueous solution onto coirpith carbon. *Environmental Technology* **21**(10), 1091–1097.
- Kadukova, J. & Vircikova, E. 2005 Comparison of differences between copper bioaccumulation and biosorption. *Environment International* **31**(2), 227–232.
- Karnib, M., Kabbani, A., Holail, H. & Olama, Z. 2014 Heavy metals removal using activated carbon, silica and silica activated carbon composite. *Energy Procedia* **50**, 113–120.
- Khlifi, R. & Hamza-Chaffai, A. 2010 Head and neck cancer due to heavy metal exposure via tobacco smoking and professional exposure: a review. *Toxicology and Applied Pharmacology* **248**(2), 71–88.
- Kouraim, M., Farag, N., Sadeak, S. & Gado, M. A. 2014 Extraction of uranium using impregnated hydrophobic water hyacinth roots. *International Journal of Chemical Studies* **2**(4), 10–19.
- Lagergren, S. 1898 About the theory of so-called adsorption of soluble substances. *Kungliga Svenska Vetenskapsakademiens Handlingar* **24**, 1–39.
- Langmuir, I. 1918 The adsorption of gases on plane surfaces of glass, mica and platinum. *Journal of the American Chemical Society* **40**, 1361–1403.
- Lim, J., Kang, H.-M., Kim, L.-H. & Ko, S.-O. 2008a Removal of heavy metals by sawdust adsorption: equilibrium and kinetic studies. *Environmental Engineering Research* **13**(2), 79–84.
- Lim, S.-F., Zheng, Y.-M., Zou, S.-W. & Chen, J. P. 2008b Characterization of copper adsorption onto an alginate encapsulated magnetic sorbent by a combined FT-IR, XPS, and mathematical modeling study. *Environmental Science & Technology* **42**(7), 2551–2556.
- Liu, C.-C., Wang, M.-K., Chiou, C.-S., Li, Y.-S., Lin, Y.-A. & Huang, S.-S. 2006 Chromium removal and sorption mechanism from aqueous solutions by wine processing waste sludge. *Industrial and Engineering Chemistry Research* **45**(26), 8891–8899.
- Malik, A. 2007 Environmental challenge vis a vis opportunity: the case of water hyacinth. *Environment International* **33**(1), 122–138.
- McKay, G., Blair, H. S. & Gardener, J. R. 1982 Adsorption of dyes on chitin. I. equilibrium studies. *Journal of Applied Polymer Science* **27**(8), 3043–3057.
- Moreno-Piraján, J. & Giraldo, L. 2010 Study of activated carbons by pyrolysis of cassava peel in the presence of chloride zinc. *Journal of Analytical and Applied Pyrolysis* **87**(2), 288–290.
- Mukaratirwa-Muchanyereyi, N., Kugara, J. & Zaranyika, M. F. 2016 Surface composition and surface properties of water hyacinth (*Eichhornia crassipes*) root biomass: effect of mineral acid and organic solvent treatment. *African Journal of Biotechnology* **15**(21), 897–909.
- Munagapati, V. S., Yarramuthi, V., Nadavala, S. K., Alla, S. R. & Abburi, K. 2010 Biosorption of Cu (II), Cd (II) and Pb (II) by *Acacia leucocephala* bark powder: kinetics, equilibrium and thermodynamics. *Chemical Engineering Journal* **157**(2–3), 357–365.
- Neto, C. P., Rocha, J., Gil, A., Cordeiro, N., Esculcas, A., Rocha, S., Delgadillo, I., De Jesus, J. P. & Correia, A. J. 1995 ¹³C solid-state nuclear magnetic resonance and Fourier transform infrared studies of the thermal decomposition of cork. *Solid State Nuclear Magnetic Resonance* **4**(3), 143–151.

- Ngah, W. W. & Hanafiah, M. 2008 Removal of heavy metal ions from wastewater by chemically modified plant wastes as adsorbents: a review. *Bioresource Technology* **99**(10), 3935–3948.
- Osman, O., Atia, F., Hakeem, N. A., Al-Neklawy, M. & Fahem, A. 2010 Molecular spectroscopic study of water hyacinth collected from different media. *Australian Journal of Basic and Applied Sciences* **4**(12), 6134–6139.
- Ozdemir, S., Kilinc, E., Poli, A., Nicolaus, B. & Guven, K. 2009 Biosorption of Cd, Cu, Ni, Mn and Zn from aqueous solutions by thermophilic bacteria, *Geobacillus toebii* sub. sp. decanicus and *Geobacillus thermoleovorans* sub. sp. stromboliensis: equilibrium, kinetic and thermodynamic studies. *Chemical Engineering Journal* **152**(1), 195–206.
- Pandey, K. K. & Pitman, A. J. 2003 FTIR studies of the changes in wood chemistry following decay by brown-rot and white-rot fungi. *International Biodeterioration & Biodegradation* **52**(3), 151–160.
- Parikh, V. M. 1974 *Absorption Spectroscopy of Organic Molecules*. Addison Wesley Publishing Company, Reading, UK.
- Parvathi, K., Nagendran, R. & Nareshkumar, R. 2007 Lead biosorption onto waste beer yeast by-product: a means to decontaminate effluent generated from battery manufacturing industry. *Electronic Journal of Biotechnology* **10**(1), 92–105.
- Penfound, W. T. & Earle, T. T. 1948 The biology of the water hyacinth. *Ecological Monographs* **18**(4), 447–472.
- Poddar, K., Mandal, L. & Banerjee, G. 1991 Studies on water hyacinth (*Eichhornia crassipes*)- chemical composition of the plant and water from different habitats. *Indian Veterinary Journal* **68**(9), 833–837.
- Rahman, M. S., Saha, N. & Molla, A. H. 2014 Potential ecological risk assessment of heavy metal contamination in sediment and water body around Dhaka export processing zone, Bangladesh. *Environmental Earth Sciences* **71**(5), 2293–2308.
- Rampley, C. P. N., Whitehead, P. G., Softley, L., Hossain, M. A., Jin, L., David, J., Shawal, S., Das, P., Thompson, I. P., Huang, W. E., Peters, R., Holdship, P., Hope, R. & Alabaster, G. 2020 River toxicity assessment using molecular biosensors: heavy metal contamination in the Turag-Balu-Buriganga river systems, Dhaka, Bangladesh. *Science of the Total Environment* **703**.
- Reddy, D. H. K., Seshaiiah, K., Reddy, A., Rao, M. M. & Wang, M. 2010 Biosorption of Pb²⁺ from aqueous solutions by *Moringa oleifera* bark: equilibrium and kinetic studies. *Journal of Hazardous Materials* **174**(1–3), 831–838.
- Reddy, D. H. K., Lee, S.-M. & Seshaiiah, K. 2012 Removal of Cd (II) and Cu (II) from aqueous solution by agro biomass: equilibrium, kinetic and thermodynamic studies. *Environmental Engineering Research* **17**(3), 125–132.
- Rezania, S., Ponraj, M., Din, M. F. M., Songip, A. R., Sairan, F. M. & Chelliapan, S. 2015 The diverse applications of water hyacinth with main focus on sustainable energy and production for new era: an overview. *Renewable and Sustainable Energy Reviews* **41**, 943–954.
- Saraswat, S. & Rai, J. 2010 Heavy metal adsorption from aqueous solution using *Eichhornia crassipes* dead biomass. *International Journal of Mineral Processing* **94**(3–4), 203–206.
- Sarkar, M., Rahman, A. & Bhoumik, N. C. 2017 Remediation of chromium and copper on water hyacinth (*E. crassipes*) shoot powder. *Water Resources and Industry* **17**, 1–6.
- Shafy, H., Farid, M. R. & El-Din, A. 2016 Water-hyacinth from Nile River: chemical contents, nutrient elements and heavy metals. *Egyptian Journal of Chemistry* **59**(2), 131.
- Shin, E. W., Karthikeyan, K. & Tshabalala, M. A. 2007 Adsorption mechanism of cadmium on juniper bark and wood. *Bioresource Technology* **98**(3), 588–594.
- Siboni, M. S., Samarghandi, M., Azizian, S., Kim, W. & Lee, S. 2011 The removal of hexavalent chromium from aqueous solutions using modified holly sawdust: equilibrium and kinetics studies. *Environmental Engineering Research* **16**(2), 55–60.
- Smith, B. C. 2016 *The Infrared Spectroscopy of Alkenes Spectroscopy* 31 (11), 28–34.
- Southichak, B., Nakano, K., Nomura, M., Chiba, N. & Nishimura, O. 2006 *Phragmites australis*: a novel biosorbent for the removal of heavy metals from aqueous solution. *Water Research* **40**(12), 2295–2302.
- Sundari, M. T. & Ramesh, A. 2012 Isolation and characterization of cellulose nanofibers from the aquatic weed water hyacinth – *Eichhornia crassipes*. *Carbohydrate Polymers* **87**(2), 1701–1705.
- Tan, K. H. 2010 *Principles of Soil Chemistry*. CRC Press, Boca Raton, FL.
- Vadivelan, V. & Kumar, K. V. 2005 Equilibrium, kinetics, mechanism, and process design for the sorption of methylene blue onto rice husk. *Journal of Colloid and Interface Science* **286**(1), 90–100.
- Whitehead, P. G., Bussi, G., Peters, R., Hossain, M. A., Softley, L., Shawal, S., Jin, L., Rampley, C. P. N., Holdship, P., Hope, R. & Alabaster, G. 2019 Modelling heavy metals in the Buriganga River System, Dhaka, Bangladesh: impacts of tannery pollution control. *Science of the Total Environment* **697**, 134090.
- Xiaofu, W., Fang, Z., Mingli, C., Yangli, Z., Chong, Z. & Hailan, Z. 2008 Factors affecting the adsorption of Zn²⁺ and Cd²⁺ ions from aqueous solution onto vermiculite. *Adsorption Science & Technology* **26**(3), 145–155.
- Yan, G. & Viraraghavan, T. 2003 Heavy-metal removal from aqueous solution by fungus *Mucor rouxii*. *Water Research* **37**(18), 4486–4496.
- Zhang, Q., Achal, V., Xu, Y. & Xiang, W.-N. 2014 Aquaculture wastewater quality improvement by water spinach (*Ipomoea aquatica* Forsskal) floating bed and ecological benefit assessment in ecological agriculture district. *Aquacultural Engineering* **60**, 48–55.
- Zheng, J.-C., Feng, H.-M., Lam, M. H.-W., Lam, P. K.-S., Ding, Y.-W. & Yu, H.-Q. 2009 Removal of Cu (II) in aqueous media by biosorption using water hyacinth roots as a biosorbent material. *Journal of Hazardous Materials* **171**(1–3), 780–785.
- Zhu, B., Fan, T. & Zhang, D. 2008 Adsorption of copper ions from aqueous solution by citric acid modified soybean straw. *Journal of Hazardous Materials* **153**(1–2), 300–308.

First received 30 June 2020; accepted in revised form 10 January 2021. Available online 22 January 2021