

Blue and gray water footprint of some Hungarian milking parlors

Cecilia Hodúr^a, Virág Nagypál^{b,*}, Ákos Fazekas^b and Edit Mikó^c

^a Biosystems Engineering department, University of Szeged, 9 Moszkvai krt., Szeged, Hungary

^b Environmental Sciences Doctoral School, University of Szeged, H-6720, Rerrich B. square 1., Szeged, Hungary

^c Faculty of Agriculture, University of Szeged, Andrásy street 15, H-6800 Hódmezővársárhely, Hungary

*Corresponding author. E-mail: nagypalvirrag@gmail.com

 CH, 0000-0002-2028-6304

ABSTRACT

Unpredictable weather conditions urge us to find sustainable water management solutions. This research gives examples for dairy farmers on how to assess water use, calculate water footprint (WF), and find water-saving opportunities. Three large-scale Hungarian dairy farms were selected to assess water use and WF based on characteristics that answer to this research's hypothesis: there is a correlation between milking technology and WF. The WF of feeding was excluded from this research. In a farm using a parallel milking system (Farm_{pl}), the amount of service water, and thus the footprint of blue water, was the highest, more than twice at the polygon (Farm_{poly}) or robotic (Farm_{rob}) milking parlor service water. The milking robot was less advantageous in water use than polygon milking. The gray water footprint was the most unfavorable for Farm_{rob}. If blue, green, and gray WFs are clarified within a farm, it will be easier to investigate the water uses of dairy farms and assess the ratio of each water category. These data can serve as the basis for dairy farmers dealing with Holstein Friesian cattle for assessment of their water management. The novelty of this research is that no study has investigated the relationship between milking technology and WF.

Key words: dairy cattle, sustainable, water footprint, water use

HIGHLIGHT

- Novelty of this research is that no study has investigated the relationship between milking technology and WF comparing the traditional and robotic milking systems in Hungary.

1. INTRODUCTION

Sustainable use of natural resources for agri-food systems has come into the focus of research lately (McLaughlin & Kinzelbach 2015). In terms of water consumption, two main components of agriculture are crop production, where the demand for irrigation water is primarily significant, and livestock production, where irrigation water used for fodder production is present in addition to drinking water consumption. Agriculture represents 69% of global water use (FAO 2016). Water-related issues are getting serious in water scarcity areas due to overexploitation of freshwater resources. Mitigation strategies should assess social, ecological, and economic contexts, which are basic pillars of sustainability (Borsato *et al.* 2018). Water scarcity is made more severe by temperature increases and by a reduction in precipitation. Extreme climate events such as drought or storms affect water availability and the capacity of water supply services from ecosystems to society. Current water sources should be preserved for future generations at least in the same condition as they were inherited from ancestors. Reasonable water use, reuse, recycling, and desalination are the most promising water stress solutions (Peters 2019). Increasing water demand, progressive application of resource-efficient technologies, and rising acceptance of purified water are the driving forces in the current situation, which is that one-fifth of the population live in water-scarce areas. According to WWF (World Wide Fund for Nature 2010), habitat destruction, species extinction, and agricultural market prices could become more serious by the increment in the water footprint (WF) of water-scarce areas.

This is an Open Access article distributed under the terms of the Creative Commons Attribution Licence (CC BY 4.0), which permits copying, adaptation and redistribution, provided the original work is properly cited (<http://creativecommons.org/licenses/by/4.0/>).

1.1. WF a comprehensive tool for assessing water use

Quantity of WF refers to the water amount that is required for long-term sustainability of population considering given standard of living (Hoekstra & Chapagain 2007). However, when WF is assessed in agriculture, factors such as extreme climatic conditions (drought, flood), soil characteristics, and agricultural potential all can result in different WF levels (Kumar & Singh 2005). The WF concept, which is a quantitative and qualitative indicator, was introduced by Hoekstra & Hung (2002). It is quantitative since it calculates the volume of water consumption to produce goods or services during their total supply chains, and it is qualitative since it assesses the amount of water required to assimilate pollutants based on the water quality standard in an ecosystem (Chapagain & Hoekstra 2004). WF analyzes the possible reduction of wasting water caused by production and consumption activities (Borsato *et al.* 2018). However, it also means a qualitative load according to the local water resource availability (Galli *et al.* 2012; Pfister & Bayer 2014). The WF of an individual, community, or business is the total volume of freshwater that is used to produce the goods and services consumed by the individual or community or produced by the business. Blue WF can be defined as blue water consumption from surface and groundwater resources through the total supply chain of a product. Consumption refers to water loss from ground waterbodies in a catchment area by evaporation, returning to another catchment area, or incorporation into a product. The green WF is the part of rainwater that undergoes evapotranspiration by crops and feeds the animals. The gray WF considers the freshwater volume required to assimilate a certain pollutant load that meets water quality standards of the region or country. The concept of gray WF expresses pollution volume, and thus can be compared with the volume of water consumption (Hoekstra & Chapagain 2007). Gray WF is interesting, if polluted water can be reused after different kinds of wastewater treatments. If treated water reaches the quality standards of irrigation water, it will decrease the negative impact of the system on the environment. Therefore, the production could be more sustainable environmentally. If this treated gray water can substitute for blue water for irrigation, the production might be more sustainable in an economic way as well. For being able to develop strategies for sustainable water use, green, blue, and gray WF elements of the WF indicator should be analyzed in more detail (Vanham & Bidoglio 2013).

1.2. WF of the animal sector

'The global water footprint of animal production amounts to 2,422 billion m³/year (87% green, 6% blue, 7% gray). One-third of this total is related to beef cattle, and another 19% is related to dairy cattle' (Mekonnen & Hoekstra 2010). 98% of the WF of animals refers to feed. Drinking, service, and mixing water account for the remaining 2%. Relationships between livestock production and water use have come into focus to understand the distribution and demands for fresh water in livestock production (Ridoutt & Pfister 2010). Production of animal-sourced food in a resource-efficient way is one of the biggest challenges in future food sustainability (Steinfeld *et al.* 2013; Aiking 2014). Global water use for livestock production is 2.422 billion m³/year (Hoekstra 2012).

1.3. WF of dairy cattle

Dairy farming is highly water-intensive, although water use efficiency varies by region and animal species (Singh *et al.* 2004). Dairy cattle's WF accounts for 19% (460 million m³/year) of the global animal WF (Mekonnen & Hoekstra 2010). The biggest part of animal WF (98%) is related to feed production. The remaining part consists of drinking and service water for washing and cooling (Hoekstra 2012). The proper amount of drinking water is required for dairy cattle for sustaining animal health, milk production, and comfort (LeJeune *et al.* 2001). 83% of the total water requirement of dairy cattle consists of drinking water. Temperature determines how dairy cows behave (Meyer *et al.* 2004; Car *et al.* 2008), revealed that the comfort range of dairy cattle is between -5 and 21 °C. Besides environmental factors, milking technology, management, and milk yield also have an impact on water use. Equipment and management influence the technical water use of a dairy farm. However, it has to be taken into account that there is no single water requirement for a species or an individual. These hotspots might be useful for farmers and experts in this field to make their production more cost efficient related to water use. According to the study of Gough *et al.* (2010) from Michigan, in areas where water availability is low there is competition for water between different types of users; thus making water use of dairies more efficient is crucial for the future. Our work aimed to find the reasons for the difference in water use and water footprints of the studied dairy farms, with special regard to the applied milking technologies, i.e. the hypothesis of this work: there is a correlation between milking technology and WF. The outcomes of this research contribute to defining national strategies to improve water efficiency of Hungarian milk production. The WF of Hungarian dairy farms applying farm-specific data is incomplete.

2. METHODS

2.1. Farm site and milking characteristics

Three large-scale dairy farms (300–500 Holstein Friesian dairy cows) were selected based on the characteristics on which the hypothesis of this research focused on. These were located in the southeast part of Hungary. The annual average temperature is 9–10 °C, annual average precipitation is 500 mm. Three large-scale Hungarian dairy farms were selected to assess water use and WF based on characteristics of this research's hypothesis: there is a correlation between milking technology and WF. The WF of feeding was excluded from this research. The milking technology was different: 2×12 parallel in Farm_{pl}, 4×8 polygon in Farm_{poly}, and robotic in Farm_{rob}. In the parallel milking system, cows stand parallel to each other, so workers can reach the udder at the rear end. The milking process starts when all cows are in their stalls, i.e. one flock is 24 cows in one milking tour, and they are all released from the parlor at the same time. In the polygon milking parlor, the milking machines are positioned in the middle – the ‘spine’ of the fish – between two aisles with room for the cows. The cows come into the parlor, and line up between each ‘fish bone’, creating two rows of cows. The herd is 32 cows. In the case of robotic milking, when a cow enters the pen, an ID tag is scanned that tells the system when the cow was last milked, how the udder is shaped, and the rate at which each teat dispenses milk. Robotic arms simultaneously sanitize and stimulate the teats, prompting the cow to let down milk. The monitoring period included data collection from August 2018 and August 2019. Herd information was collected from farm management software (RISKA), and farm records provided by farm managers and employees. Taking into account the feeding technology of investigated farms, total mixed rations (TMR) were fed on Farm_{pl} and Farm_{poly}, containing all ingredients mixed and delivered to the cow for proper milk production and reproductive health. A partially mixed ration (PMR) containing all the forage and some of the concentrate was offered in the feed bunk in the case of Farm_{rob}. An additional amount of concentrate was fed through the robotic milking system during milking which amount varied according to the cow's stage of lactation. The main farm site characteristics of the investigated farms can be seen in Table 1.

Table 1 | Farm site characteristics of Farm_{pl}, Farm_{poly}, and Farm_{rob}

	Farm _{pl}	Farm _{poly}	Farm _{rob}
The average number of lactating cows	218	534	522
The average number of milkings per day	436	1,602	1,461
Feeding	TMR	TMR	PMR
Average body weight of cows	597	588	573
Daily milk production (L)	5,552	19,507	18,755
Daily milk production/cow (L/cow)	25.47	36.53	35.93

2.2. Water use of dairy farms

A bluewater source was ensured through piped water on Farm_{pl}, supplied from water station of a nearby village. On Farm_{poly}, a water tower pulled water from a 365 m depth driven well. On Farm_{rob}, water was supplied from a 300 m depth driven well. Drinking water, water used in the milking parlor (washing udders, washing platform, and milking equipment), and milk tank washing were all assessed on investigated farms. On Farm_{pl} and Farm_{poly}, automatic inside and manual outside washing of milking equipment, and platform were applied too. During the time of milking, after one row of cows was milked, manure and urine were washed away from the platform. After all cows were milked, the walls and surface of the platform, and milking equipment were carefully washed off manually by a water hose. On Farm_{pl} and Farm_{poly}, daily milking was always followed by milking machine washes. There were three stages in the daily internal washing of the milking equipment. The first warm water wash was performed for five minutes, the second stage was the main wash with hot water; with acidic detergent once a week, and with alkaline detergent on the other days of the week, and in the third stage the cold-water wash took place. At pre-milking teat preparation, a teat wash spray gun was applied on Farm_{pl}. This involved washing teats by hand with water and drying teats with a paper towel, just before the machine was attached. On Farm_{poly}, teat-preparation applied paper soaked with disinfection detergent, therefore it was made without water. On Farm_{rob}, a robotic milking system applied an automatic program for washing pre-treatment cups and the liner

by brief and thorough steam-cleaning after each milking. Automatic inside washing of the whole system happened 4 times a day and an additional manual outside global washing of the robotic system occurred 3 times a day. Additional contamination from the outside part of the robot was cleaned manually 8 times a day. Teat preparation was carried out by water on Farm_{rob}. The pre-treatment, extensive steam cleaning, and udder spray system ensure the best possible udder health (SAC 2021).

Blue water was used in the milk house for milk tank washing on all farms. Wastewater was collected into water pits, which finally flowed into one pool on all farms. The main data about water use of investigated farms can be seen in Table 2.

Table 2 | Water use on Farm_{pl}, Farm_{poly}, and Farm_{rob}

	Farm _{pl}	Farm _{poly}	Farm _{rob}
Water source	piped	driven well	driven well
Washing of milking equipment.	automatic	automatic	automatic
Platform washing	manual	manual	manual
Pre-milking teat preparation method	water hose wash	teat sanitizer paper	teat cleaner cup
Type of milking system	2×12 parallel system milking parlor	4×8 polygon parlor with herringbone stands	automatic robotic milking system

2.3. Calculation of drinking water consumption

Stock size data and data of lactating cows during the observation period on Farm_{pl}, Farm_{poly}, and Farm_{rob} were taken from the farm monitoring system of each farm. The average number of lactating cows was 218 on Farm_{pl}, 534 on Farm_{poly}, and 522 on Farm_{rob}. Drinking water consumption of lactating cows (DWC; liter/day) was calculated using the equation of Meyer *et al.* (2004):

$$DWC = -26.12 + 1.516(t_{average}) + 1.29(m_{milk\ prod}) + 0.058(m_{bodyweight}) + 0.46m_{Na} \quad (1)$$

where $t_{average}$ is the average temperature value, $m_{milk\ prod}$ is the daily quantity derived from daily milking (kg/day), $m_{bodyweight}$ is the bodyweight of animals (kg), and m_{Na} is the quantity of daily sodium intake (g/day).

To determine the bluewater quantity used for the production of 1 liter of milk, the daily milk amount was corrected to a unified 4% fat and 3.3% protein, as suggested by FAO (2021). It is a means of evaluating milk production records of different dairy animals and breeds on a common energy basis.

$$FPCM = milk\ amount \left(\frac{kg}{day} \right) \cdot (0.337 + (0.116 \cdot fat\%) + (0.06 \cdot protein\%)) \quad (2)$$

2.4. Determination of service water use

Daily service water use included water use consisting of washing of milking equipment, platform washing, udder preparation, and washing milk tanks in the milk house. Water use for inner washing of milking equipment was determined based on the product description of milking equipment on each farm. Exact data were given on how many water is used per each washing for the inner cleaning of milking equipment. For assessing outside washing of milking equipment and platform washing, average daily water use was determined by a water meter and own measurement considering how much m³ water was used by workers during and after each milking. Milk tank washing water use was determined based on how much water was used daily by the automatic system for milk tank cleaning.

2.5. Blue WF calculation

Mekonnen & Hoekstra (2012) calculated the total WF of dairy farms based on the equation

$$WF_{(a,c,s)} = WF_{feed\ (a,c,s)} + WF_{drink\ (a,c,s)} + WF_{serv\ (a,c,s)} \quad (3)$$

where $WF_{(a,c,s)}$ relates to the water footprint of an animal for animal category (a), in country (c), and in production systems (s) considering feed, drinking water, and service-water consumption, respectively. WF_{drink} means the WF of animal drinking, WF_{serv} relates to service WF refers to technical water use. The WF of an animal and its three components were expressed in terms of $m^3/y/animal$. However, the WF of feed was not included in this research because the average amount and composition of the feed was the same at farms, only feed dosage differed. In our research, only the bluewater used during milking was taken into consideration, apart from the water used in the lavatories and the cooling water of cows that is used against heat stress during summertime.

2.6. Gray WF calculation

In the case of point sources of water pollution, when chemicals are directly released into a surface water body in the form of wastewater disposal, the load can be estimated by measuring the effluent flow, and the concentration of a chemical in the effluent (Hoekstra 2011).

$$WF_{process, grey} = \frac{L}{c_{max} - c_{nat}} = \frac{Effl \cdot c_{effl} - Abstr \cdot c_{act}}{c_{max} - c_{nat}} \quad (4)$$

where $WF_{process, grey}$ is the gray WF of a process, it shows the pollutant load (mass/time), c_{max} is the maximum acceptable concentration of pollutant (mass/volume), c_{nat} is the natural concentration in the receiving water body (mass/volume), $Effl$ is the effluent volume (volume/time), c_{effl} is the concentration of the pollutant in the effluent (mass/volume), $Abstr$ is the water volume of the abstraction (volume/time) and c_{act} is the actual concentration of the intake water (mass/volume). The water volume of the abstraction and actual concentration of the intake water were excluded from the calculation as wastewater streams through a closed sewage system so no evaporation occurs. Therefore, gray WF was calculated by the following equation:

$$WF_{grey} = \frac{L}{c_{max} - c_{nat}} = \frac{Effl \cdot c_{effl}}{c_{max} - c_{nat}} \quad (5)$$

Chemical oxygen demand (COD) tests were taken from wastewater pits from each farm to determine the concentration of the pollutant in the effluent. COD was analyzed in test tubes with an ET 108 digester and a PC CheckIt photometer (Lovibond, Germany). The digestion was done at 150 °C for 2 hours, as the measurement protocol requires. The official limit value for discharge into the public sewer is 1,000 mg/L COD based on Hungarian wastewater management standards. The natural pollutant concentration in the receiving water body was 4 mg/L as that was the average pollutant concentration of tap water in Hungary. Gray water footprint (WF_{grey}) was calculated based on COD as a pollutant characteristic (Eq.6).

$$WF_{grey} = \frac{\text{daily load of gray water} \frac{l}{day} \times \text{COD of local samples} \frac{mg}{l}}{\text{max acceptable concentration of pollutant} - \text{natural concentration in the receiving water body} \frac{\text{mass}}{\text{volume}}} \quad (6)$$

3. RESULTS AND DISCUSSION

To determine the blue and gray WFs of the milking parlors, we summed the water consumption of the dairy cows as well as the so-called service water demand, and the pollution value of each contamination point, expressed in COD.

3.1. Drinking water consumption

To calculate drinking water demand, the Equation (1) was used. For comparability, the amount of daily drinking water per cow is given, and the amount of drinking water per liter of produced milk, and per litre of FPCM milk was also calculated. The results of calculation i.e. the average daily water consumption (L/cow), average daily milk production (L/cow), specific daily water consumption (SWC) in (L_{water}/L_{milk}), and normalized daily water demand (NWD) in ($L_{water}/L_{FPCMmilk}$) are shown in Table 3.

Table 3 | Average daily water consumption, average daily milk production, fat and protein content, fat and protein corrected milk, and specific daily water consumption

	Average daily water consumption (L/cow)	Average daily milk production (L/cow)	FPCM (L/cow)	Specific daily water consumption ($L_{\text{water}}/L_{\text{milk}}$) SWC	Normalized daily water demand ($L_{\text{water}}/L_{\text{FPCM}}$) NWD
Farm _{pl}	87.8	25.47	24.54	3.45	3.61
Farm _{poly}	103.4	36.53	33.80	2.83	3.09
Farm _{rob}	97.1	35.93	35.71	2.70	2.78

Drinking water consumption of cows is influenced by average temperature, the amount of produced milk, the bodyweight of animals, and the quantity of their daily sodium intake. As the geographical distance of the farms is not very long, the average temperatures for the investigated period were almost the same, i.e. temperature difference was no more than 1.8 °C. Digested amount of sodium was the same for the farms (44 g/day). Body weight was determined based on farm measurements. The body weight of the cows ranged from 510 to 790 kg, with a standard deviation of 55 kg between farm results.

The largest difference was detected between the amounts of milk produced per day, and its fat and protein content (Table 1). For a fair comparison, the required amount of water was also given for the amount of fat and protein corrected milk (FPCM). The highest drinking water consumption was for Farm_{poly}, and the highest milk yield as well, but when data were converted to FPCM, the milk yield was no longer the highest, so Farm_{rob} became the most favorable value for normalized dairy water demand, i.e. for the production of 1 liter of FPCM at Farm_{rob} use the least drinking water for cows. The protein and fat content values of the milk-based on the feeding methods, and the subspecies of the cows, but in this case there was no difference in the subspecies, only the feeding methods had differences. On Farm_{pl} and Farm_{poly} TMRs were offered including all ingredients required by cows. However, on Farm_{rob} PMR fodder provoked cows to visit feed banks more often. Therefore, feed use of cows on Farm_{rob} improved, as a result of which these cows were able to achieve the lowest normalized water demand.

3.2. Service water use

Using drinking water for service is an important element of the blue WF. Average daily service water consumption (L/day) data can be seen in Table 4.

Table 4 | Service water amount

	Farm _{pl}	Farm _{poly}	Farm _{rob}
Milk tanks (m ³ /day)	0.17	0.28	0.43
Pre-milking teat preparation (m ³ /day)	2.23	a)	2.68
Inner washing of milking equipment (m ³ /day)	1.36	2.88	2.88
Platform & outside part of milking equipment (m ³ /day)	3.80	5.70	4.20
TOTAL (m³/day)	7.56	8.86	10.19
Daily service water use by one cow (m ³ /day/cow)	0.0346	0.0167	0.0195
Daily service water use by one milking (m ³ /day/milking)	0.0173	0.0055	0.0069

a), teat-preparation applied paper soaked by disinfection detergent, i.e. no water consumption.

Service water consumption for milking includes the amount of water used for external, and internal washing of milking equipment, milk tanks washing, udder preparation, and washing of the floor of the milking parlor. Milk tank washing water amount was primarily influenced by milk tank capacity. Farm_{rob} needed the highest service water for milk tank washing of 2 × 14,000 L milk tank. Then 25,000 L capacity of milk tank from Farm_{poly}, and 9,000 L from Farm_{pl} required lower amounts of service water. Teat preparation on Farm_{pl} was made manually, which requires an average of 5 liters of water per milking, i.e. this meant 2,180 liters water use on Farm_{pl} for udder washing per day. So-called dry teat preparation was used in Farm_{poly}; paper soaked in disinfection detergent was used for this purpose. The robot system manual gave data for calculation of water amount for teat

cleaning in the case of Farm_{rob}. It seemed to be bigger than at Farm_{pl} but the number of the daily milking was much bigger. The number of daily milkings is 436 and 1,461 at Farm_{pl} and Farm_{rob} respectively, i.e., the amount of water used to prepare the udder per milking per day was 5 liters, and 1.8 liter at Farm_{pl} and Farm_{rob} respectively. 1,360 liters of water was needed for the inner washing of the milking system on Farm_{pl}. On Farm_{poly}, the inner washing of the milking system used 2,880 liters of bluewater, and on the farm, this water amount was also 2,880 liters. These data were given from the manual of the equipment.

For washing platform and outside surface of milking equipment, 3,800 litres of bluewater were used daily on Farm_{pl}, 5,700 liters on Farm_{poly}, and 4,200 liters on Farm_{rob}. Summarizing these data, the daily service water use per cow was calculated: 34.6 liters, 16.7 liters, and 19.5 liters for Farm_{pl}, Farm_{poly} and Farm_{rob} respectively. But when the daily service water use was calculated per milking, instead of a number of cows, the results were as follows: 17.3, 5.5, and 6.9 liters for Farm_{pl}, Farm_{poly}, and Farm_{rob} respectively.

3.3. Blue WF

Applying the blue WF equation from Mekonnen & Hoekstra (2012) (Equation (3)), 40.39 m³/year/cow was the blue WF on Farm_{pl}, 42.85 m³/year/cow on Farm_{poly}, and 36.53 m³/year/cow on Farm_{rob}. (Table 5).

Table 5 | Blue WF results in the case of Farm_{pl}, Farm_{poly}, and Farm_{rob}

	Farm _{pl}	Farm _{poly}	Farm _{rob}
Blue WF of drinking water consumption (m ³ /year/cow)	32.04	37.76	35.44
Blue WF of service water (m ³ /year/cow)	12.62	6.09	7.11
Total blue WF (m ³ /year/cow)	44.66	43.85	42.55
Total blue WF (m ³ /year/milking)	22.33	14.61	15.19

The blue WF of drinking represented a significant part of total blue WFs in the case of all farms, and this value per cow was the least at Farm_{pl}, meanwhile, the Farm_{pl} had the highest value of the blue WF of service, and the total blue WF as well (Figure 1). Since a significant part of the total blue WF was the drinking water, and there were no big differences between these data among farms, there were no big differences among the total blue WFs as well. Regarding the blue water footprint of service, data showed Farm_{poly} and Farm_{rob} had almost the same value but Farm_{pl} had as higher as twice. The annual total WF per cow was very similar also, and the smallest WF was measured at Farm_{rob} however, if the values referred to the number of milking, Farm_{poly} had the lowest blue WF value.

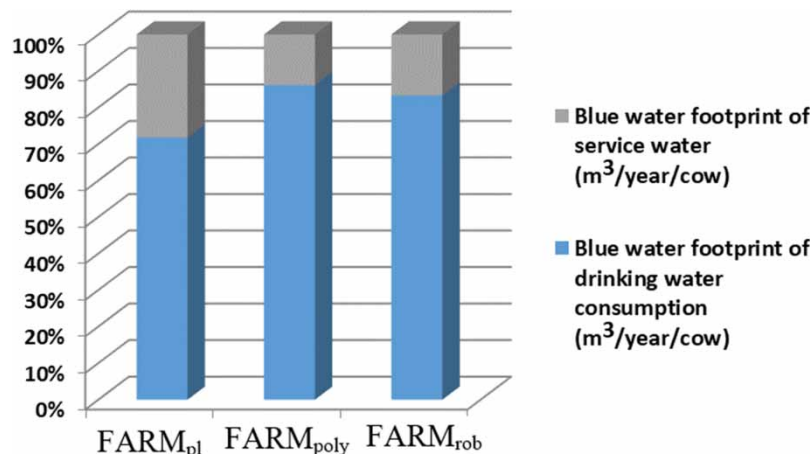


Figure 1 | Percentage distribution of blue WF.

3.4. Gray WF

The basic quantitative data used to calculate the gray WF were essentially the same as the data used for the service blue WF (see Table 4). The key element of calculation was the pollution loading of samples, i.e. their COD. Several samples from the sampling sites were analyzed daily, and the mean values are shown in Table 6.

Table 6 | Results of COD measurements of sampling locations and the average wastewater load

Farm	Sampling location	COD (mg/L)
Farm _{pl}	milk tank	550
	inner washing water of milking system	200
	teat preparation	3,600
	platform and outside washing water of milking system	3,600
Farm _{poly}	milk tank	600
	inner washing water of milking system	300
	platform and outside washing water of milking system	4,900
Farm _{rob}	milk tank	440
	washing robotic system and teat preparation	8,900
	platform and outside washing water of milking system	7,200

The highest COD values are found for the platform, and outside washing of milking system samples, which is understandable since the aim of the floor washing is to remove all contaminants, including feces and urine. In the case of Farm_{pl}, even the high COD value of the udder wash water stood out due to the manual wash. During manual washing, not only the teats but also the entire udder were washed, which meant a large, heavily soiled surface. The calculated gray WF values were shown in Table 7. The least amount of platform wash water (Table 4) and the least polluted platform effluent were detected in Farm_{pl}. Although Farm_{poly} had lower COD, but the amount of wash water used was higher, so the gray WF for all farms was almost the same for platform washing. In the case of Farm_{pl}, in addition to platform washing, the udder preparation increased the size of the gray WF. In the case of Farm_{poly}, no water was used for the teat preparation, so in addition to the decisive role of the floor washing water, the washing water of the milking equipment only slightly modifies the value of the gray WF.

The most obvious reason for the difference in gray WF between farms was due to the washing of the milking (robotic) system detected on Farm_{rob}. It had a high gray WF value of 49.68. This value represents more than half of all gray WFs (see Figure 2), so the gray WF of Farm_{rob} is double the other values (see Table 7). The amount of washing water itself was not the highest, but the COD of it was extremely big, i.e. 8,900 mg/L, meanwhile the other two farms the COD of the milking washing water was 3,600–4,900 mg/L.

Table 7 | Gray WF results of Farm_{pl}, Farm_{poly}, and Farm_{rob}

Farm	Sampling location	Gray water footprint (m ³ /day)	
Farm _{pl}	milk tank	0.09	22.05
	inner washing water of milking system	0.28	
	teat preparation	7.95	
	platform and outside washing water of milking system	13.73	
Farm _{poly}	milk tank	0.17	29.08
	inner washing water of milking system	0.87	
	platform and outside washing water of milking system	28.04	
Farm _{rob}	milk tank	0.18	80.22
	milking (robotic) system and teat preparation	49.68	
	platform and outside washing water of milking system	30.36	

The reason for the discrepancy is in the milking system. In Farm_{pl} and Farm_{poly}, the parallel and polygon milking machines were washed after each milking twice or three times a day by hosepipe manually, to remove manure and urine from the platform. In Farm_{rob}, the surface of the milking robot was washed with a hosepipe applying

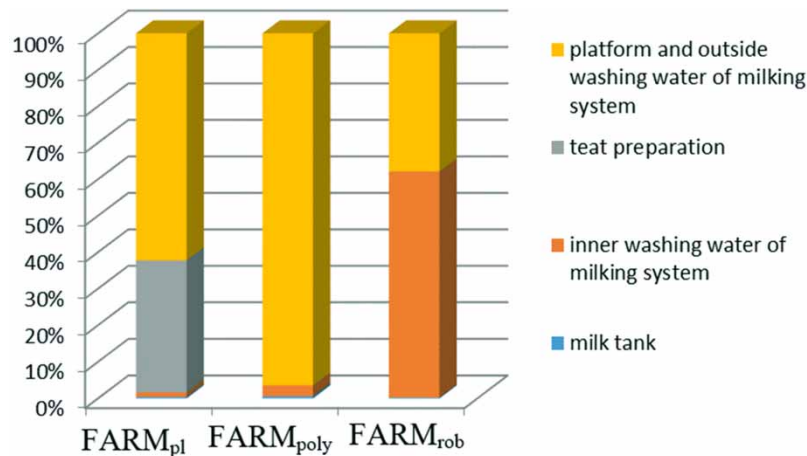


Figure 2 | Percentage distribution of gray WF.

detergent after each cow's milking. Therefore, the amount of wash water is also fundamentally different from other farms, and its COD value is extremely high due to the detergents and milk residue. Clusters of the robotic milking system are washed after each milking (after each cow). Thus, the opportunity of getting infected by sub-clinical mastitis is decreased. In the case of traditional milking systems such as parallel or polygon, this practice is not typical; it just sometimes occurs. As a result of infection, fat %, crude protein %, protein %, and casein % of milk all increase. The reason for this that the decline in milk yield is much bigger (30%) after infection than a daily net synthesis of mentioned parameters. Leukocytes excreted by immune response will form a high portion of somatic cells. Milking itself is a stressor with a high vacuum level. The robotic milking system milks each teat separately. If one teat is fully milked, the cluster comes off to eliminate overmilking. In the case of a traditional milking system all four clusters remain on teats until milk speed is under a certain value. The udder is not symmetric, as the back two udder parts are bigger including more milk. Therefore, the front udder parts are empty while milking is still going on. This is the biggest difference between robotic and traditional milking systems in the context of gentleness.

3.5. Discussion of drinking and service water use results

Ibidhi & Ben Salem (2020) calculated the average drinking and servicing water for lactating cows, which were 24.8 m³/year/cow for drinking water consumption, and 26.64 m³/year/cow for service water use. In this research it was 35 m³/year/cow for drinking water consumption, and 8.614 m³/year/cow for service water use. The reason for difference in drinking water could be the different drinking equipment and process or that the Tunisian dairy breed is much more tolerant against heat stress than the Holstein Friesian breed. Water consumption of a stock is influenced by three main factors: water quality, environmental factors, and stock characteristics: species, type, age, and production (NSW 2014). Furthermore, it is very important to bear in mind that there are no homogenous individual water requirements. Water intake is determined by the physiological state, state of pregnancy, lactation, feeding, temperature, water supply, keeping circumstances, and environmental stress (FAO 2018). The difference in service water use could be because this study focuses on service water use of the milking parlor, and the Tunisian study included cooling of cattle to decrease heat stress, and also cooling water need of milk tanks. Between 1999 and 2008, 3.94 liters was the average bluewater requirement for producing 1 kg of milk (Drastig *et al.* 2010). In this study, 2.49 liters was the average water use of the three investigated farms for producing 1 kg of milk. Boguniewicz-Zablocka *et al.* (2019) certify this result as well by identifying that 1–10 m³ of water is used to produce 1 m³ of milk. Service water use was 22 L/cow/day measured by Chapagain & Hoekstra (2003), which was similar to 20.87 L/cow/day calculated in this research.

3.6. Discussion of water use results of milking technology

There are just a few comprehensive assessments on water use of milking parlors (Palhares & Pezzopane 2015). AgricultureVictoria (2019), found that rotary and swing-over dairies could recycle a much bigger amount of water compared with double herringbones. This study also identified that in Farm_{poly}, the herringbone-structured milking parlor used 1.2 m³/day more water than the parallel type (Table 4). Washing water use of the platform and

outside part of milking equipment used the most amount of water from service water use, which certified the findings of [Usva et al. \(2013\)](#). [Krauß et al. \(2015\)](#) highlighted that cleaning methods for milking equipment and milk tanks are computer-controlled thus these have constant water use. However, cleaning water use of milking parlor depends on the area, worker, system, and farm management. Efficient management of servicing water could reduce blue WF of milk by up to 4% ([Ibidhi & Ben Salem 2020](#)). Based on another study by [Wankhade et al. \(2021\)](#), water use of milking bucket milking equipment was 42 L/cow/day. Compared to this in this research parallel milking equipment used 34.6 L/cow/day polygon milking equipment used 16.7 L/cow/day, and robotic milking equipment used 19.5 L/cow/day of bluewater. That means that from investigated farms the most water-efficient milking equipment is polygon milking equipment, less efficient is robotic milking equipment, and the least efficient is parallel milking equipment. However, all types of milking equipment are better in water-saving than bucket milking equipment. [Krauß et al. \(2016\)](#) reported more water usage for cleaning purposes in the herringbone parlor system. This was certified by this study's results, but with slight differences. The differences can occur due to surface size differences.

3.7. Discussing blue WF results

[Krauß et al. \(2015\)](#) underlined that increasing milk yield increases the water productivity of milk. This was certified in this study, as the farm with the highest average milk production achieved (Farm_{poly} with 37 l average milk production) the best productivity of milk $2.8 L_{\text{water}}/L_{\text{milk}}$. The Farm_{pl} with the lowest average milk production (26 L average milk production) achieved the worst productivity of milk ($3.45 L_{\text{water}}/L_{\text{milk}}$).

CONCLUSIONS

Our work aimed to find reasons for the difference in water use and WFs of studied dairy farms, considering milking technologies. The hypothesis of this work was that there is a correlation between milking technology and WF. Measurement-based analyses showed that our basic hypothesis was correct. The value of the gray WF is determined by the milking system. There is no significant difference between the blue WF values for cows on the farms studied. Drinking water accounts for the largest share of total blue WFs, 71.86, and 83% on Farm_{pl} Farm_{poly} and Farm_{rob} respectively. It depended primarily on the milk yield, i.e. in our case, it depended on the method of feeding. Service water use is the part where savings can be achieved. In the case of Farm_{pl}, which uses a parallel milking system, the amount of service water, and thus the footprint of bluewater is the highest, more than twice as much as polygon or robotic service water amount. It can also be seen from the figure that milking using a robot is less advantageous in water use than polygon milking. The gray WF was the most favorable for Farm_{rob}, where robot milking is used, which is consistent with [Thomson's \(2018\)](#) studies. The biggest difference is caused by the robotic washing system. Here rinsing/washing was also used, even if it was short, but after each cow, it was done in addition to the daily detergent washes.

All in all, the polygon milking arrangement is most advantageous from the point of view of the WF, beating the parallel milking arrangement, and much better than robotic milking.

DATA AVAILABILITY STATEMENT

All relevant data are included in the paper or its Supplementary Information.

CONFLICT OF INTEREST

The authors declare there is no conflict.

REFERENCES

- Aiking, H. 2014 Protein production: planet, profit, plus people? *American Journal of Clinical Nutrition* **100**, 483–489.
- Boguniewicz-Zablocka, J., Klosok-Bazan, I. & Naddeo, V. 2019 Water quality and resource management in the dairy industry. *Environmental Science and Pollution Research* **26**(2), 1208–1216.
- Borsato, E., Tarolli, P. & Marinello, F. 2018 Sustainable patterns of main agricultural products combining different footprint parameters. *Journal of Cleaner Production* **179**, 357–367.
- Car, V., Le Roux, Y. & Jurjan, S. 2008 Drinking behavior of lactating dairy cows and prediction of their water intake. *Journal of Dairy Science* **91**, 2257–2264.

- Chapagain, A. K. & Hoekstra, A. Y. 2003 Virtual water flows between nations in relation to trade in livestock and livestock products In *Value of Water Research Report*. Series No. 13 UNESCO-IHE; Institute for Water Education, Delft, Netherlands.
- Chapagain, A. K. & Hoekstra, A. Y. 2004 *Volume 1: Main Report. Main 1*. p. 80. Available from: <https://www.waterfootprint.org/media/downloads/Report16Vol1.pdf> (accessed 09/05/2022).
- Drastig, K., Prochnow, A., Kraatz, S., Klaus, H. & Pochl, M. 2010 Water footprint analysis for the assessment of milk production in Brandenburg (Germany). *Advances in Geosciences* **27**, 65–70.
- FAO 2016 AQUASTAT – FAO's Global Information System on Water and Agriculture. Available from: http://www.fao.org/nr/water/aquastat/water_use/index.stm.
- FAO 2018 *Water Use of Livestock Production Systems and Supply Chains*. Available from: <http://www.fao.org/3/I9692EN/i9692en.pdf> (Accessed 07/12/2020).
- FAO 2021 *Fat–Corrected Milk*. Available from: <http://www.fao.org/dairy-production-products/resources/glossary/en/> (accessed 05/03/2021).
- Galli, A., Wiedmann, T., Ercin, E., Knoblauch, D., Ewing, B. & Giljum, S. 2012 Integrating ecological carbon and water footprint into a 'footprint family' of indicators: definition and role in tracking human pressure on the planet. *Ecological Indicators* **16**, 100–112. <http://dx.doi.org/10.1016/j.ecolind.2011.06.017>.
- Gough, J., Wilson, D., Cronin, B., Sanchez, A., Wilson, J., Shirey, G., Cahill, M. & Carpenter, F. 2010 *Charting the Course for Sustainability at Aurora Organic Dairy Phase II: Energy, Greenhouse Gas, Nutrient Use, Water Use, and Solid Waste Generation Life Cycle Assessment, A Project Submitted in Partial Fulfillment of Requirements for the Degree of Master of Science in Natural Resources and Environment The University of Michigan*. Available from: <https://deepblue.lib.umich.edu/bitstream/handle/2027.42/69242/Aurora?sequence=1> (Accessed 06/06/2018).
- Hoekstra, A. Y. 2011 How sustainable is Europe's water footprint? *Water Waste Water Int.* **26**, 24–26.
- Hoekstra, A. Y. 2012 *The Hidden Water Resource Use Behind Meat and Dairy*. Available from: <https://waterfootprint.org/media/downloads/Hoekstra-2012-Water-Meat-Dairy.pdf> (accessed 13/12/2018).
- Hoekstra, A. Y. & Chapagain, A. K. 2007 Water footprints of nations – water use by people as a function of their consumption pattern. *Water Resources Management* **21**, 35–48.
- Hoekstra, A. Y. & Hung, P. Q. 2002 A quantification of virtual water flows between nations in relation to international crop trade. *Water Research* **49**, 203–209.
- Ibidhi, R. & Ben Salem, H. 2020 Water footprint and economic water productivity assessment of eight dairy cattle farms based on field measurement. *Animal: an International Journal of Animal Bioscience* **14**(1), 180–189. doi:10.1017/s1751731119001526. PMID: 31287037.
- Krauß, M., Kraatz, S., Drastig, K. & Prochnow, A. 2015 The influence of dairy management strategies on water productivity of milk production. *Agricultural Water Management* **147**, 175–186.
- Krauß, M., Drastig, K., Prochnow, A., Rose-Meierhöfer, S. & Kraatz, S. 2016 Drinking and cleaning water use in a dairy cow barn. *Water* **8**, 302. <https://doi.org/10.3390/w8070302>.
- Kumar, D. M. & Singh, O. P. 2005 Virtual water in global food and water policy making: is there a need for rethinking? *Water Resources Management* **19**, 759–789. doi: 10.1007/s11269-005-3278-0.
- Leigh, C. & Farm Services Victoria 2019 *Dairy Shed Water Use in Victoria 2009 Analysis*. Available from 6768: https://agriculture.vic.gov.au/_data/assets/pdf_file/0010/595396/Dairy-Shed-Water-Use-in-Victoria-2009-Analysis.pdf (accessed 09/05/2022).
- LeJeune, J. T., Besser, T. E., Merrill, N. L., Rice, D. H. & Hancock, D. D. 2001 Livestock drinking water microbiology and the factors influencing the quality of drinking water offered to cattle. *Journal of Dairy Science* **84**, 1856–1851.
- McLaughlin, D. & Kinzelbach, W. 2015 Food security and sustainable resource management. *Water Resources Research* **51**, 4966–4985.
- Mekonnen, M. M. & Hoekstra, A. Y. 2010 *The Green, Blue and Gray Water Footprint of Farm Animals and Animal Products. Value of Water Res. Rep. Ser. No. 48*. UNESCO-IHE, Delft, The Netherlands.
- Mekonnen, M. M. & Hoekstra, A. Y. 2012 A global assessment of the water footprint of farm animal products *Ecosystems* **15**, 401–415. <https://doi.org/10.1007/s10021-011-9517-8>
- Meyer, U., Everinghoff, M., Gädeken, D. & Flachowsky, G. 2004 Investigations on the water intake of lactating dairy cows. *Livestock Production Science* **90**(2–3), 117–121.
- NSW 2014 *Water Requirements for Sheep and Cattle*. Available from: https://www.dpi.nsw.gov.au/_data/assets/pdf_file/0009/96273/Water-requirements-for-sheep-and-cattle.pdf
- Palhares, J. C. P. & Pezzopane, J. R. M. 2015 Water footprint accounting and scarcity indicators of conventional and organic dairy production systems. *Journal of Cleaner Production* **93**, 299–307.
- Peters. the 2019 *Improving the Resource Efficiency of Irrigation Using Reverse Osmosis for the Desalination of Brackish Well Water and Salty Sewage Effluents*. F & S International Edition for Filtration and Separation Technologies No. 19/2019, London, UK.
- Pfister, S. & Bayer, P. 2014 Monthly water stress: spatially and temporally explicit consumptive water footprint of global crop production. *Journal of Cleaner Production* **73**, 52–62. <https://doi.org/10.1016/j.jclepro.2013.11.031>.
- Ridoutt, B. G. & Pfister, S. 2010 A revised approach to water footprinting to make transparent the impacts of consumption and production on global freshwater scarcity. *Global Environmental Change* **20**, 113–120.
- SAC 2021 *Robotic Dairy Solutions | Cows*. Available from: <https://www.sacmilking.com/solutions/robotic-dairy-solutions-cows>

- Singh, O., Sharma, A., Singh, R. & Shah, T. 2004 Virtual water trade in dairy economy irrigation water productivity in Gujarat. *Economic and Political Weekly* **39**. doi:10.2307/4415345.
- Steinfeld, H., Mooney, H. A., Schneider, F. & Neville, L. E. 2013 Livestock in a changing landscape. In: *Drivers, Consequences, and Responses, 1*. Island Press, Washington, D.C., USA.
- Thomson, A. 2018 *Water Use in the Dairy Industry –Evaluating Automatic Milking Systems in Nova Scotia MScDalhousie UniversityAgricultural Campus*. Available from: https://nsfa-fane.ca/wp-content/uploads/2018/03/008_Dal_NSFA-Water-Use-Report-Automatic-Milking-Systems.pdf
- Usva, K., Virtanen, E., Hyvärinen, H., Nousiainen, J., Sinkko, T. & Kurppa, S. 2013 Water in an LCA framework – applying the methodology to milk production in Finland. Schenck, R., Huizenga, D. (Eds.), Proceedings of the 9th International Conference on Life Cycle Assessment in the Agri-Food Sector (LCA Food 2014), 8–10 October 2014, San Francisco, USA. ACLCA, Vashon, WA, USA.
- Vanham, D. & Bidoglio, G. 2013 A review on the indicator water footprint for the EU28. *Ecological Indicators* **26**, 61–75.
- Wankhade, P., Singh, M., Tomar, A. K. S., Miranda, C. D., Biswal, P., Verma, M. R., Gaur, G. K., Dutt, T., Pandey, H. O. & Somagond, A. 2021 *Milking frequency affects consumptive water usage in the parlor*. *The Pharma Innovation Journal* **10**(7), 917–919.
- WWF World Wild Fund for Nature 2010 *Water Footprint*. Available from: <https://www.wwf.org.uk/search/water%20footprint>

First received 11 March 2022; accepted in revised form 23 June 2022. Available online 2 July 2022